




Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Including 0.4 m of flexible cable enclosed in a stainless conduit, in-line connector and mounting clamp for installation to RAIL66 mounting system.

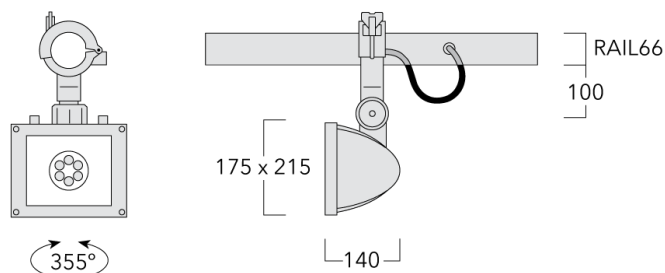

RAIL66

Specifications**Material description**


Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description


Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

Options

Light distribution	Colour temperature	Nominal Watt
 symmetric, wide beam [B]	 3000 K	0 W
 symmetric, medium beam [M]	 4000 K	
 symmetric, very narrow beam [EE]		


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	161-5936	LED-6/18W / 1050 mA - 3000 K	2167.2	21 W	80	3.9
	161-5937	LED-6/26W / 1400 mA - 3000 K	2772	27 W	80	3.9
	161-5938	LED-6/18W / 1050 mA - 4000 K	2268	21 W	80	3.9
	161-5939	LED-6/26W / 1400 mA - 4000 K	2898	27 W	80	3.9
symmetric, very narrow beam [EE] 	161-5940	LED-6/18W / 1050 mA - 3000 K	2165.6	21 W	80	3.9
	161-5941	LED-6/26W / 1400 mA - 3000 K	2770	27 W	80	3.9
	161-5942	LED-6/18W / 1050 mA - 4000 K	2266.4	21 W	80	3.9
	161-5943	LED-6/26W / 1400 mA - 4000 K	2895.9	27 W	80	3.9
symmetric, wide beam [B] 	161-5932	LED-6/18W / 1050 mA - 3000 K	2018.8	21 W	80	3.9
	161-5933	LED-6/26W / 1400 mA - 3000 K	2582.2	27 W	80	3.9
	161-5934	LED-6/18W / 1050 mA - 4000 K	2112.7	21 W	80	3.9
	161-5935	LED-6/26W / 1400 mA - 4000 K	2699.6	27 W	80	3.9

Optical Accessories


Wire guard

Description	Part ID	C1	H1
Wire guard EG	161-9118	181	153




Barn doors

Description	Part ID	A	H1
Barn doors ED	161-9119	245	132




Glare shield

Description	Part ID	A	H1
Glare shield ES	161-9121	165	132




Snoot

Description	Part ID	A	H1
Snoot ET	161-9122	135	155




Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	146-0625	110




Flood lens

Description	Part ID	Additional information
Flood lens IO-360	161-5990	Broadens light distribution in all planes. 'Softens' fringe of beam. Suitable for luminaires with [M] and [EE] distributions. Internal component; factory installed.




Linear spread lens

Description	Part ID	Additional information
Linear spread lens IO-180	161-5989	Broadens light distribution in one plane only. Suitable for luminaires with [M] and [EE] distributions. Internal component; factory installed.



Wallwash lens


Description	Part ID
Wallwash lens IO-20	161-5988



Mounting Accessories


Flat Surface Fitters

Description	Part ID	C1	C2	D1	D2	L	M1	Weight (kg)
Surface fitters (pair)	310-9290	20	30	180	140	1070	9	1.70

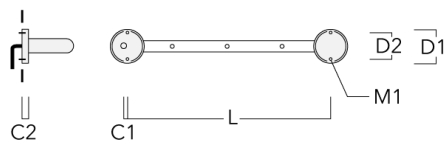

Column Fitters

Description	Part ID	C1	C2	L	M1	Weight (kg)
Column fitters (pair)	310-9294	30	100	1115	12	0.90

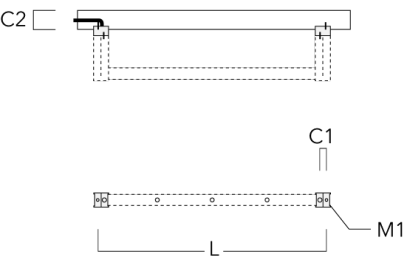


FLB141 LED RAIL66 - Symmetric


RAIL66

Universal

Description	Part ID	C1	C2	H1	M1	Weight(kg)	L1	L2
2 Mains outlets (L=1150)	310-9300	75	30	200	12	5.90	1150	1045

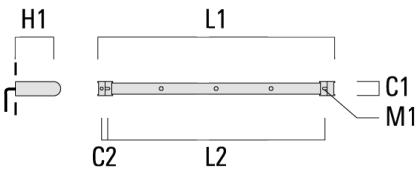


3 Mains outlets (L=1150)	310-9301	75	30	200	12	5.90	1150	1045
--------------------------	----------	----	----	-----	----	------	------	------

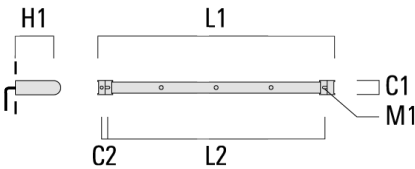


FLB141 LED RAIL66 - Symmetric

RAIL66

Description	Part ID	C1	C2	H1	M1	Weight (kg)	L1	L2
3 Mains outlets (L=1650)	310-9302	75	30	200	12	7.20	1650	1545

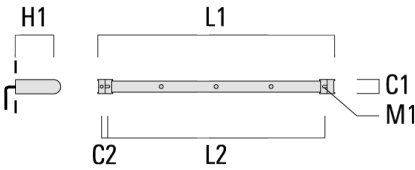


4 Mains outlets (L=1650)	310-9303	75	30	200	12	7.20	1650	1545
--------------------------	----------	----	----	-----	----	------	------	------

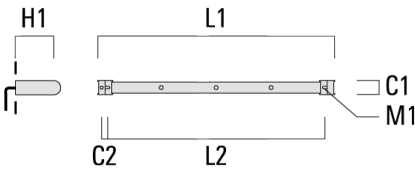


FLB141 LED RAIL66 - Symmetric

RAIL66

Description	Part ID	C1	C2	H1	M1	Weight (kg)	L1	L2
4 Mains outlets (L=2150)	310-9304	75	30	200	12	8.50	2150	2045

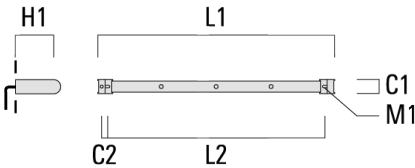

6 Mains outlets (L=2150)	310-9305	75	30	200	12	8.50	2150	2045
--------------------------	----------	----	----	-----	----	------	------	------

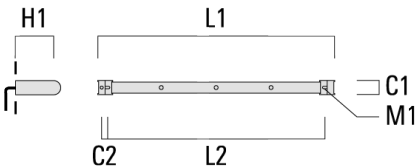


FLB141 LED RAIL66 - Symmetric

RAIL66




Cantilever

Description	Part ID	C1	C2	C3	H1	M1	Weight (kg)	L1	L2
3 Mains outlets (L=1650)	310-9243	220	120	60	600	13	13.30	1650	1570

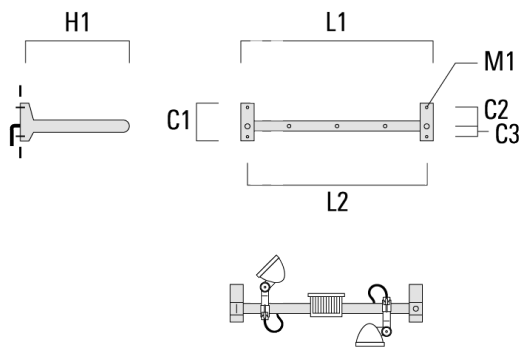


4 Mains outlets (L=1650)	310-9244	220	120	60	600	13	13.30	1650	1570
--------------------------	----------	-----	-----	----	-----	----	-------	------	------

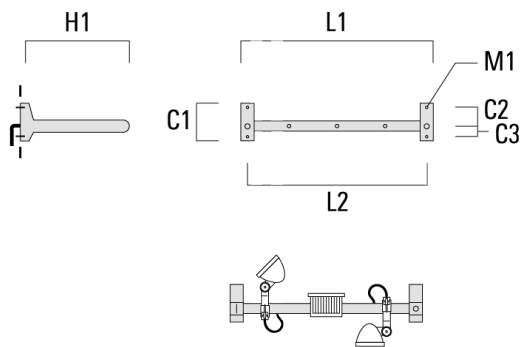


FLB141 LED RAIL66 - Symmetric

RAIL66

Description	Part ID	C1	C2	C3	H1	M1	Weight (kg)	L1	L2
4 Mains outlets (L=2150)	310-9255	220	120	60	600	13	14.60	2150	2070

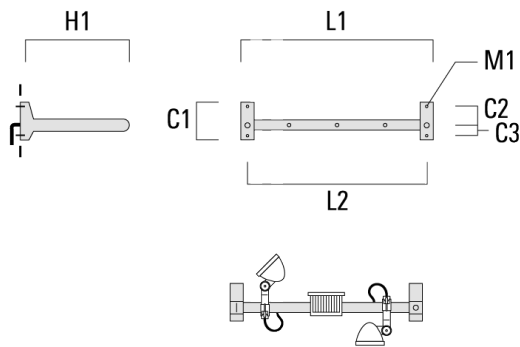


6 Mains outlets (L=2150)	310-9256	220	120	60	600	13	14.60	2150	2070
--------------------------	----------	-----	-----	----	-----	----	-------	------	------

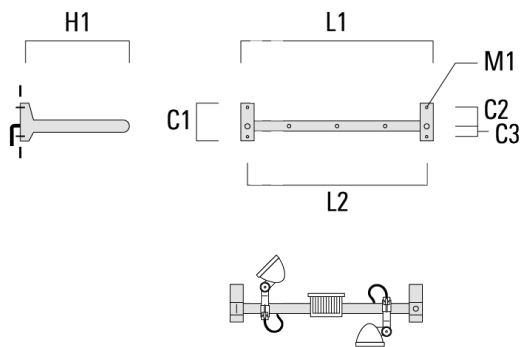


FLB141 LED RAIL66 - Symmetric

RAIL66

Description	Part ID	C1	C2	C3	H1	M1	Weight (kg)	L1	L2
2 Mains outlets (L=1150)	310-9233	220	120	60	600	13	12.00	1150	1070

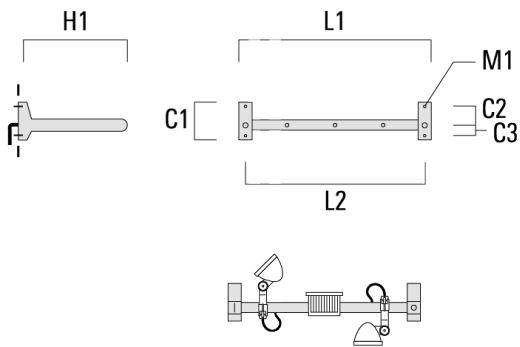

3 Mains outlets (L=1150)	310-9234	220	120	60	600	13	12.00	1150	1070
--------------------------	----------	-----	-----	----	-----	----	-------	------	------

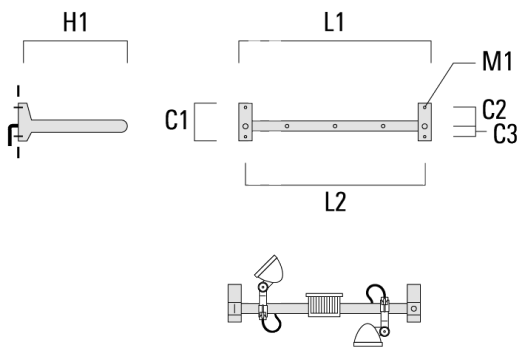

Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	90