OLV334 LED





Description

IP65, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request. Optional 2200 K version available. To be specified at time of ordering.


Can be mounted up or down.


Weight	6.60 kg	
Light distribution	rectangular, side throw [R65]	
Light source	LED-12/24W / 700 mA - 3000 K	
CRI	80	
Power supply	EC	
LEDs	12	
Rated input power	27 W	
Nominal Lumen (lm)		
LED Lumen	290	
Total Lumen	3480	
Tj	85	
Rated lumens (lm)		
LED Lumen	207.1	
Total Lumen	2484.7	
Та	25	

132-0538

OLV334 LED



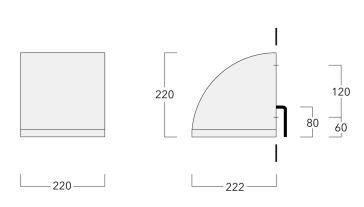



Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium

RAL9007 Grey aluminium

RAL7016 Anthracite grey

RAL9016 Traffic white

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP65
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Standard. Optional DALI version available. To be specified at time of ordering.

Surge protection 1/2 kV (optional SP10)

Additional information

Lifetime $Ta=25^{\circ} L90B10 > 90000h$

Energy efficiency class C-D (Light source)

Fagerhult Lighting Ltd

132-0538

OLV334 LED



Control

DALI interface

Description	Part ID	Additional information	С
DALI interface 430-0	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90
		Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear	
		Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	g