



#### **Description**


IP65, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request. Optional 2200 K version available. To be specified at time of ordering.


Can be mounted up or down.

Weight	11.40 kg
Light distribution	symmetric, very narrow beam, sharp cut-off [EES]
Light source	LED-24/36W / 500 mA - 3000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	39 W
Nominal Lumen (lm)	
LED Lumen	215
Total Lumen	5160
Тј	85
Rated lumens (lm)	
LED Lumen	199
Total Lumen	4776.5
Та	25





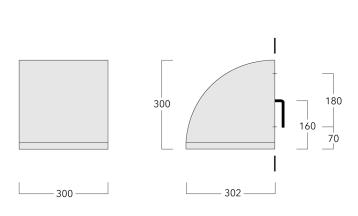

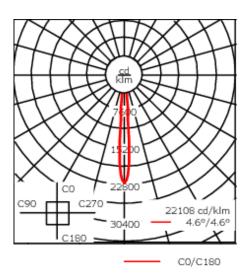

# **Specifications**

# **Material description**

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours

RAL9004 Signal black

RAL9006 White aluminium

RAL9007 Grey aluminium
RAL7016 Anthracite grey

RAL9016 Traffic white

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP65
Impact resistance IK07
Corrosion resistance 5CE

## **Electrical description**

Power supply 220-240V / 50-60 Hz

Driver / Ballast Standard. Optional DALI version available. To be specified at time of ordering.

Surge protection 6/6 kV (optional SP10)

#### Additional information

Lifetime Ta=25° L90B10 > 90000h

Energy efficiency class C-D (Light source)

#### **WE-EF LEUCHTEN GmbH**





# **Control**

### **DALI** interface

Description	Part ID	Additional information	С
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90
		Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed	
		-Event priorities defined	
	-Separate addressing & grouping from control gear		
		Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing	)
	and the command scope has changed!		