



WE-EF LIGHTING

Installation and Maintenance
Instructions

Wall Luminaires Surface Mounted

PLS420 LED

PLS430 LED



Do not open during installation

This product is factory-sealed.
Refer to the instructions contained in this document for details.



Surge Protection

This product features built-in surge protection circuitry in compliance with applicable standards.


For comprehensive protection of a luminaire installation against lightning and electrical surges, it is essential to cover mains supply and data input lines at the distribution board level, by using respective primary (Type 1) and secondary (Type 2) surge arrestors in compliance with EN61643-11/ IEC61643-1.

Warning


Ensure that all required surge protection measures are in place and activated prior to luminaire installation. Also, disconnect luminaires before operating high-power devices such as, for example, electrical arc welders.

Wall Luminaires Surface Mounted

PLS420

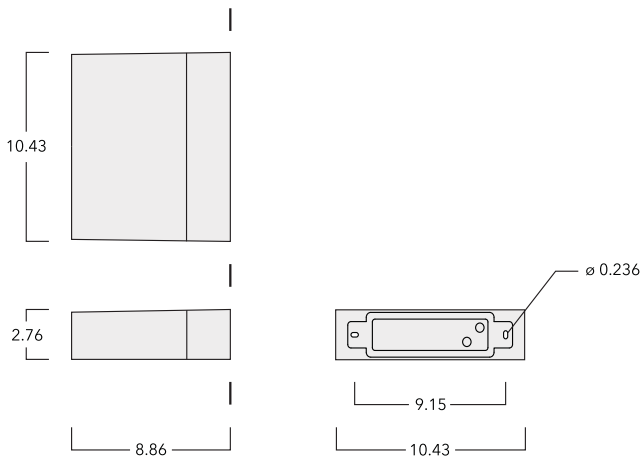

PLS430

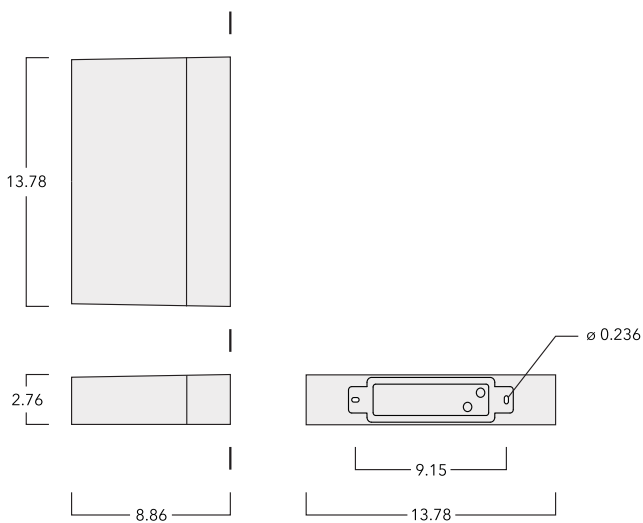

IP66, IK08. Class I, $t_a = 40^\circ\text{C}$

Light Source

LED

Maintenance

Apart from cleaning the product's exterior surfaces, no special maintenance work is required.

Do not use high-pressure cleaners.

In case of component failure due to abnormal circumstances or at end of life, replacement must be carried out by a suitably qualified and trained professional.

Warning: Do not open luminaire while mains supply is switched on.

Installation

The product must be installed and maintained by a suitably qualified professional in compliance with latest building/construction and/or electrical regulations and relevant legislation.

Warning: Switch off mains electrical supply prior to installing and connecting the luminaire.


Notice: If the luminaire is modified by anybody other than the original manufacturer, then the warranty will no longer be valid and shall become the full responsibility of the modifying person/organisation. Claims based on defects attributable to improper installation and/or application, and the consequences thereof, are excluded.

Attention: The luminaire is factory-sealed and does not need to be opened during installation.

The installation on site must comply with local and/or national health and safety regulations.


Installation Procedure

1) Switch off mains electrical supply.




2a) ON-OFF version

Remove wall flange **A** from luminaire housing **B** by loosening screws **C**. Pull off terminal connector **D**.

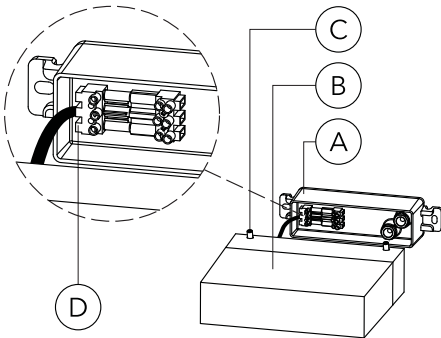

2b) Dimming versions (0-10 V)

Remove wall flange **A** from luminaire housing **B** by loosening screws **C**. Pull off terminal connector **D**. Remove terminal cover **L**.

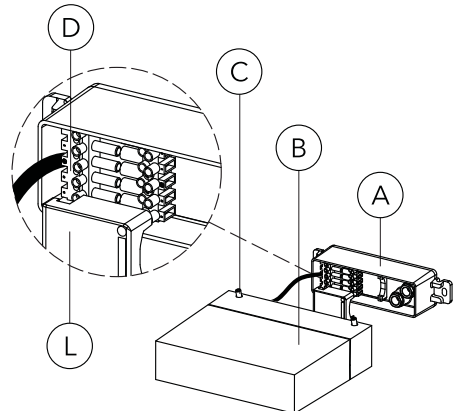


- 3) Check that rating shown on luminaire label conforms with mains electrical supply.



(example)


- 5) Feed mains supply cable **H** (and second cable **I** for through wiring, if required) through pressure screw(s) **J**, while setting wall flange **A** in position.

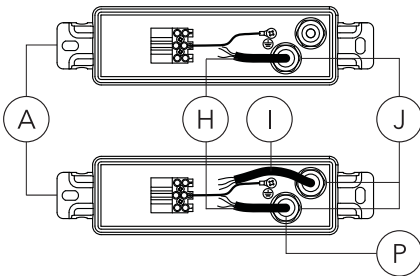

The pre-installed packing ring **P** is suitable for cable diameters 0.276 to 0.374 in.




For larger cable diameters (0.354 to 0.472 in) use the auxiliary packing ring supplied.

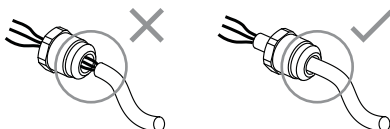


- 4) Determine position for fixing screws **E**.
Drill relevant holes **F** and insert nylon plugs **G** (not supplied by WE-EF).

Warning: Ensure not to damage any electrical cable, water pipe or other items drilling holes. Fixture is intended to be mounted over a UL listed junction box (not supplied by WE-EF), use provided wall plate to cover boxes larger than the outer dimensions of the luminaire.

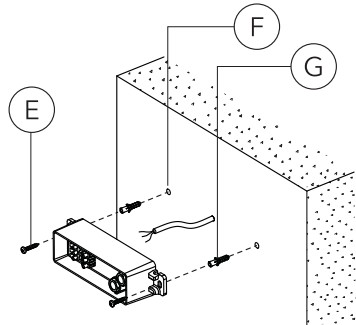


- 6) To fix wall flange **A**, insert and tighten screws **E**. The orientation of wall flange **A** determines orientation of luminaire (up or down)

Uplight



Downlight





7) Connect leads of mains supply cable **H** (and second cable **I** for through wiring, if required) to respective terminals of socket **K**:

a) ON/OFF (L = Phase, N = Neutral, ⊕ = Earthing)




b) 0-10 V (L = Phase, N = Neutral, ⊕ = Earthing, D-/D+ = 0-10 V control line).

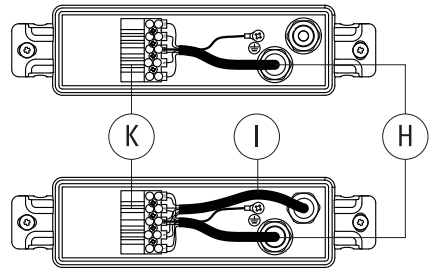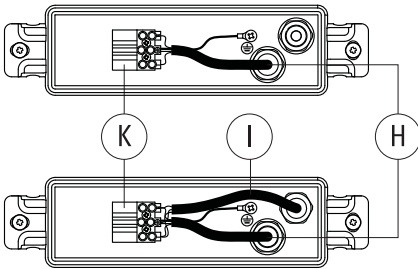

8a) ON-OFF version

Position luminaire housing **B** over wall flange **A** and reconnect terminal connector **D**.


Tighten 4 screws **C** both on top and bottom.

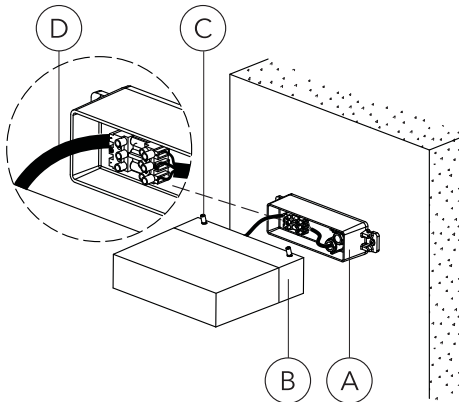

8b) Dimming versions (0-10 V)

Position luminaire housing **B** over wall flange **A** and reconnect terminal connector **D**.

Return terminal cover **L**. Tighten 4 screws **C** both on top and bottom.

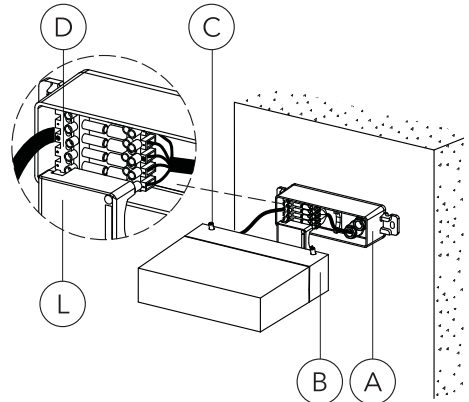

we-ef

www.we-ef.com

WE-EF LIGHTING

United States of America

Tel +1 724 742 0030

Fax +1 724 742 0035

info.usa@we-ef.com

TO9251W0422 © WE-EF 2022

Technical specifications are
subject to change.