

FLB141 LED Wall bracket - Asymmetric




Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

Weight	6.3 kg
Light distribution	asymmetric, side throw [S70]
Light source	LED-6/18W / 1050 mA - 3000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	21 W
Nominal Lumen (lm)	
LED Lumen	430
Total Lumen	2580
Tj	85
Rated lumens (lm)	
LED Lumen	266.2
Total Lumen	1597.1
Ta	25

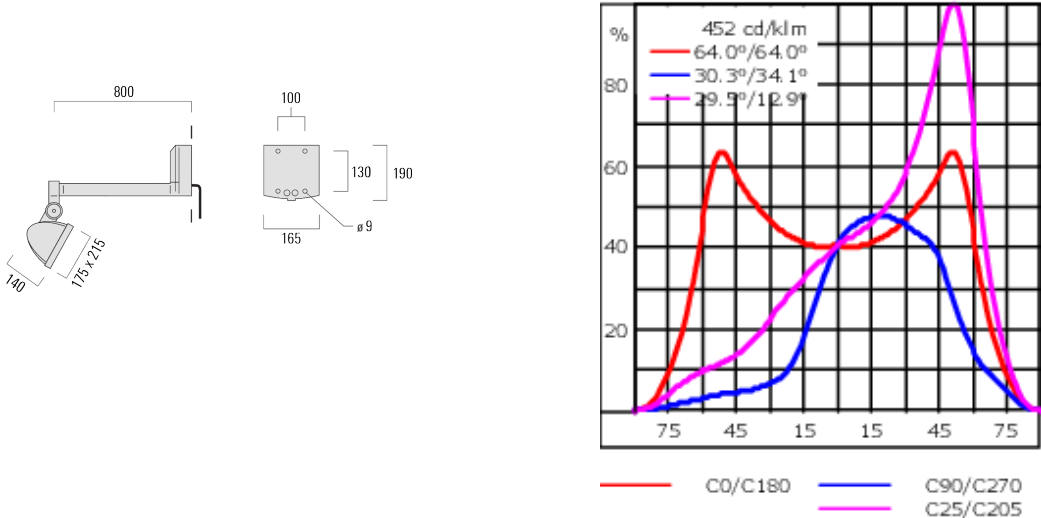

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description


Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information

Optical Accessories


Wire guard

Description	Part ID	C1	H1
Wire guard EG	161-9118	181	153



Barn doors


Description	Part ID	A	H1
Barn doors ED	161-9119	245	132



FLB141 LED Wall bracket - Asymmetric


Glare shield

Description	Part ID	A	H1
Glare shield ES	161-9121	165	132



Snoot

Description	Part ID	A	H1
Snoot ET	161-9122	135	155



FLB141 LED Wall bracket - Asymmetric

Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

FLB141 LED Wall bracket - Asymmetric

DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	90