

Description

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG[®] Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.


Including terminal box, for mounting on ø 48-60 mm pipes or space frames.

Mains voltage versions only, ON-OFF Class I or DALI interface available on request (converter in thermally-separated compartment); refer to accessory listings.

Weight	1.70 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-1/6W / 500 mA - 4000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	7.5 W
Rated lumens (lm)	
LED Lumen	610.6
Total Lumen	610.6
Та	25
Nominal Lumen (lm)	
LED Lumen	720
Total Lumen	720
Тс	25

we-ef

FLC301 Space frame

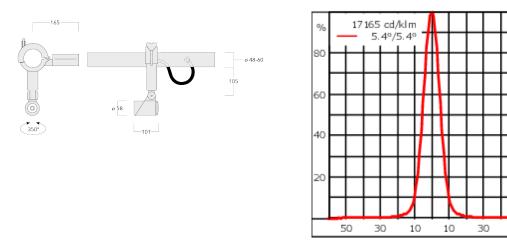

- C0/C180

50

Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	RAL9004 Signal black
	RAL9006 White aluminium
	RAL9007 Grey aluminium
Gasket	Silicone CCG [®] Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment	
------------------	---	--

Additional information

Lifetime Ta=25° L90B10 > 90000h

FLC301 Space frame



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

e

Description	Part ID	Additional information
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).
		Dali 2.0
		-Application controllers and Input devices defined
		-Single-masters and multi-masters allowed
		-Event priorities defined
		-Separate addressing & grouping from control gear
		Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!


FLC301 Space frame



Optical Accessories


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	145-7229	42.5



Wallwash lens

Description	art ID C1
allwash lens 10-20	45-7230 42.5




FLC301 Space frame




Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	145-7231	42.5



Glare shield

scription Part ID A C1
shield ES 145-7232 20.5



FLC301 Space frame



Snoot

