

FLC301 Space frame

**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Including terminal box, for mounting on ø 48-60 mm pipes or space frames.

Mains voltage versions only, ON-OFF Class I or DALI interface available on request (converter in thermally-separated compartment); refer to accessory listings.

Weight	1.70 kg
Light distribution	linear spread, very narrow beam, sharp cut-off [EES]
Light source	LED-1/4W / 350 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	5 W



Nominal Lumen (lm)

LED Lumen	455
Total Lumen	455
T _j	85

Rated lumens (lm)

LED Lumen	343.5
Total Lumen	343.5
T _a	25

FLC301 Space frame

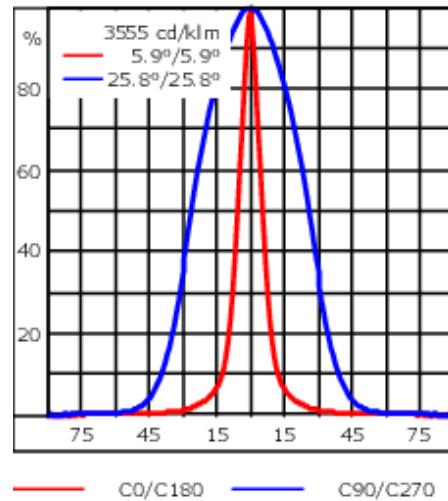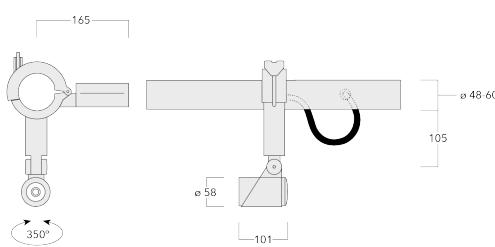

Specifications

Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium

RAL9007 Grey aluminium

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66

Impact resistance IK07

Corrosion resistance 5CE+Primer

Electrical description

Driver / Ballast Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime Ta=25° L90B10 > 90000h

FLC301 Space frame

Control**1-10 V analogue dimming interface**

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90


DALI interface

Description	Part ID	Additional information
DALI interface	430-0013	<p>DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).</p> <p>Dali 2.0</p> <ul style="list-style-type: none"> -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear <p>Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!</p>

Optical Accessories

Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	145-7229	42.5



C1

Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	145-7230	42.5




C1


FLC301 Space frame

Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	145-7231	42.5

**Glare shield**

Description	Part ID	A	C1
Glare shield ES	145-7232	20.5	58

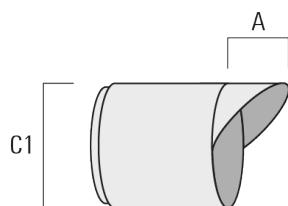

FLC301 Space frame

Snoot

Description	Part ID	A	C1
Snoot ET	145-7233	22.5	58

