

Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007 or white RAL 9016. Safety glass lens. Silicone CCG[®] Controlled Compression Gasket.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC [®] One LED Concept. Two cable entries.


Luminaire can be mounted for up or down lighting.

IK10 on request with polycarbonate lens. Optional 2200 K version available. To be specified at time of ordering.

Weight	6.60 kg
Light distribution	asymmetric, forward throw [A60]
Light source	LED-12/12W / 350 mA - 4000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	13.9 W
Nominal Lumen (lm)	
LED Lumen	170
Total Lumen	2040
Тј	85
Rated lumens (lm)	
LED Lumen	134.9
Total Lumen	1619.1
Та	25

533 cd/klm

C90/C270

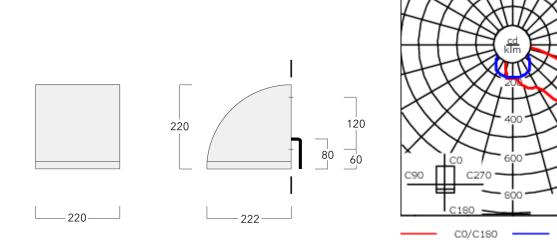

Specifications Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	RAL9004 Signal black
	RAL9006 White aluminium
	RAL9007 Grey aluminium
Gasket	Silicone CCG [®] Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz	
Driver / Ballast	Integral EC electronic converter	

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement
	located on www.we-ef.com for further details.

132-0531

OLV334 LED



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

132-0531

OLV334 LED

DALI interface

Description	Part ID	Additional information	С
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90
		Dali 2.0	
		-Application controllers and Input devices defined	
		-Single-masters and multi-masters allowed	
		-Event priorities defined	
		-Separate addressing & grouping from control gear	
		Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	