


# RLS410 LED

## Surface Mounted Wall Luminaires

**we-ef**

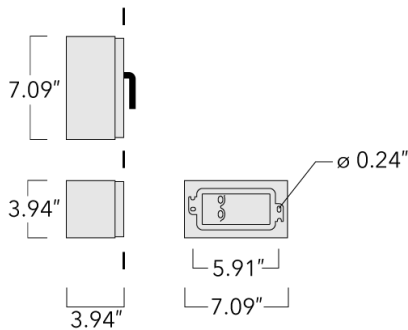

### Description

Surface-mounted wall luminaire.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Luminaire can be mounted for up or down lighting. Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC





410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

**Surface Mounted Wall Luminaires****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

---

**Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

---

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# RLS410 LED

## Surface Mounted Wall Luminaires



### Options

#### Light distribution



rectangular asymmetric Type II [R45]



symmetric, medium beam [M]



symmetric, narrow beam [N]

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt

0 W




#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)	
rectangular asymmetric Type II [R45] 	131-9601	LED-3/6W / 700 mA - 2700 K	510.4	7.5 W	80	4.19	
	131-9602	LED-3/9W / 1050 mA - 2700 K	734.3	11 W	80	4.19	
	131-9603	LED-3/13W / 1400 mA - 2700 K	931.3	15.8 W	80	4.19	
	131-9960	LED-3/6W / 700 mA - 3000 K	548.2	7.5 W	80	4.19	
	131-9961	LED-3/6W / 700 mA - 4000 K	586	7.5 W	80	4.19	
	131-9962	LED-3/9W / 1050 mA - 3000 K	770.1	11 W	80	4.19	
	131-9963	LED-3/9W / 1050 mA - 4000 K	805.9	11 W	80	4.19	
	131-9964	LED-3/13W / 1400 mA - 3000 K	985	15.8 W	80	4.19	
	131-9965	LED-3/13W / 1400 mA - 4000 K	1029.8	15.8 W	80	4.19	
symmetric, medium beam [M] 	131-9604	LED-3/6W / 700 mA - 2700 K	650.4	7.5 W	80	4.19	
	131-9605	LED-3/9W / 1050 mA - 2700 K	972.4	11 W	80	4.19	
	131-9606	LED-3/13W / 1400 mA - 2700 K	1233.3	15.8 W	80	4.19	
	131-9966	LED-3/6W / 700 mA - 3000 K	698.5	7.5 W	80	4.19	
	131-9967	LED-3/6W / 700 mA - 4000 K	746.7	7.5 W	80	4.19	
	131-9968	LED-3/9W / 1050 mA - 3000 K	1019.9	11 W	80	4.19	
	131-9969	LED-3/9W / 1050 mA - 4000 K	1067.3	11 W	80	4.19	
	131-9970	LED-3/13W / 1400 mA - 3000 K	1304.5	15.8 W	80	4.19	
	131-9971	LED-3/13W / 1400 mA - 4000 K	1363.8	15.8 W	80	4.19	
	symmetric, narrow beam [N] 	131-9607	LED-3/6W / 700 mA - 2700 K	611.6	7.5 W	80	4.19
		131-9608	LED-3/9W / 1050 mA - 2700 K	986.2	11 W	80	4.19
131-9609		LED-3/13W / 1400 mA - 2700 K	1250.7	15.8 W	80	4.19	
131-9972		LED-3/6W / 700 mA - 3000 K	656.9	7.5 W	80	4.19	
131-9973		LED-3/6W / 700 mA - 4000 K	702.2	7.5 W	80	4.19	
131-9974		LED-3/9W / 1050 mA - 3000 K	1034.3	11 W	80	4.19	
131-9975		LED-3/9W / 1050 mA - 4000 K	1082.4	11 W	80	4.19	
131-9976		LED-3/13W / 1400 mA - 3000 K	1322.9	15.8 W	80	4.19	
131-9977		LED-3/13W / 1400 mA - 4000 K	1383	15.8 W	80	4.19	

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

**Surface Mounted Wall Luminaires**

**Optical Accessories**

**Colour correction filter**

---

Description	Part ID
IF-3000K > 2400K	131-9556


---

**Honeycomb louvre**

---

Description	Part ID
Honeycomb louvre IW	131-9555

---



# RLS410 LED



## Surface Mounted Wall Luminaires

### Mounting Accessories

#### Surface Collar

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
RLS410 Surface Collar	131-6002	3.94	7.09	1.75	∅1	∅1.75	∅0.38	2.75	5.75

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024