#### FLC131 LED - Wall bracket



#### Description


IP66, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.


Knuckle permits 350° horizontal and 180° vertical aiming of optics.

Weight	4.50 kg		
Light distribution	symmetric, very narrow beam, sharp cut-off [EES]		
Light source	LED-12/24W / 700 mA - 4000 K		
CRI	80		
Power supply	EC		
LEDs	12		
Rated input power	27 W		
Nominal Lumen (lm)			
Nominal Lumen (lm)			
Nominal Lumen (lm) LED Lumen	310		
	310 3720		
LED Lumen			
LED Lumen Total Lumen	3720		
LED Lumen Total Lumen Tj	3720		
LED Lumen Total Lumen Tj <b>Rated lumens (Im)</b>	3720 85		

# we-ef

# FLC131 LED - Wall bracket

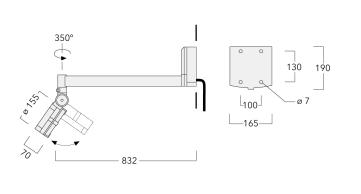

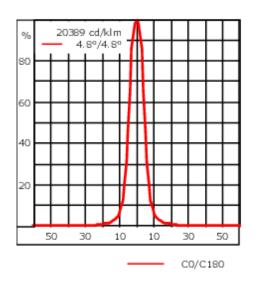

# Specifications Material description

Body	Marine-grade, die-cast aluminium alloy				
Lens	Safety glass lens				
Colours	RAL9004 Signal black				
	RAL9006 White aluminium				
	RAL9007 Grey aluminium				
Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket				
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)				
Ingress protection	IP66				
Impact resistance	IK07				
Corrosion resistance	5CE+Primer				

# **Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

# **Additional information**


Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

FLC131 LED - Wall bracket

# we-ef


# **Optical Accessories**

## Glare shield



#### Snoot

Description	А	C1
noot ET	95,5	126




## FLC131 LED - Wall bracket




#### Surface wash lens

Description	Part ID	C1
10-360	146-0419	110



# Linear louvre

scription Part ID	C1
ear louvre IL 146-9055	110



## FLC131 LED - Wall bracket




### Linear spread lens

Description	on Part ID C1
10-180-FLC131-LED	LC131-LED 146-0418 110



# Wallwash lens

Description	Part ID	C1
IO-20-WW-FLC131-LED	185-7029	110




# FLC131 LED - Wall bracket



#### Honeycomb louvre

Description	Part ID	C1
IW-FLC131-LED	146-0625	110



# FLC131 LED - Wall bracket

# Control

# **DALI interface**

Description	Part ID	Additional information
DALI interface 430-0013	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).
		Dali 2.0
		-Application controllers and Input devices defined
		-Single-masters and multi-masters allowed
		-Event priorities defined
		-Separate addressing & grouping from control gear
		Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!