




Description

Marker Light.

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

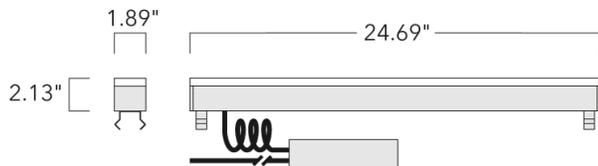

The installation blackout to be ordered separately; blockouts can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must

Inground Luminaires

be specified separately. Example: XXX-XXXX-9004 (Black)+
XXX-XXXX (Accessory 1)

Inground Luminaires

Specifications

Material description

| | |
|--------------------|--|
| Body | Marine-grade all aluminium construction. Anodized aluminium extrusion. |
| Lens | Safety glass lens; max. static load 3 tonnes |
| Colors | |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP69K - HIGHEST PROTECTION RATING AVAILABLE |
| Impact resistance | IK08 |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Electronic converter with 0-10V interface |
| Power factor | > 0.9 |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

ETV129 LED MARKER LIGHT

Inground Luminaires

Options

Light distribution



diffused distribution

Color temperature



3000 K

red

green

blue




2700 K

Nominal Watt

0 W


Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|---|----------|----------------------|------------------|-------------------|-----|-------------|
| diffused distribution  | 186-0358 | LED-32/3W/W - 3000 K | 131.8 | 5.5 W | 80 | 10.14 |
| | 186-0361 | LED-32/2W/R | 65.9 | 5 W | 20 | 10.14 |
| | 186-0364 | LED-32/3W/G | 131.8 | 5.5 W | 20 | 10.14 |
| | 186-0367 | LED-32/3W/B | 17.6 | 5.5 W | 20 | 10.14 |
| | 186-0450 | LED-32/3W/W - 2700 K | 131.8 | 5.5 W | 80 | 10.14 |

Electrical Accessories

Sealable junction box


| Description | Part ID | C1 | M1 | M2 |
|-------------------------------|----------|------|--------|---------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | Ø 0.39 | Ø 0.47 - 0.75 |

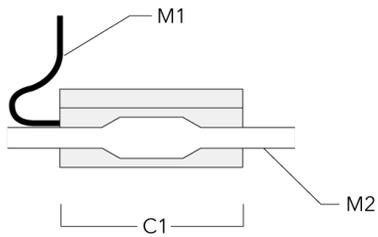


Mounting Accessories

Installation blackout, Type I

| Description | Part ID | A | C1 | D1 | D2 | Weight (lb) |
|------------------------------|----------|-------|------|------|------|-------------|
| BEV120-I-1/627 (1 luminaire) | 186-0306 | 26.58 | 6.30 | 2.13 | 4.72 | 7.48 lbs |

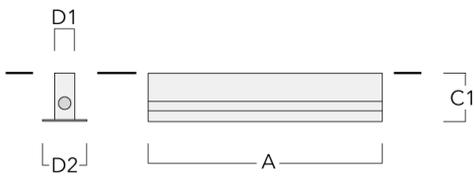


| | | | | | | |
|-------------------------------|----------|-------|------|------|------|-------|
| BEV120-I-2/627 (2 luminaires) | 186-0307 | 51.34 | 6.30 | 2.13 | 4.72 | 13.79 |
|-------------------------------|----------|-------|------|------|------|-------|

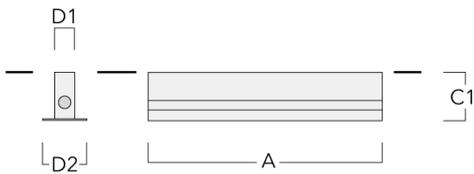


ETV129 LED MARKER LIGHT

Inground Luminaires

| Description | Part ID | A | C1 | D1 | D2 | Weight (lb) |
|-------------------------------|----------|------|------|------|------|-------------|
| BEV120-I-3/627 (3 luminaires) | 186-0308 | 76.1 | 6.30 | 2.13 | 4.72 | 20.11 |

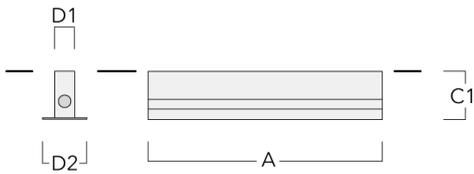

| | | | | | | |
|-------------------------------|----------|--------|------|------|------|-------|
| BEV120-I-4/627 (4 luminaires) | 186-0309 | 100.87 | 6.30 | 2.13 | 4.72 | 26.46 |
|-------------------------------|----------|--------|------|------|------|-------|

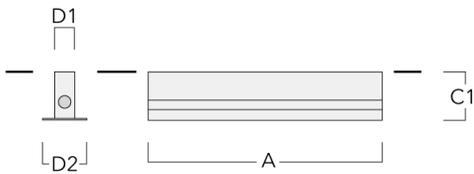

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/05/2026