

146-7057+146-0439

FLC141 LED - Wall bracket



Description

IP66, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Knuckle permits 350° horizontal and 180° vertical aiming of optics.



2700 K option available on request.

| | |
|---------------------------|--|
| Weight | 5.80 kg |
| Light distribution | linear spread, very narrow beam, sharp cut-off [EES] |
| Light source | LED-24/48W / 700 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 24 |
| Rated input power | 54 W |
| Nominal Lumen (lm) | |
| LED Lumen | 310 |
| Total Lumen | 7440 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 271.9 |
| Total Lumen | 6526 |
| Ta | 25 |

WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - <https://we-ef.com/aus>
Subject to technical changes and errors. - Generated on 14/08/2025

FLC141 LED - Wall bracket

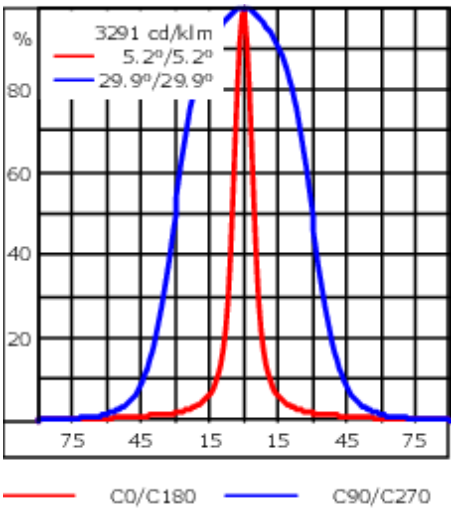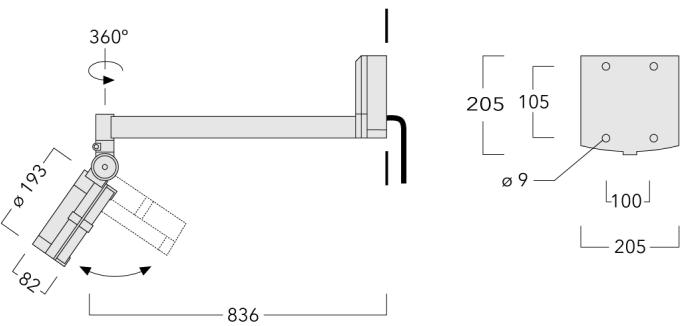

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|---|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |


Additional information

| | |
|----------|--|
| Lifetime | Ta=40° L90B10 > 90000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

Optical Accessories


Glare shield

| Description | Part ID | A | C1 |
|-----------------|----------|-----|-----|
| Glare shield ES | 146-0229 | 120 | 145 |



Snoot


| Description | Part ID | A | C1 |
|-------------|----------|-----|-----|
| Snoot ET | 146-0398 | 120 | 145 |



FLC141 LED - Wall bracket


Linear spread lens

| Description | Part ID | C1 |
|-------------------|----------|-----|
| IO-180-FLC141-LED | 146-0439 | 145 |



Surface wash lens


| Description | Part ID | C1 |
|-------------------|----------|-----|
| IO-360-FLC141-LED | 146-9950 | 145 |



FLC141 LED - Wall bracket

Wallwash lens

| Description | Part ID | C1 |
|---------------------|----------|-----|
| IO-20-WW-FLC141-LED | 146-0646 | 145 |



Linear louvre


| Description | Part ID | C1 |
|---------------------------------|----------|-----|
| Linear louvre IL for FLC141 LED | 146-9056 | 145 |



FLC141 LED - Wall bracket

Honeycomb louvre

| Description | Part ID | C1 |
|---------------|----------|-----|
| IW-FLC141-LED | 146-0626 | 145 |



Control**DALI interface**

| Description | Part ID | Additional information |
|----------------|----------|---|
| DALI interface | 430-0013 | <p>DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).</p> <p>Dali 2.0</p> <ul style="list-style-type: none">-Application controllers and Input devices defined-Single-masters and multi-masters allowed-Event priorities defined-Separate addressing & grouping from control gear <p>Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!</p> |