





Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Weight	0.90 kg
Light distribution	Shielded
Light source	LED-6W / 350 mA - 3000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	8 W
Rated lumens (lm)	
LED Lumen	18.7
Total Lumen	18.7
Ta	25
Nominal Lumen (lm)	
LED Lumen	1050
Total Lumen	1050
Tc	25

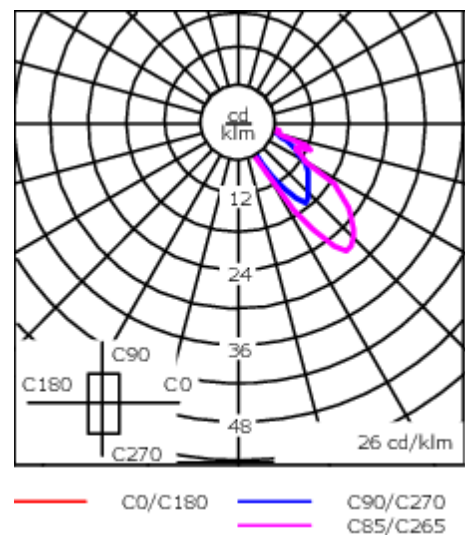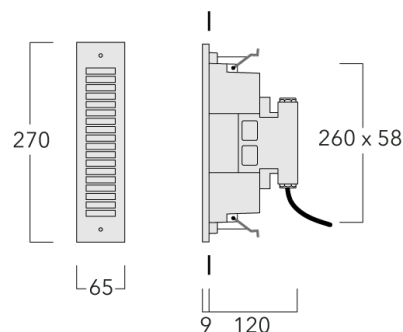

Specifications  
Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate
Colours	<div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9
Surge protection	1-2/2 kV

190-9017

SVL134 LED

**we-ef**


**Additional information**

Lifetime	Ta=25° L80B10 > 54000h
Energy efficiency class	C (Light source)


Mounting Accessories

Installation blackout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (kg)
Installation blackout BST13-II	190-9031	145	22	270	280	338	65	75	107	0.90

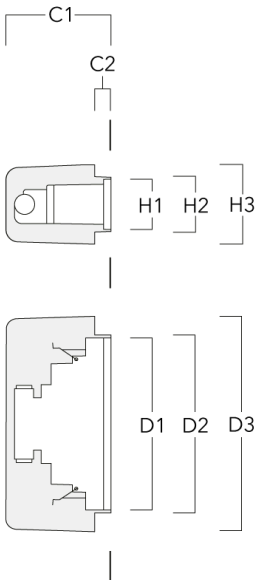

Installation blackout BST13-I	190-9030	130	12	270	338	65	107	0.90
-------------------------------	----------	-----	----	-----	-----	----	-----	------

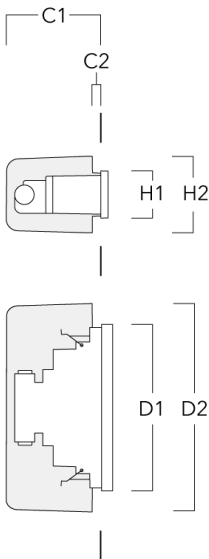

Control

DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).  Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear  Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	90