





Description

IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.

Pre-installation blockout is recommended for mounting in concrete, available on request.

Weight	0.90 kg
Light distribution	floor wash
Light source	LED-6W / 350 mA - 4000 K
CRI	80
Power supply	EC
BUG	B0 U1 G0
LEDs	1
Rated input power	8 W
Rated lumens (lm)	
LED Lumen	180.7
Total Lumen	180.7
Ta	25
Nominal Lumen (lm)	
LED Lumen	1110
Total Lumen	1110
Tc	25

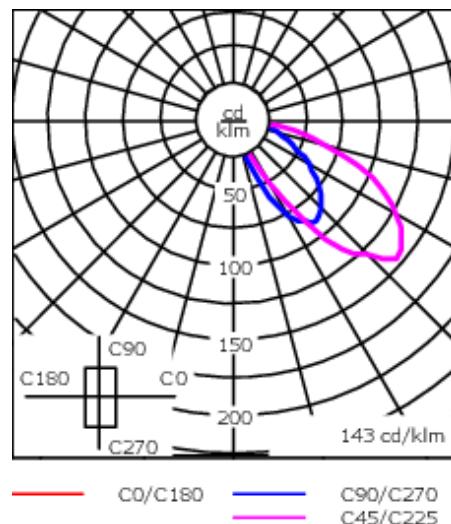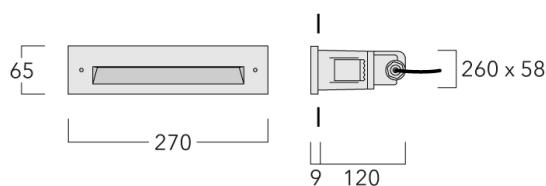

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Signal black </div> <div style="text-align: center;"> RAL9006 White aluminium </div> <div style="text-align: center;"> RAL9007 Grey aluminium </div> <div style="text-align: center;"> RAL7016 Anthracite grey </div> <div style="text-align: center;"> RAL9016 Traffic white </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9
Surge protection	1-2/2 kV

Additional information


Lifetime Ta=25° L80B10 > 54000h

Energy efficiency class C (Light source)


Mounting Accessories

Installation breakout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight(kg)
Installation breakout BST13-I	190-9030	130	12	270	338		65	107		0.90

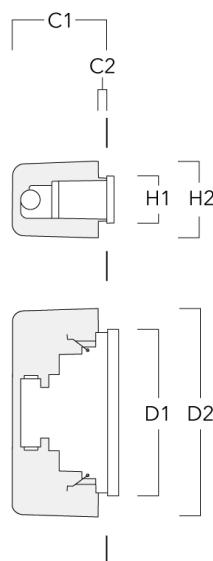

Installation breakout BST13-II	190-9031	145	22	270	280	338	65	75	107	0.90
--------------------------------	----------	-----	----	-----	-----	-----	----	----	-----	------

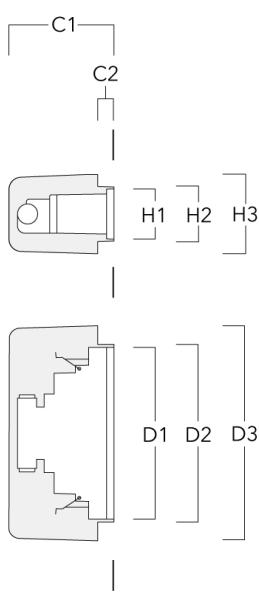

Control

DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear	90

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!