




Installation Instruction Sheet

we-ef

BUC 230 LED SERIES BULKHEAD

Please read and understand these instructions before proceeding with installation of luminaire incoming supply 240VAC
Cable size 2.5mm sq 3 core circular or TPS flat twin and earth.

NOTE: LED luminaires are static sensitive devices. Please ensure that the appropriate ESD measures are taken before opening luminaire. If in doubt please contact WE-EF.

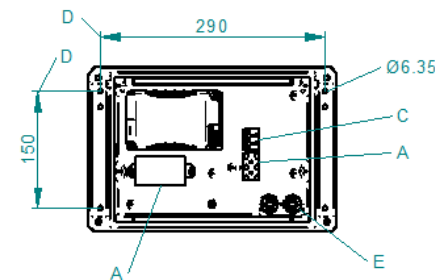


- Remove luminaire from carton
- Unfasten cover by unscrewing cover screws **A**
Note cover will be retained by hinges*

- Unscrew heatsink screws **B**, placing in a safe location for reassembly
- Withdraw heatsink, ensuring to disconnect supply plug **C**

- If using rear entry/ies **E**, pass cables through gland, ensuring the correct grommet for the application is used.

- If using side entry **F**, close off rear entries using M20x1.5 blanking plugs. Fit side entry glands, supplied by others.

- Affix housing to surface using suitable fasteners through holes **D**. Orient as per the aiming arrow if required.

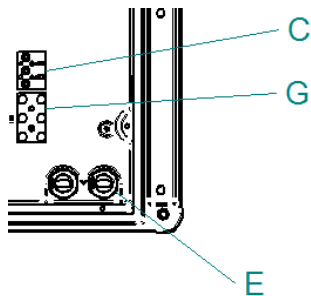

- Terminate supply cables into 10mm sq terminal block **G**

- Reassembly is the reverse procedure, ensuring that
 - Cable **C** is reconnected
 - Heatsink fastened using screws **B**
 - Cover refastened using screws **A**