


Floodlights

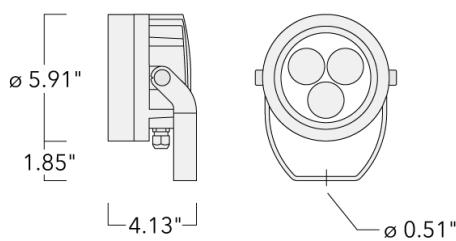

Description

RGBW/RGBA Color Changer.

IP66, Class III. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request. Integral driver in separate driver box (constant current), prewired; to be ordered separately. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. Color Changer technology. DMX interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Floodlights**Specifications****Material description**

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors  RAL9004 Black

 RAL9007 Grey Metallic

 RAL9016 White

 RAL8019 Dark Bronze

Gasket CCG® Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66

Impact resistance IK07

Corrosion resistance 5CE

Windage 0.018 m²

Electrical description

Driver / Ballast DMX

Power factor > 0.9

Additional information

Lifetime Ta=25° L90B10 > 90000h

Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Floodlights**Options****Light distribution****Color temperature****Nominal Watt**

symmetric, wide beam [W]

RGBW/4K



0 W



symmetric, medium beam [M]


RGB A

Floodlights**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	139-2411	LED-3/12W - RGBW/4K	898.4	14 W	20/80	8.80
	139-2413	LED-3/12W - RGBA	791.4	14 W	20	8.80
symmetric, wide beam [W] 	139-2408	LED-3/12W - RGBW/4K	889.2	14 W	20/80	8.80
	139-2410	LED-3/12W - RGBA	783.2	14 W	20	8.80


Floodlights**Optical Accessories****Glare shield**

Description	Part ID	A	C1
ES-FLC210-LED	139-2406	3.39	5.87
ES-FLC210-CC-LED	139-6981	3.39	5.87




Floodlights**Snoot**

Description	Part ID	A	C1
ET-FLC210-LED	139-2407	3.39	5.87




ET-FLC210-CC-LED 139-6982 3.39 5.87




Floodlights**Electrical Accessories****Gear box**

Description	Part ID	A	B	C1	C2	Weight(lb)
GB200 R200x120 gear box (medium) (120-277V, 0-10V)	139-2526	2.95	4.72	9.02	7.87	1.05

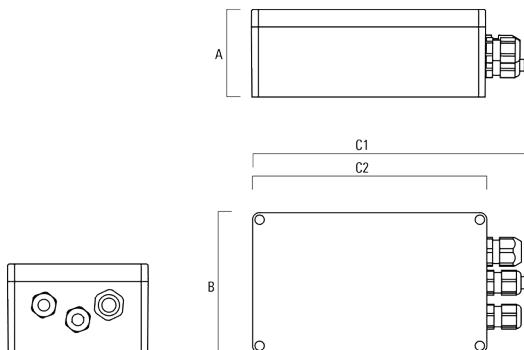


GB200 R230x140 gear box (large)	139-2527	95	140	259	230	1.20
---------------------------------	----------	----	-----	-----	-----	------

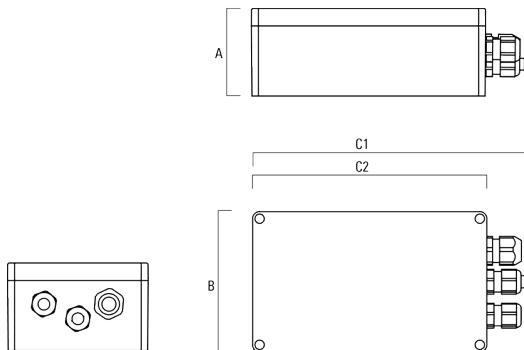



Floodlights

Description	Part ID	A	B	C1	C2	Weight(lb)
FLC210 RGBW Gear Box	139-6979	3	4.7	9	7.9	


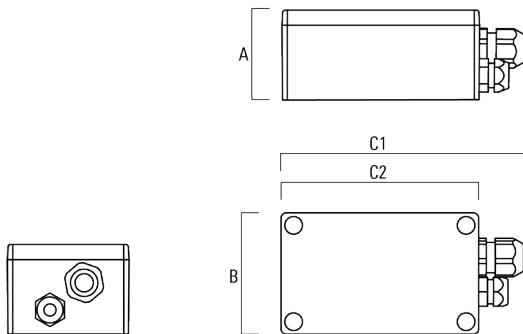


Floodlights**Mounting Accessories****Pole clamp PC**

Description	Part ID	D1	Weight (lb)
PC2 76-89/60 Pole clamp, double (\emptyset 3"-3.5")	139-2703	3.0-3.50	2.20

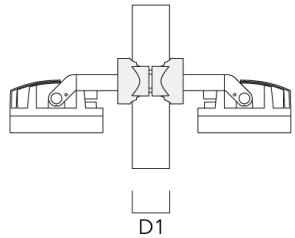
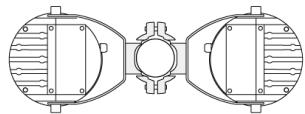


PC1 76-89/60 Pole clamp, single (\emptyset 3"-3.5")	139-2702	3.0-3.50	2.20
--	----------	----------	------





Floodlights

Description	Part ID	D1	Weight (lb)
PC2 102-114/60 Pole clamp, double (Ø 4"-4.5")	139-2707	4.0-4.50	2.65

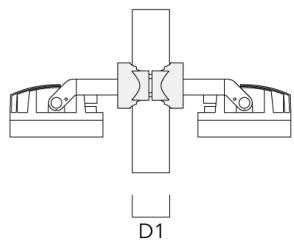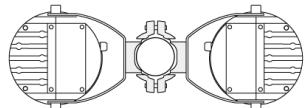


PC1 102-114/60 Pole clamp, single (Ø 4"-4.5")	139-2706	4.0-4.50	2.65
--	----------	----------	------




Floodlights

Description	Part ID	D1	Weight (lb)
PC2 114-133/60 Pole clamp, double (Ø 4.5"-5.25")	139-2709	4.5-5.25	3.10


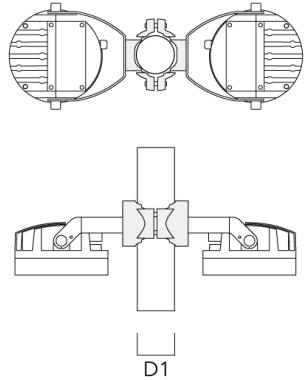


PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")	139-2708	4.5-5.25	3.10
---	----------	----------	------

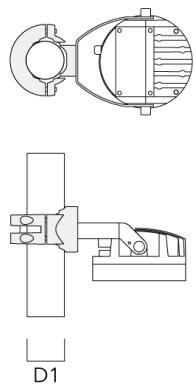

Floodlights

Description	Part ID	D1	Weight (lb)
PC2 82-109/60 Pole clamp, double (Ø 3.25"-4.25")	139-2705	3.20-4.30	2.40

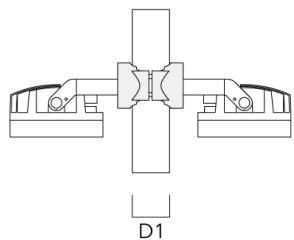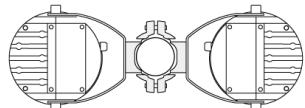

PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3")	139-2704	3.20-4.30	2.40
---	----------	-----------	------

