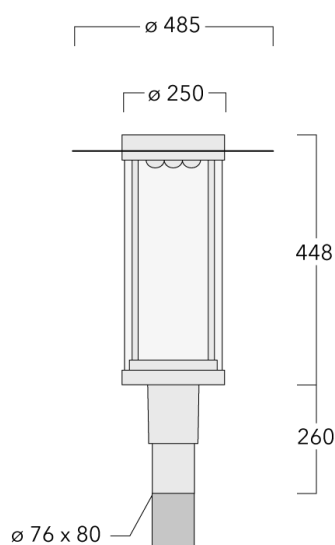


**Description**

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. PMMA main lens. Integral EC electronic converter in thermally separated compartment. DALI. CAD-optimised OLC® One LED Concept optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available. To be specified at time of ordering

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	PMMA
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE+Primer
Windage	0.205 m ²

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	In-pole surge protection SP10 device supplied. Please refer to WE-EF installation instructions for details. Use suffix +A for Integral surge protection.



Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Options

Light distribution	Colour temperature	Nominal Watt
 rectangular, side throw [R65]	 2700 K	15 W
 asymmetric, side throw [S65]	 3000 K	
	 4000 K	


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, side throw [S65] 	115-1772	LED-18/36W / 700 mA - 2700 K	3821.6	41 W	80	10.60
	115-1773	LED-18/36W / 700 mA - 3000 K	4104.7	41 W	80	10.60
	115-1774	LED-18/36W / 700 mA - 4000 K	4387.7	41 W	80	10.60
	115-1775	LED-18/54W / 1050 mA - 2700 K	5803.1	59 W	80	10.60
	115-1776	LED-18/54W / 1050 mA - 3000 K	6086.2	59 W	80	10.60
	115-1777	LED-18/54W / 1050 mA - 4000 K	6369.3	59 W	80	10.60
rectangular, side throw [R65] 	115-1766	LED-18/36W / 700 mA - 2700 K	4058.7	41 W	80	10.60
	115-1767	LED-18/36W / 700 mA - 3000 K	4359.3	41 W	80	10.60
	115-1768	LED-18/36W / 700 mA - 4000 K	4660	41 W	80	10.60
	115-1769	LED-18/54W / 1050 mA - 2700 K	6163.2	59 W	80	10.60
	115-1770	LED-18/54W / 1050 mA - 3000 K	6463.9	59 W	80	10.60
	115-1771	LED-18/54W / 1050 mA - 4000 K	6764.5	59 W	80	10.60

Mounting Accessories

Wall and pole brackets RZ

Description	Part ID	C1	D1	D2	D × L1	M1	Weight (kg)
RZ0-400 Wall bracket, single	115-1324	277	231	195	76 x 80	12	3.50

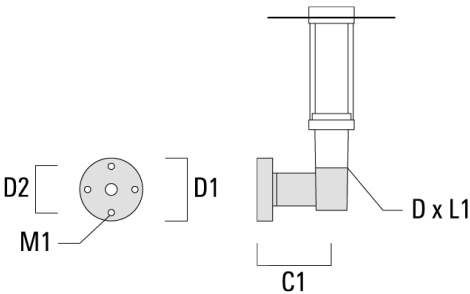

RZ2-400 Pole bracket, double	115-1323	258			76 x 100		4.90
------------------------------	----------	-----	--	--	----------	--	------

