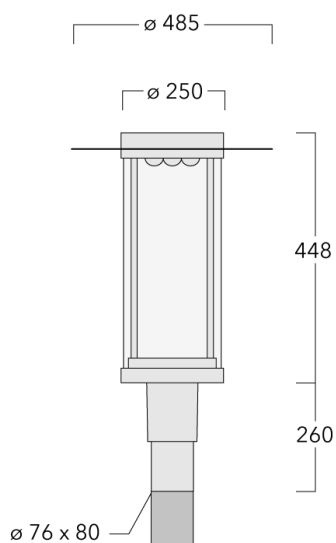


**Description**

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. PMMA main lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral electronic converter with DALI interface in thermally separated compartment. CAD-optimised indirect optics for superior illumination and glare control. Factory installed LED circuit board. Optional 2200 K version available. To be specified at time of ordering.

Including 0.5 m cable with a cable connector.

Specifications**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	PMMA
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.205 m ²

Electrical description

Driver / Ballast	Integral electronic converter with DALI interface in thermally separated compartment
Power factor	> 0.9



Additional information

Lifetime	Ta=25° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare

Options

Light distribution	Colour temperature	Nominal Watt
 rectangular, side throw [R65]	 2700 K	15 W
 asymmetric, side throw [S65]	 3000 K	
	 4000 K	


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, side throw [S65] 	115-1772	LED-18/36W / 700 mA - 2700 K	3821.6	41 W	80	10.60
	115-1773	LED-18/36W / 700 mA - 3000 K	4104.7	41 W	80	10.60
	115-1774	LED-18/36W / 700 mA - 4000 K	4387.7	41 W	80	10.60
	115-1775	LED-18/54W / 1050 mA - 2700 K	5803.1	59 W	80	10.60
	115-1776	LED-18/54W / 1050 mA - 3000 K	6086.2	59 W	80	10.60
	115-1777	LED-18/54W / 1050 mA - 4000 K	6369.3	59 W	80	10.60
rectangular, side throw [R65] 	115-1766	LED-18/36W / 700 mA - 2700 K	4058.7	41 W	80	10.60
	115-1767	LED-18/36W / 700 mA - 3000 K	4359.3	41 W	80	10.60
	115-1768	LED-18/36W / 700 mA - 4000 K	4660	41 W	80	10.60
	115-1769	LED-18/54W / 1050 mA - 2700 K	6163.2	59 W	80	10.60
	115-1770	LED-18/54W / 1050 mA - 3000 K	6463.9	59 W	80	10.60
	115-1771	LED-18/54W / 1050 mA - 4000 K	6764.5	59 W	80	10.60

Mounting Accessories

Wall and pole brackets RZ

Description	Part ID	C1	D1	D2	D × L1	M1	Weight (kg)
Wall bracket RZ0-400, single	115-1324	277	231	195	76 x 80	12	3.50

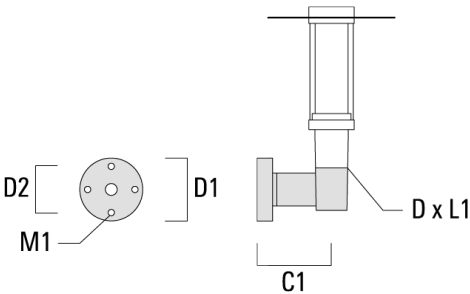

Pole bracket RZ2-400, double	115-1323	258			76 x 100		4.90
------------------------------	----------	-----	--	--	----------	--	------

