**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral driver, thermally separated. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

True Amber upon request.

Maximum one internal optical accessory possible, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div> <div></div> RAL9004 Black </div> <div> <div></div> RAL9007 Grey Metallic </div> <div> <div></div> RAL9016 White </div> <div> <div></div> RAL8019 Dark Bronze </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.194 ft²

Electrical description

Power supply	Integral [ECG] LED driver in 120-277V
Driver / Ballast	Integral 0-10V LED Driver
Power factor	> 0.9

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.








FLC210 LED

Floodlights






Options







Light distribution

	symmetric, wide beam [W]
	symmetric, medium beam [M]
	symmetric, narrow beam [N]
	symmetric, very narrow beam [VN]
	symmetric, very narrow beam, 'sharp cut-off' [VNS]
	linear spread, very narrow beam [VN]
	linear spread, very narrow beam, 'sharp cut-off'

Color temperature Nominal Watt

	2700 K	0 W
	3000 K	
	4000 K	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	139-2398+139-2404	LED-3/12W / 350 mA - 3000 K	1170.7	13.9 W	80	4.40
	139-2399+139-2404	LED-3/12W / 350 mA - 4000 K	1266.3	13.9 W	80	4.40
	139-2400+139-2404	LED-3/12W / 350 mA - 2700 K	1170.7	13.9 W	80	4.40
linear spread, very narrow beam, 'sharp cut-off' 	139-2401+139-2404	LED-3/12W / 350 mA - 3000 K	1060.5	13.9 W	80	4.40
	139-2402+139-2404	LED-3/12W / 350 mA - 4000 K	1142.1	13.9 W	80	4.40
	139-2403+139-2404	LED-3/12W / 350 mA - 2700 K	1060.5	13.9 W	80	4.40
symmetric, medium beam [M] 	139-2392	LED-3/12W / 350 mA - 3000 K	1289.4	13.9 W	80	4.40
	139-2393	LED-3/12W / 350 mA - 4000 K	1394.6	13.9 W	80	4.40
	139-2394	LED-3/12W / 350 mA - 2700 K	1289.4	13.9 W	80	4.40
symmetric, narrow beam [N] 	139-2395	LED-3/12W / 350 mA - 3000 K	1187.1	13.9 W	80	4.40
	139-2396	LED-3/12W / 350 mA - 4000 K	1284	13.9 W	80	4.40
	139-2397	LED-3/12W / 350 mA - 2700 K	1187.1	13.9 W	80	4.40
symmetric, very narrow beam [VN] 	139-2398	LED-3/12W / 350 mA - 3000 K	1306.4	13.9 W	80	4.40
	139-2399	LED-3/12W / 350 mA - 4000 K	1413	13.9 W	80	4.40
	139-2400	LED-3/12W / 350 mA - 2700 K	1306.4	13.9 W	80	4.40
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	139-2387+139-2404	LED-3/9W / 250 mA - 4000 K	850.8	11 W	80	4.40
	139-2401	LED-3/12W / 350 mA - 3000 K	1184.4	13.9 W	80	4.40
	139-2402	LED-3/12W / 350 mA - 4000 K	1275.6	13.9 W	80	4.40
	139-2403	LED-3/12W / 350 mA - 2700 K	1184.4	13.9 W	80	4.40
symmetric, wide beam [W]	139-2389	LED-3/12W / 350 mA - 3000 K	1212.4	13.9 W	80	4.40
	139-2390	LED-3/12W / 350 mA - 4000 K	1311.4	13.9 W	80	4.40
	139-2391	LED-3/12W / 350 mA - 2700 K	1212.4	13.9 W	80	4.40

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

FLC210 LED
Floodlights




Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
						

Mounting Accessories


Pole clamp TS

Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø 3"-3.5")	147-0543	3.0-3.50	3.31	76-89

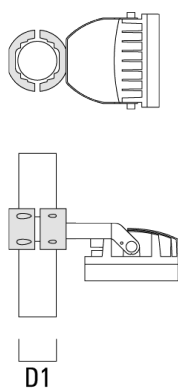


Junction box

Description	Part ID	Additional information	A	B	C1	Weight (lb)
Junction box JB20 - Cable side entries	310-9013	Junction boxes are made from marine-grade, die-cast aluminium alloy. IK10. IP66. For side entries and suitable to be used with cable glands.	7.09	5.63	2.01	2.25

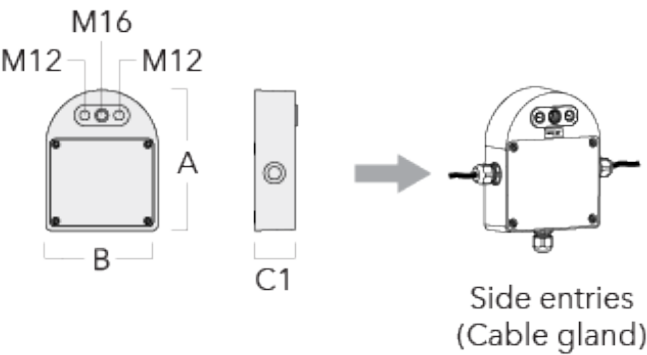


Junction box JB20 - Conduit side entries	310-9014	Junction boxes are made from marine-grade, die-cast aluminium alloy. IK10. IP66. For side entries and suitable to be used with conduits.	7.09	5.63	2.01	2.25
--	----------	--	------	------	------	------

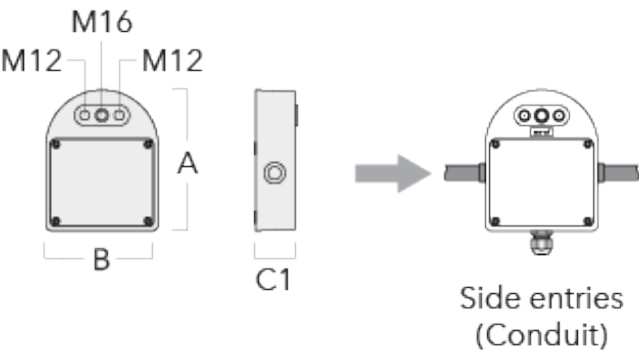


Pole clamp PC


Description	Part ID	D1	Weight (lb)
PC2 76-89/60 Pole clamp, double (Ø 3"-3.5")	139-2703	3.0-3.50	2.20

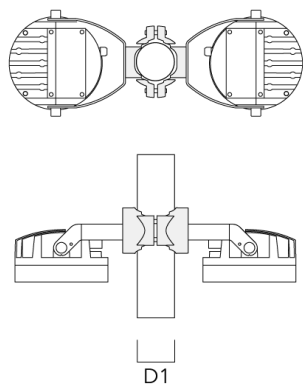


PC1 76-89/60 Pole clamp, single (Ø 3"-3.5")	139-2702	3.0-3.50	2.20
---	----------	----------	------

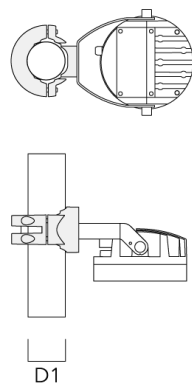

Description	Part ID	D1	Weight (lb)
PC2 102-114/60 Pole clamp, double (Ø 4"-4.5")	139-2707	4.0-4.50	2.65

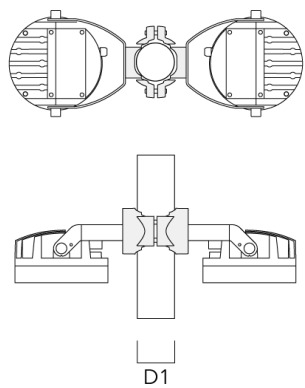


PC1 102-114/60 Pole clamp, single (Ø 4"-4,5")	139-2706	4.0-4.50	2.65
--	----------	----------	------

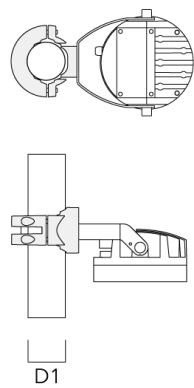


FLC210 LED
Floodlights


Description	Part ID	D1	Weight (lb)
PC2 114-133/60 Pole clamp, double (Ø 4.5"-5.25")	139-2709	4.5-5.25	3.10

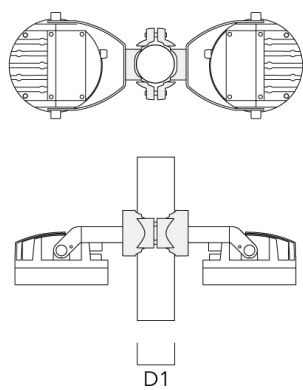


PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")	139-2708	4.5-5.25	3.10
---	----------	----------	------

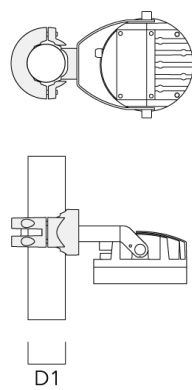

Description	Part ID	D1	Weight (lb)
PC2 82-109/60 Pole clamp, double (Ø 3.25"-4.25")	139-2705	3.20-4.30	2.40

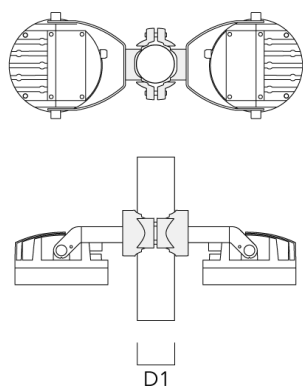

PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3")	139-2704	3.20-4.30	2.40
--	----------	-----------	------

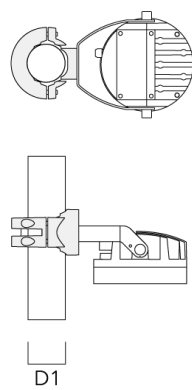

Optical Accessories

Linear spread lens

Description	Part ID	C1
IO-180-FLC210-LED	139-2404	3.94




FLC210 LED

Floodlights



Honeycomb louvre

Description	Part ID	C1
IW-FLC210-LED	139-2405	3.94



Glare shield

Description	Part ID	A	C1
ES-FLC210-LED	139-2406	3.39	5.87

FLC210 LED

Floodlights



Snoot

Description	Part ID	A	C1
ET-FLC210-LED	139-2407	3.39	5.87

