





Description

IP66. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features anodised aluminium core. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate main lens, UV-stabilised. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Available in 2200 K on request

Bollards and pathway luminaires**Specifications****Material description**

Body	Marine-grade, all-aluminium construction. Pole section features anodised aluminium core
Lens	Polycarbonate, UV-stabilised
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer

Electrical description

Driver / Ballast	Integral EC electronic converter
Surge protection	10/10kV

Additional information

Lifetime	11W - Ta=25° L70B50>50000h 15W - Ta=25° L70B50>60000h
----------	--

MRY224 LED

Bollards and pathway luminaires

Options

Light distribution



symmetric [C70]



asymmetric, side throw [S60]

Colour temperature



2700 K



3000 K





4000 K

Nominal Watt

0 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, side throw [S60] 	115-9801	LED-11W / 300 mA - 2700 K	843.6	13.5 W	80	10.80
	115-9802	LED-11W / 300 mA - 3000 K	889.5	13.5 W	80	10.80
	115-9803	LED-11W / 300 mA - 4000 K	946.9	13.5 W	80	10.80
	115-9805	LED-15W / 750 mA - 2700 K	1166.3	18 W	80	10.80
	115-9806	LED-15W / 750 mA - 3000 K	1180.9	18 W	80	10.80
	115-9807	LED-15W / 750 mA - 4000 K	1261.3	18 W	80	10.80
	symmetric [C70] 	115-9771	LED-11W / 300 mA - 2700 K	844.7	13.5 W	80
115-9772		LED-11W / 300 mA - 3000 K	890.7	13.5 W	80	10.80
115-9773		LED-11W / 300 mA - 4000 K	948.1	13.5 W	80	10.80
115-9775		LED-15W / 750 mA - 2700 K	1167.8	18 W	80	10.80
115-9776		LED-15W / 750 mA - 3000 K	1182.5	18 W	80	10.80
115-9777		LED-15W / 750 mA - 4000 K	1262.9	18 W	80	10.80

MRY224 LED

Bollards and pathway luminaires

Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

DALI interface

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/10/2024

Bollards and pathway luminaires

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90

Dali 2.0

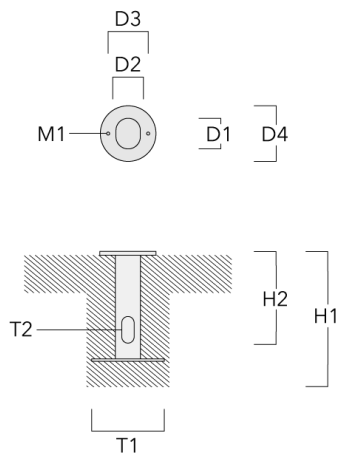
- Application controllers and Input devices defined
- Single-masters and multi-masters allowed
- Event priorities defined
- Separate addressing & grouping from control gear

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	Weight (kg)
Planted root ESZ4	300-9090	55	45	70	100	400	350	3.50



MRY224 LED

Bollards and pathway luminaires

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria

Phone: +61 3 8587 0444

Fax: +61 3 8587 0499

info.australia@we-ef.com

<https://we-ef.com/aus>

Subject to technical changes and errors.

Generated on 23/10/2024