

### Description

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system.

Gobo size T. Gobo outside diameter 46,6 mm, max. printable area  $d = 38$  mm.

IP66, Class I. IK05. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral driver, thermally separated. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

## Floodlights

---

### Specifications

#### Material description

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK05
Corrosion resistance	5CE

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V
Driver / Ballast	Integral 0-10V LED Driver
Power factor	> 0.9

---

#### Additional information

---

Listings	Contact WE-EF USA for ETI/UL Certification status.
----------	--

---

## Floodlights

---

### Options

#### Light distribution



symmetric Gobo-Projector [GP] - min aperture angle



symmetric Gobo-Projector [GP] - max aperture angle

#### Color temperature



2700 K



3000 K



4000 K

#### Nominal Watt

0 W

## Floodlights

### Configurations



Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric Gobo-Projector [GP] - max aperture angle 	139-2479_max	LED-FT-26W - 3000 K	1153.8	28 W	80	8.80
	139-2480_max	LED-FT-26W - 4000 K	1215.1	28 W	80	8.80
	139-2498_max	LED-FT-18W - 3000 K	840.4	20 W	80	8.80
	139-2499_max	LED-FT-18W - 4000 K	885.9	20 W	80	8.80
	139-2503_max	LED-FT-18W - 2700 K	812.4	20 W	80	8.80
	139-2506_max	LED-FT-26W - 2700 K	1117	28 W	80	8.80
symmetric Gobo-Projector [GP] - min aperture angle 	139-2479_min	LED-FT-26W - 3000 K	1105.4	28 W	80	8.80
	139-2480_min	LED-FT-26W - 4000 K	1164.1	28 W	80	8.80
	139-2498_min	LED-FT-18W - 3000 K	805.1	20 W	80	8.80
	139-2499_min	LED-FT-18W - 4000 K	848.7	20 W	80	8.80
	139-2503_min	LED-FT-18W - 2700 K	778.3	20 W	80	8.80
	139-2506_min	LED-FT-26W - 2700 K	1070.1	28 W	80	8.80

**Floodlights**



**Mounting Accessories**

**Pole clamp PC**

Description	Part ID	D1	Weight (lb)
PC1 76-89/60 Pole clamp, single (Ø 3"-3.5")	139-2702	3.0-3.50	2.20

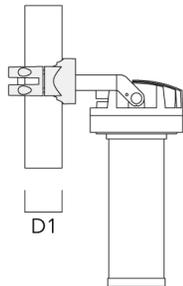


PC2 76-89/60 Pole clamp, double (Ø 3"-3.5")	139-2703	3.0-3.50	2.20
---	----------	----------	------

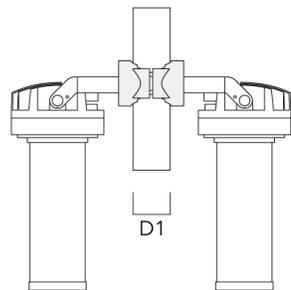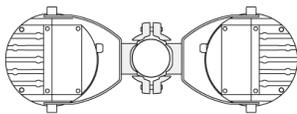


## Floodlights

Description	Part ID	D1	Weight (lb)
PC1 82-109/60 Pole clamp, single (Ø 3.25"-4.3")	139-2704	3.20-4.30	2.40

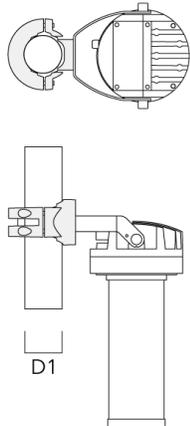

PC2 82-109/60 Pole clamp, double (Ø 3.25"-4.25")	139-2705	3.20-4.30	2.40
--	----------	-----------	------

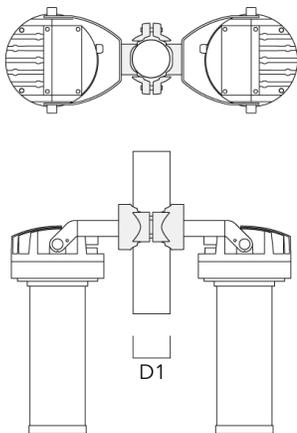

### WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 03/05/2026

## Floodlights

Description	Part ID	D1	Weight (lb)
PC1 102-114/60 Pole clamp, single (Ø 4"-4,5")	139-2706	4.0-4.50	2.65

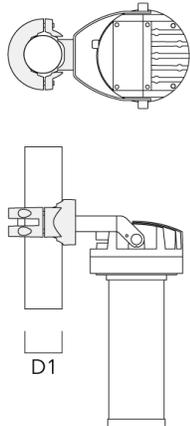


PC2 102-114/60 Pole clamp, double (Ø 4"-4.5")	139-2707	4.0-4.50	2.65
--	----------	----------	------

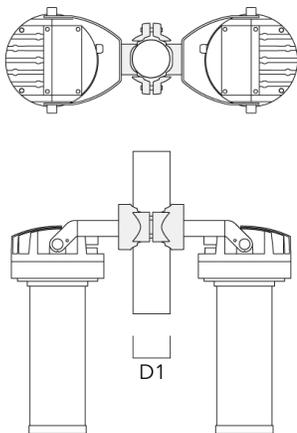


## Floodlights

Description	Part ID	D1	Weight (lb)
PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")	139-2708	4.5-5.25	3.10

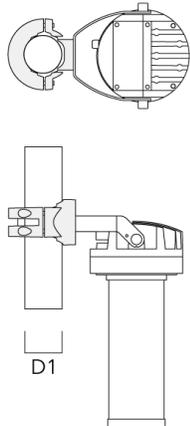

PC2 114-133/60 Pole clamp, double (Ø 4.5"-5.25")	139-2709	4.5-5.25	3.10
---	----------	----------	------

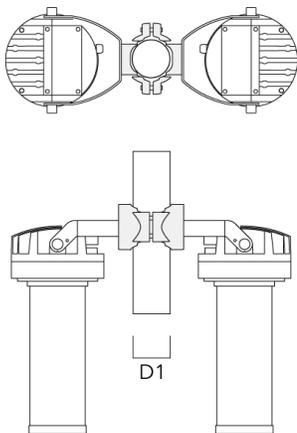

**Floodlights**

---

**Optical Accessories**

**Gobo cartridge**

---

Description	Part ID
Gobo cartridge for FLC210 [GP]	139-2858

---