

Description

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. CAD-optimized indirect optics for superior illumination and glare control. Integral driver in thermally separated compartment. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Pre-wired post complete with cable connecting box and service door for mains connection.

Suitable for installation in landscaped areas or on concrete foundations.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Bollards and Pathway Luminaires

Specifications**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

Additional information

Lifetime	Ta=25°/40° L70B50 > 50000h
----------	----------------------------

Options

Light distribution

Color temperature

Nominal Watt



symmetric distribution [C60]



3000 K

24 W

2 W



controlled symmetric distribution [C55]



4000 K

27 W





rectangular [R50]



2700 K

Bollards and Pathway Luminaires


Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
controlled symmetric distribution [C55] 	115-1908	LED-FT-12W (2700K)	1330.9	14 W	80	25.40
	115-1909	LED-FT 12W (3000K)	1421	14 W	80	25.40
	115-1910	LED-FT 12W (4000K)	1497.3	14 W	80	25.40
	115-1911	LED-FT-17W (2700K)	2034.5	20 W	80	25.40
	115-1912	LED-FT-17W (3000K)	2128.1	20 W	80	25.40
	115-1914	LED-FT-24W (2700K)	2807.4	27 W	80	25.40
	115-1915	LED-FT-24W (3000K)	2925.2	27 W	80	25.40
	115-1916	LED-FT-24W (4000K)	3050	27 W	80	25.40
	115-1936	LED-FT-17W (4000K)	2218.2	20 W	80	25.40
rectangular [R50] 	115-1920	LED-FT-12W (2700K)	1283.2	14 W	80	25.40
	115-1921	LED-FT 12W (3000K)	1370.1	14 W	80	25.40
	115-1922	LED-FT 12W (4000K)	1443.6	14 W	80	25.40
	115-1923	LED-FT-17W (2700K)	1961.6	20 W	80	25.40
	115-1924	LED-FT-17W (3000K)	2051.8	20 W	80	25.40
	115-1925	LED-FT-17W (4000K)	2138.7	20 W	80	25.40
	115-1926	LED-FT-24W (2700K)	2706.8	27 W	80	25.40
	115-1927	LED-FT-24W (3000K)	2820.4	27 W	80	25.40
	115-1928	LED-FT-24W (4000K)	2940.7	27 W	80	25.40
symmetric distribution [C60] 	115-1932	LED-FT-12W (2700K)	1107.8	14 W	80	25.35
	115-1933	LED-FT 12W (3000K)	1182.8	14 W	80	25.35
	115-1934	LED-FT 12W (4000K)	1246.2	14 W	80	25.35
	115-1935	LED-FT-17W (2700K)	1693.4	20 W	80	25.35
	115-1936	LED-FT-17W (3000K)	1771.3	20 W	80	25.35
	115-1936	LED-FT-17W (4000K)	1846.3	20 W	80	25.35
	115-1938	LED-FT-24W (2700K)	2336.7	27 W	80	25.35
	115-1939	LED-FT-24W (3000K)	2434.8	27 W	80	25.35
	115-1940	LED-FT-24W (4000K)	2538.6	27 W	80	25.40

Mounting Accessories

Planted root


Description	Part ID	D1	D2	D3	D4	H1	H2	M1	M2	Weight (lb)
Planted root ESV4	300-0464	8.66	7.48	4.25	4.02	15.75	13.78	.35	.24	9.48

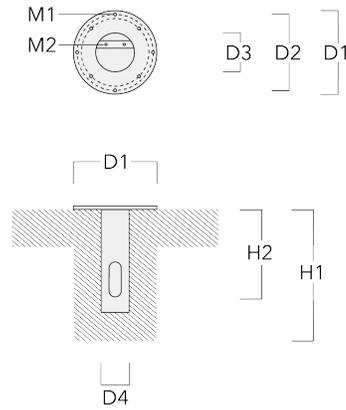

Optical Accessories

Light shield

Description	Part ID	Additional information	H1
LS180-[C60]	159-0321		120

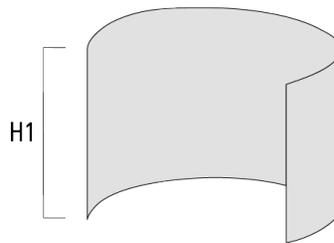

LS180	430-0029	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering.	
-------	----------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--