


# MRY224-TW LED - 850 mm

## Bollards and Pathway Luminaires

**we-ef**

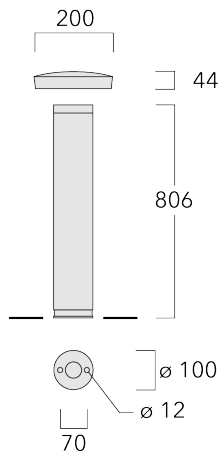

### Description

Tunable white. IP66. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features anodised aluminium core. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens, UV-stabilised. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. LED circuit board with Tunable White Technology. DALI Interface. For other control interface options to suit specific project requirements, contact WE-EF.

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/24/2025

# MRY224-TW LED - 850 mm



## Bollards and Pathway Luminaires

### Specifications

#### Material description

Body	Marine-grade, all-aluminium construction. Pole section features anodised aluminium core
Lens	Polycarbonate main lens, UV-stabilised
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

#### Electrical description

Driver / Ballast	Integral EC electronic converter
Surge protection	10/10kV

#### Additional information

Lifetime	Ta=25° L70B50>50000h
----------	----------------------

# MRY224-TW LED - 850 mm

Bollards and Pathway Luminaires

**we-ef**

## Options

Light distribution   Color temperature   Nominal Watt

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/24/2025

# MRY224-TW LED - 850 mm



Bollards and Pathway Luminaires

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
--------------------	---------	--------------	------------------	-------------------	-----	-------------

MRY224-TW LED - 850 mm



Bollards and Pathway Luminaires

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	Weight(lb)
Planted root ESZ4	300-9090	2.17	1.77	2.76	3.94	15.75	13.78	7.72 lbs

