


# DAS140-PM LED PENDANT MOUNT

## Ceiling Luminaires

**we-ef**

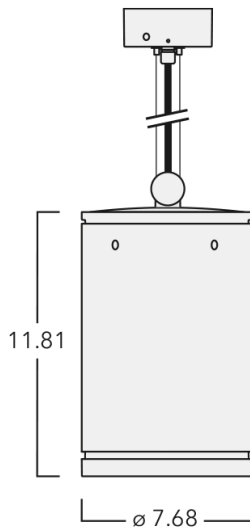

### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time at ordering. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024





# DAS140-PM LED PENDANT MOUNT

## Ceiling Luminaires

### Specifications

#### Material description

---

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

---

#### Electrical description

---

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	>0.9

---

#### Additional information

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# DAS140-PM LED PENDANT MOUNT

**we-ef**

## Ceiling Luminaires

### Options

#### Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]

#### Color temperature



2700 K



3000 K



4000 K

#### Nominal Watt

0 W

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>





Subject to technical changes and errors. - Generated on 11/23/2024

# DAS140-PM LED PENDANT MOUNT

**we-ef**

## Ceiling Luminaires

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	134-2309	LED-24/48W / 700 mA - 2700 K	4641.5	55 W	80	12.10
	134-2310	LED-24/48W / 700 mA - 3000 K	4899.6	55 W	80	12.10
	134-2311	LED-24/48W / 700 mA - 4000 K	4899.6	55 W	80	12.10
symmetric, very narrow beam [VN] 	134-2312	LED-24/48W / 700 mA - 2700 K	4786.7	55 W	80	12.10
	134-2313	LED-24/48W / 700 mA - 3000 K	5052.9	55 W	80	12.10
	134-2314	LED-24/48W / 700 mA - 4000 K	5052.9	55 W	80	12.10
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-2315	LED-24/48W / 700 mA - 2700 K	4992.4	55 W	80	5.50
	134-2316	LED-24/48W / 700 mA - 3000 K	5270	55 W	80	5.50
	134-2317	LED-24/48W / 700 mA - 4000 K	5270	55 W	80	5.50
symmetric, wide beam [W] 	134-2306	LED-24/48W / 700 mA - 2700 K	4242.4	55 W	80	12.10
	134-2307	LED-24/48W / 700 mA - 3000 K	4478.4	55 W	80	12.10
	134-2308	LED-24/48W / 700 mA - 4000 K	4478.4	55 W	80	12.10

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


# DAS140-PM LED PENDANT MOUNT

## Ceiling Luminaires

### Optical Accessories


#### Honeycomb louvre

Description	Part ID	Additional information	C1
IW-DAC120-LED	134-2002	Honeycomb louvre, matt black Teflon® coated. For luminaires equipped with [W] [M] light distribution. A maximum of one internal optical accessory. Internal component, factory installed.	4.05



---

IW-DA_140-LED	134-2066		
---------------	----------	--	--



---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# DAS140-PM LED PENDANT MOUNT


## Ceiling Luminaires

### Linear spread lens

---

Description	Part ID
IO-180-DAC140-LED	134-2064

---




---

### Wallwash lens

---

Description	Part ID
IO-20-WW-DAC140-LED	134-2065

---



---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# DAS140-PM LED PENDANT MOUNT

## Ceiling Luminaires


### Mounting Accessories

#### Adaptor for side conduit entry

---

Description	Part ID	A	C1
DA14 Adaptor for DAC140/DAS140-PM	134-2109	1.20	7.70

---



---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024