


DAS140-PM LED PENDANT MOUNT

Ceiling Luminaires

we-ef

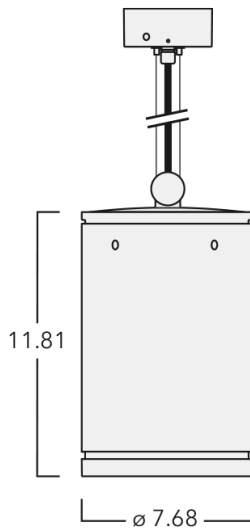

Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time at ordering. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/24/2025

DAS140-PM LED PENDANT MOUNT

we-ef

Ceiling Luminaires

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, all aluminium construction |
| Lens | Safety glass lens |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
| Power factor | >0.9 |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | Contact WE-EF USA for ETL/UL certification status. |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/24/2025

DAS140-PM LED PENDANT MOUNT



Ceiling Luminaires

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]

Color temperature



2700 K



3000 K



4000 K

Nominal Watt

0 W

WE-EF LIGHTING USA, LLC





410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 07/24/2025

DAS140-PM LED PENDANT MOUNT

we-ef

Ceiling Luminaires

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|---|----------|------------------------------|------------------|-------------------|-----|-------------|
| symmetric, medium beam [M]  | 134-2309 | LED-24/48W / 700 mA - 2700 K | 4641.5 | 55 W | 80 | 12.10 |
| | 134-2310 | LED-24/48W / 700 mA - 3000 K | 4899.6 | 55 W | 80 | 12.10 |
| | 134-2311 | LED-24/48W / 700 mA - 4000 K | 4899.6 | 55 W | 80 | 12.10 |
| symmetric, very narrow beam [VN]  | 134-2312 | LED-24/48W / 700 mA - 2700 K | 4786.7 | 55 W | 80 | 12.10 |
| | 134-2313 | LED-24/48W / 700 mA - 3000 K | 5052.9 | 55 W | 80 | 12.10 |
| | 134-2314 | LED-24/48W / 700 mA - 4000 K | 5052.9 | 55 W | 80 | 12.10 |
| symmetric, very narrow beam, 'sharp cut-off' [VNS]  | 134-2315 | LED-24/48W / 700 mA - 2700 K | 4992.4 | 55 W | 80 | 5.50 |
| | 134-2316 | LED-24/48W / 700 mA - 3000 K | 5270 | 55 W | 80 | 5.50 |
| | 134-2317 | LED-24/48W / 700 mA - 4000 K | 5270 | 55 W | 80 | 5.50 |
| symmetric, wide beam [W]  | 134-2306 | LED-24/48W / 700 mA - 2700 K | 4242.4 | 55 W | 80 | 12.10 |
| | 134-2307 | LED-24/48W / 700 mA - 3000 K | 4478.4 | 55 W | 80 | 12.10 |
| | 134-2308 | LED-24/48W / 700 mA - 4000 K | 4478.4 | 55 W | 80 | 12.10 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/24/2025

DAS140-PM LED PENDANT MOUNT




Ceiling Luminaires

Optical Accessories

Linear spread lens

| Description | Part ID |
|-------------------|----------|
| IO-180-DAC140-LED | 134-2064 |




DAS140-PM LED PENDANT MOUNT



Ceiling Luminaires


Wallwash lens

| Description | Part ID |
|---------------------|----------|
| IO-20-WW-DAC140-LED | 134-2065 |



Honeycomb louvre

| Description | Part ID |
|---------------|----------|
| IW-DA_140-LED | 134-2066 |



DAS140-PM LED PENDANT MOUNT



Ceiling Luminaires

Mounting Accessories

Adaptor for side conduit entry

| Description | Part ID | A | C1 |
|-----------------------------------|----------|------|------|
| DA14 Adaptor for DAC140/DAS140-PM | 134-2109 | 1.20 | 7.70 |

