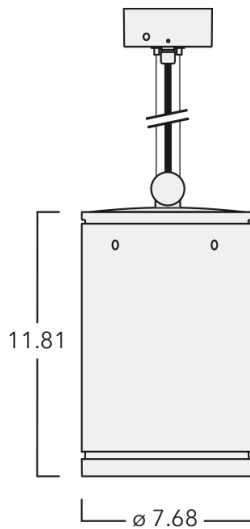


DAS140-PM LED PENDANT MOUNT

we-ef

Ceiling Luminaires



Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time at ordering. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030





customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 12/13/2025

Ceiling Luminaires

Specifications

Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	>0.9

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]

Color temperature



2700 K



3000 K



4000 K

Nominal Watt





0 W

DAS140-PM LED PENDANT MOUNT

we-ef

Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	134-2309	LED-24/48W / 700 mA - 2700 K	4641.5	55 W	80	12.10
	134-2310	LED-24/48W / 700 mA - 3000 K	4899.6	55 W	80	12.10
	134-2311	LED-24/48W / 700 mA - 4000 K	4899.6	55 W	80	12.10
	134-2312	LED-24/48W / 700 mA - 2700 K	4786.7	55 W	80	12.10
	134-2313	LED-24/48W / 700 mA - 3000 K	5052.9	55 W	80	12.10
	134-2314	LED-24/48W / 700 mA - 4000 K	5052.9	55 W	80	12.10
	134-2315	LED-24/48W / 700 mA - 2700 K	4992.4	55 W	80	5.50
	134-2316	LED-24/48W / 700 mA - 3000 K	5270	55 W	80	5.50
	134-2317	LED-24/48W / 700 mA - 4000 K	5270	55 W	80	5.50
	134-2306	LED-24/48W / 700 mA - 2700 K	4242.4	55 W	80	12.10
	134-2307	LED-24/48W / 700 mA - 3000 K	4478.4	55 W	80	12.10
	134-2308	LED-24/48W / 700 mA - 4000 K	4478.4	55 W	80	12.10

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 12/13/2025

Optical Accessories

Linear spread lens


Description	Part ID
IO-180-DAC140-LED	134-2064



Ceiling Luminaires


Wallwash lens

Description	Part ID
IO-20-WW-DAC140-LED	134-2065



Honeycomb louvre

Description	Part ID
IW-DA_140-LED	134-2066



Mounting Accessories

Adaptor for side conduit entry

Description	Part ID	A	C1
DA14 Adaptor for DAC140/DAS140-PM	134-2109	1.20	7.70

