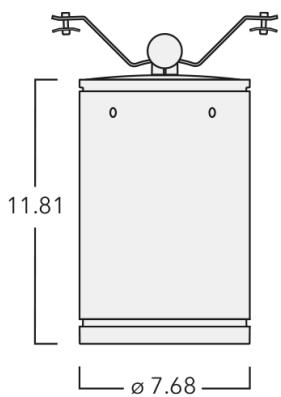


Catenary Luminaires**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable entry, second cable entry for through wiring with cable connector optional. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Tunable White technology. DALI interface. The luminaire is factory-sealed and does not need to be opened during installation.

Includes cable connector, for cable 0.08-0.47 inch. +/- 10° adjustable to compensate for sloping catenary systems.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Catenary Luminaires**Specifications****Material description**

Body	Marine-grade, die-cast aluminum alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.658 ft ²

Electrical description

Driver / Ballast	DALI
Power factor	> 0.9

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

Catenary Luminaires**Options****Light distribution****Color temperature****Nominal Watt**

symmetric, wide beam [W]



symmetric, medium beam [M]






symmetric, narrow beam [E]

2200-6000K


0 W

Catenary Luminaires**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	134-2289	LED-24/42W / 325 mA - 2200-6000K	4237.4	51 W	80	6.00
symmetric, narrow beam [E] 	134-2290	LED-24/42W / 325 mA - 2200-6000K	4406.3	51 W	80	6.00
symmetric, wide beam [W] 	134-2288	LED-24/42W / 325 mA - 2200-6000K	3993.5	51 W	80	6.00


Optical Accessories**Linear spread lens**

Description	Part ID
IO-180-DAC140-LED	134-2064




Catenary Luminaires**Wallwash lens**

Description	Part ID
IO-20-WW-DAC140-LED	134-2065



C1**Honeycomb louvre**

Description	Part ID
IW-DA_140-LED	134-2066



C1