


DAS140-PM TW LED PENDANT MOUNT TUNABLE WHITE

we-ef

Ceiling Luminaires

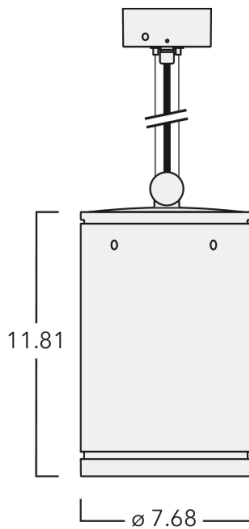

Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time at ordering. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Tunable White technology. DALI interface. The luminaire is factory-sealed and does not need to be opened during installation.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 09/07/2025

DAS140-PM TW LED PENDANT MOUNT TUNABLE WHITE



Ceiling Luminaires

Specifications

Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Driver / Ballast	DALI
------------------	------

Additional information




Listings	Contact WE-EF USA for ETL/UL certification status.
----------	--

DAS140-PM TW LED PENDANT MOUNT TUNABLE WHITE



Ceiling Luminaires

Options




Light distribution	Color temperature	Nominal Watt
 symmetric, medium beam [M]	2200-6000K	0 W
 symmetric, wide beam [W]		
 symmetric, narrow beam [E]		

DAS140-PM TW LED PENDANT MOUNT TUNABLE WHITE



Ceiling Luminaires

Configurations


Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	134-2319	LED-24/42W / 325 mA - 2200-6000K	4605.8	51 W	80	5.50
symmetric, narrow beam [E] 	134-2320	LED-24/42W / 325 mA - 2200-6000K	4789.4	51 W	80	5.50
symmetric, wide beam [W] 	134-2318	LED-24/42W / 325 mA - 2200-6000K	4340.7	51 W	80	5.50

Ceiling Luminaires

Optical Accessories

Linear spread lens


Description	Part ID
IO-180-DAC140-LED	134-2064



Ceiling Luminaires


Wallwash lens

Description	Part ID
IO-20-WW-DAC140-LED	134-2065



Honeycomb louvre

Description	Part ID
IW-DA_140-LED	134-2066



DAS140-PM TW LED PENDANT MOUNT TUNABLE WHITE



Ceiling Luminaires

Mounting Accessories

Adaptor for side conduit entry

Description	Part ID	A	C1
DA14 Adaptor for DAC140/DAS140-PM	134-2109	1.20	7.70

