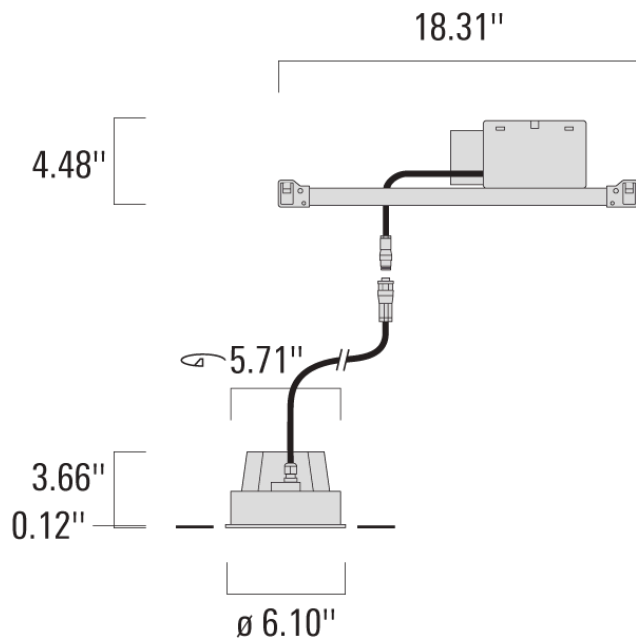


# DOC120 LED [New Construction]

## Ceiling Luminaires

**we-ef**



### Description

DOC120 LED for new construction. For remodel projects, see DOC120 LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025

# DOC120 LED [New Construction]

**we-ef**

## Ceiling Luminaires

### Specifications

#### Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

#### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

#### Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025





DOC120 LED [New Construction]

Ceiling Luminaires



Options

Light distribution





- symmetric, medium beam [M]
- symmetric, very narrow beam [VN]
- symmetric, very narrow beam, 'sharp cut-off' [VNS]
- symmetric, wide beam [W]

Color temperature

Nominal Watt

	4000 K	24 W
	3000 K	0 W


Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	134-6204	LED-12/24W / 700 mA - 3000 K	2542.8	28 W	80	5.07
	134-6205	LED-12/24W / 700 mA - 4000 K	2542.8	28 W	80	5.07
symmetric, very narrow beam [VN] 	134-6200	LED-12/24W / 700 mA - 3000 K	2445.3	28 W	80	5.07
	134-6201	LED-12/24W / 700 mA - 4000 K	2445.3	28 W	80	5.07
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6202	LED-12/24W / 700 mA - 3000 K	2610	28 W	80	5.07
	134-6203	LED-12/24W / 700 mA - 4000 K	2610	28 W	80	5.07
symmetric, wide beam [W] 	134-6206	LED-12/24W / 700 mA - 3000 K	2297.3	28 W	80	5.07
	134-6207	LED-12/24W / 700 mA - 4000 K	2297.3	28 W	80	5.07

Optical Accessories

Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC120-LED	134-1746	4.05




C1

DOC120 LED [New Construction]  
Ceiling Luminaires



Softening Lens

Description	Part ID	C1
IO-360-DOC120-LED	134-1747	4.05



Linear spread lens

Description	Part ID	C1
IO-180-DOC120-LED	134-1745	4.05

