


# DOC120-FT TW LED TUNABLE WHITE [New Construction]

**we-ef**

## Ceiling Luminaires

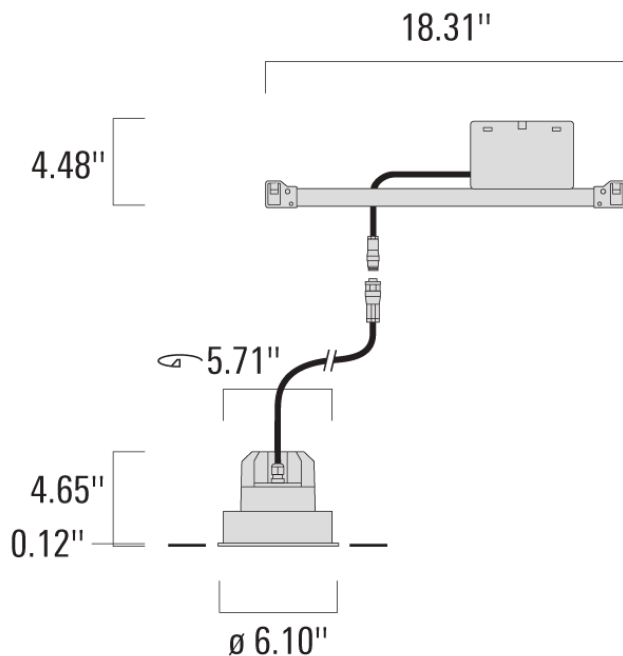

### Description

DOC120-FT TW LED for new construction. For remodel projects, see DOC120-FT TW LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware.

Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White technology. DMX Interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025

## Ceiling Luminaires

### Specifications

#### Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

#### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

#### Additional information

Lifetime	Ta=25°/40° L70B50 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>




Subject to technical changes and errors. - Generated on 08/15/2025

# DOC120-FT TW LED TUNABLE WHITE [New Construction]



## Ceiling Luminaires

### Options

Light distribution	Color temperature	Nominal Watt
 symmetric, wide beam [W]	2700-6000K	12 W
 symmetric, medium beam [M]		
 symmetric, narrow beam [E]		

### WE-EF LIGHTING USA, LLC




410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 08/15/2025

# DOC120-FT TW LED TUNABLE WHITE [New Construction]



## Ceiling Luminaires

### Configurations


Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	134-6263	LED-FT-17W / 500mA - 2700-6000 K	1107.7	20 W	80	4.96
symmetric, narrow beam [E] 	134-6264	LED-FT-17W / 500mA - 2700-6000 K	481.8	20 W	80	4.96
symmetric, wide beam [W] 	134-6262	LED-FT-17W / 500mA - 2700-6000 K	1091.8	20 W	80	4.96

Ceiling Luminaires

Optical Accessories

Linear spread lens


Description	Part ID	C1
IO-180-DOC120-LED-FT	134-1781	4.05



Ceiling Luminaires


Softening Lens

Description	Part ID	C1
IO-360-DOC120-LED-FT	134-1782	4.05



Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC120-LED-FT	134-1771	4.05



# DOC120-FT TW LED TUNABLE WHITE [New Construction]



## Ceiling Luminaires

### Control

#### DMX Booster Box

Description	Part ID
DMX Booster Box	400-0474



Ceiling Luminaires

DMX Combination Cable

Description	Part ID
DMX Combination Cable	400-0480



DMX Controller

Description	Part ID	Additional information
DMX Controller	400-0469	IP20. DIN Rail system. Is designed for either live or stand-alone control. It features one DMX universe, a USBconnection, 128k flash memory for storing stand-alone programs.

Ceiling Luminaires

DMX Controller (smart)

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to 36 scences; alternatively, via ....



DMX Plug and Socket

Description	Part ID
DMX Plug and Socket	400-0479



Ceiling Luminaires

DMX Termination Plug

Description	Part ID
DMX Termination Plug	400-0475

