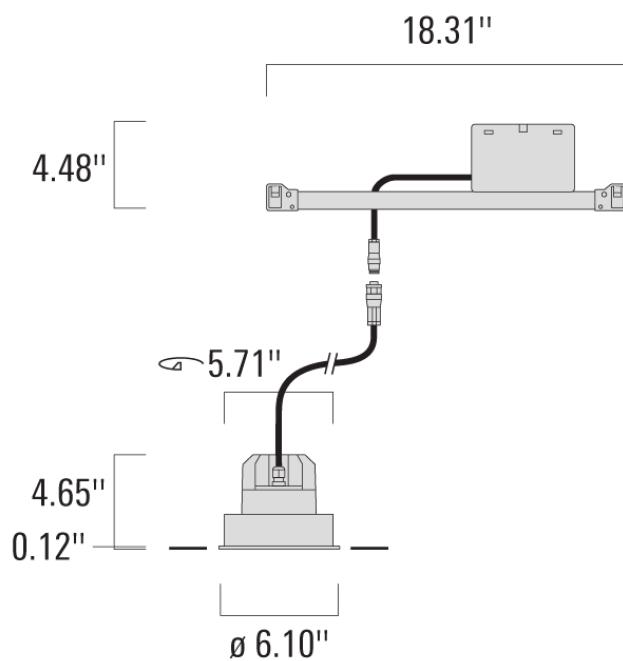


**Ceiling Luminaires****Description**

DOC120-FT TW LED for new construction. For remodel projects, see DOC120-FT TW LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware.

Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White technology. DMX Interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)  
+ XXX-XXXX (Accessory 1)

**Ceiling Luminaires****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

---

**Additional information**

---

Lifetime	Ta=25°/40° L70B50 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

**Ceiling Luminaires****Options****Light distribution****Color temperature****Nominal Watt**

symmetric, wide beam [W]

2700-6000K

12 W






symmetric, medium beam [M]



symmetric, narrow beam [E]


**Ceiling Luminaires****Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	134-6263	LED-FT-17W / 500mA - 2700-6000 K	1107.7	20 W	80	4.96
symmetric, narrow beam [E] 	134-6264	LED-FT-17W / 500mA - 2700-6000 K	481.8	20 W	80	4.96
symmetric, wide beam [W] 	134-6262	LED-FT-17W / 500mA - 2700-6000 K	1091.8	20 W	80	4.96

**Ceiling Luminaires****Optical Accessories****Linear spread lens**


---

Description	Part ID	C1
IO-180-DOC120-LED-FT	134-1781	4.05




**Ceiling Luminaires****Softening Lens**

Description	Part ID	C1
IO-360-DOC120-LED-FT	134-1782	4.05

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-DOC120-LED-FT	134-1771	4.05



**Ceiling Luminaires****Control****DMX Booster Box**

Description	Part ID
DMX Booster Box	400-0474



**Ceiling Luminaires****DMX Combination Cable**

Description	Part ID
DMX Combination Cable	400-0480

**DMX Controller**

Description	Part ID	Additional information
DMX Controller	400-0469	IP20. DIN Rail system. Is designed for either live or stand-alone control. It features one DMX universe, a USB connection, 128k flash memory for storing stand-alone programs.

**Ceiling Luminaires****DMX Controller (smart)**

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to 36 scences; alternatively, via ....



**Ceiling Luminaires****DMX Plug and Socket**

---

Description	Part ID
DMX Plug and Socket	400-0479

**DMX Termination Plug**

---

Description	Part ID
DMX Termination Plug	400-0475

