

Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.




Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

6-12W / 120-277V / 0-10V Dimming.

Including 1.3 ft of flexible cable enclosed in a stainless conduit, in-line connector and mounting clamp for installation to RAIL66 mounting system.

Optical accessories are factory-installed. To be specified at time of ordering.

Specifications**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.484 ft ²

Electrical description

Driver / Ballast	Integral [ECG] electronic driver 120V-277V
------------------	--

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

RAIL66

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam [VN]



linear spread, very narrow beam, 'sharp cut-off'



wallwash

Color temperature



2700 K



3000 K







4000 K

Nominal Watt

0 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	145-7726+145-7781	LED-3/6W / 180 mA - 2700 K	539.2	7.5 W	80	2.10
	145-7727+145-7781	LED-3/9W / 250 mA - 2700 K	756.9	11 W	80	2.10
	145-7728+145-7781	LED-3/12W / 350 mA - 2700 K	1016.1	13.9 W	80	2.10
	145-7729+145-7781	LED-3/6W / 180 mA - 3000 K	539.2	7.5 W	80	2.10
	145-7730+145-7781	LED-3/9W / 250 mA - 3000 K	756.9	11 W	80	2.10
	145-7731+145-7781	LED-3/12W / 350 mA - 3000 K	1016.1	13.9 W	80	2.10
	145-7732+145-7781	LED-3/6W / 180 mA - 4000 K	580.6	7.5 W	80	2.10
	145-7733+145-7781	LED-3/9W / 250 mA - 4000 K	808.7	11 W	80	2.10
	145-7734+145-7781	LED-3/12W / 350 mA - 4000 K	1099.1	13.9 W	80	2.10
linear spread, very narrow beam, 'sharp cut-off' 	145-7735+145-7781	LED-3/6W / 180 mA - 2700 K	528.4	7.5 W	80	2.10
	145-7736+145-7781	LED-3/9W / 250 mA - 2700 K	748.5	11 W	80	2.10
	145-7737+145-7781	LED-3/12W / 350 mA - 2700 K	1001.7	13.9 W	80	2.10
	145-7738+145-7781	LED-3/6W / 180 mA - 3000 K	528.4	7.5 W	80	2.10
	145-7739+145-7781	LED-3/9W / 250 mA - 3000 K	748.5	11 W	80	2.10
	145-7740+145-7781	LED-3/12W / 350 mA - 3000 K	1001.7	13.9 W	80	2.10
	145-7741+145-7781	LED-3/6W / 180 mA - 4000 K	572.4	7.5 W	80	2.10
	145-7742+145-7781	LED-3/9W / 250 mA - 4000 K	803.6	11 W	80	2.10
	145-7743+145-7781	LED-3/12W / 350 mA - 4000 K	1078.8	13.9 W	80	2.10
symmetric, medium beam [M] 	145-7717	LED-3/6W / 180 mA - 2700 K	600.4	7.5 W	80	2.10
	145-7718	LED-3/9W / 250 mA - 2700 K	842.9	11 W	80	2.10
	145-7719	LED-3/12W / 350 mA - 2700 K	1131.6	13.9 W	80	2.10
	145-7720	LED-3/6W / 180 mA - 3000 K	600.4	7.5 W	80	2.10
	145-7721	LED-3/9W / 250 mA - 3000 K	842.9	11 W	80	2.10
	145-7722	LED-3/12W / 350 mA - 3000 K	1131.6	13.9 W	80	2.10
	145-7723	LED-3/6W / 180 mA - 4000 K	646.6	7.5 W	80	2.10
	145-7724	LED-3/9W / 250 mA - 4000 K	900.6	11 W	80	2.10
	145-7725	LED-3/12W / 350 mA - 4000 K	1224	13.9 W	80	2.10
symmetric, very narrow beam [VN] 	145-7726	LED-3/6W / 180 mA - 2700 K	605.2	7.5 W	80	2.10
	145-7727	LED-3/9W / 250 mA - 2700 K	849.6	11 W	80	2.10
	145-7728	LED-3/12W / 350 mA - 2700 K	1140.5	13.9 W	80	2.10
	145-7729	LED-3/6W / 180 mA - 3000 K	605.2	7.5 W	80	2.10
	145-7730	LED-3/9W / 250 mA - 3000 K	849.6	11 W	80	2.10




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

RAIL66

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	145-7731	LED-3/12W / 350 mA - 3000 K	1140.5	13.9 W	80	2.10
	145-7732	LED-3/6W / 180 mA - 4000 K	651.7	7.5 W	80	2.10
	145-7733	LED-3/9W / 250 mA - 4000 K	907.8	11 W	80	2.10
	145-7734	LED-3/12W / 350 mA - 4000 K	1233.6	13.9 W	80	2.10
	145-7735	LED-3/6W / 180 mA - 2700 K	606.3	7.5 W	80	2.10
	145-7736	LED-3/9W / 250 mA - 2700 K	858.9	11 W	80	2.10
	145-7737	LED-3/12W / 350 mA - 2700 K	1149.4	13.9 W	80	2.10
	145-7738	LED-3/6W / 180 mA - 3000 K	606.3	7.5 W	80	2.10
	145-7739	LED-3/9W / 250 mA - 3000 K	858.9	11 W	80	2.10
	145-7740	LED-3/12W / 350 mA - 3000 K	1149.4	13.9 W	80	2.10
	145-7741	LED-3/6W / 180 mA - 4000 K	656.8	7.5 W	80	2.10
	145-7742	LED-3/9W / 250 mA - 4000 K	922	11 W	80	2.10
	145-7743	LED-3/12W / 350 mA - 4000 K	1237.8	13.9 W	80	2.10
symmetric, wide beam [W] 	145-7708	LED-3/6W / 180 mA - 2700 K	595.4	7.5 W	80	2.10
	145-7709	LED-3/9W / 250 mA - 2700 K	835.8	11 W	80	2.10
	145-7710	LED-3/12W / 350 mA - 2700 K	1122.1	13.9 W	80	2.10
	145-7711	LED-3/6W / 180 mA - 3000 K	595.4	7.5 W	80	2.10
	145-7712	LED-3/9W / 250 mA - 3000 K	835.8	11 W	80	2.10
	145-7713	LED-3/12W / 350 mA - 3000 K	1122.1	13.9 W	80	2.10
	145-7714	LED-3/6W / 180 mA - 4000 K	641.2	7.5 W	80	2.10
	145-7715	LED-3/9W / 250 mA - 4000 K	893.1	11 W	80	2.10
	145-7716	LED-3/12W / 350 mA - 4000 K	1213.7	13.9 W	80	2.10
wallwash 	145-7717+145-7782	LED-3/6W / 180 mA - 2700 K	408.7	7.5 W	80	2.10
	145-7718+145-7782	LED-3/9W / 250 mA - 2700 K	573.7	11 W	80	2.10
	145-7719+145-7782	LED-3/12W / 350 mA - 2700 K	770.2	13.9 W	80	2.10
	145-7720+145-7782	LED-3/6W / 180 mA - 3000 K	408.7	7.5 W	80	2.10
	145-7721+145-7782	LED-3/9W / 250 mA - 3000 K	573.7	11 W	80	2.10
	145-7722+145-7782	LED-3/12W / 350 mA - 3000 K	770.2	13.9 W	80	2.10
	145-7723+145-7782	LED-3/6W / 180 mA - 4000 K	440.1	7.5 W	80	2.10
	145-7724+145-7782	LED-3/9W / 250 mA - 4000 K	613	11 W	80	2.10
	145-7725+145-7782	LED-3/12W / 350 mA - 4000 K	833.1	13.9 W	80	2.10

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


Mounting Accessories

Universal

Description	Part ID	C1	C2	H1	M1	Weight (lb)	L1	L2
2 Mains outlets (L=45.28)	310-9200	3.00	1.20	7.90	0.5	13.00	45.28	41.14

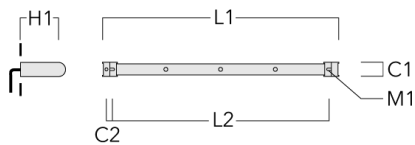


3 Mains outlets (L=45.28)	310-9202	3.00	1.20	7.90	0.5	13.00	45.28	41.14
---------------------------	----------	------	------	------	-----	-------	-------	-------

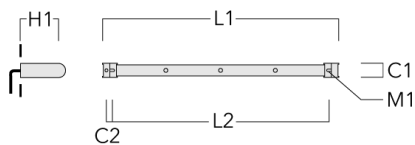


RAIL66

Description	Part ID	C1	C2	H1	M1	Weight (lb)	L1	L2
3 Mains outlets (L=64.69)	310-9210	3.00	1.18	7.90	0.5	15.90	64.69	60.83

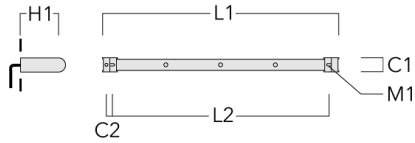

4 Mains outlets (L=64.69)	310-9212	3.00	1.18	7.90	5	13.00 lbs	64.69	60.83
---------------------------	----------	------	------	------	---	-----------	-------	-------

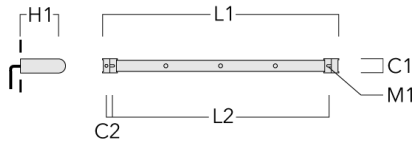


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
 customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

RAIL66

Description	Part ID	C1	C2	H1	M1	Weight (lb)	L1	L2
4 Mains outlets (L=84.65)	310-9220	3.00	1.18	7.90	0.5	18.76	84.65	80.51

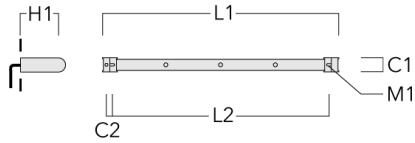

6 Mains outlets (L=84.65)	310-9222	3.00	1.18	7.90	0.5	18.76	84.65	80.51
---------------------------	----------	------	------	------	-----	-------	-------	-------

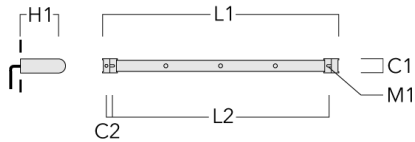


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
 customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Flat Surface Fitters

Description	Part ID	C1	C2	D1	D2	L	M1	Weight (lb)
Surface fitters (pair)	310-9290	0.79	1.18	7.1	5.5	42.1	.35	3.70

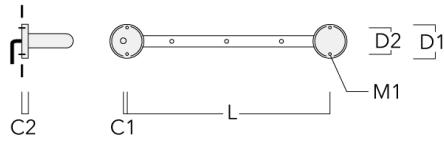

Column Fitters

Description	Part ID	C1	C2	L	M1	Weight (lb)
Column Fitters (pair)	310-9294	1.20	4.00	43.9	.5	2.00

