


FLC321 Surface mounted Floodlights

we-ef

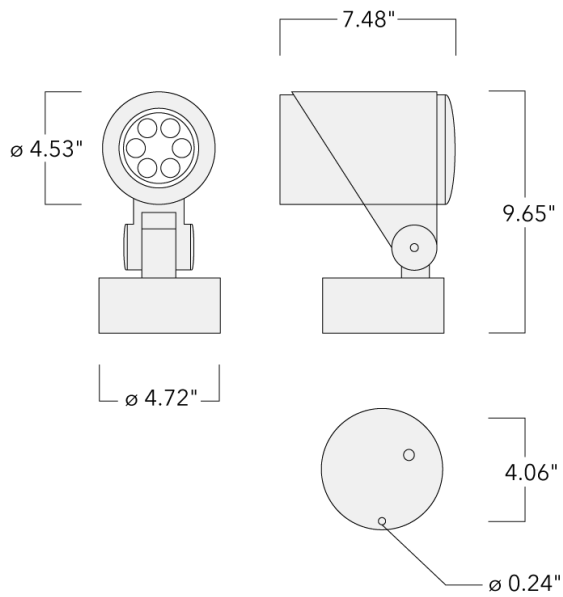

Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. One cable entry.

Optical accessories are factory-installed. To be specified at time of ordering.

12W, 18W, 26W / 120-277V / 0-10V Dimming.
12W, 18W / 24V DC / 0-10V Dimming. (available upon request)

Contact the factory for 277V or 347V options.





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

Floodlights

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.484 ft ²

Electrical description

Power supply	120-277V AC/50-60 Hz (24VDC available upon request)
Driver / Ballast	120-277V AC/50-60 Hz (24VDC available upon request)
Power factor	>0.9

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted Floodlights

we-ef

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam [VN]



linear spread, very narrow beam, 'sharp cut-off'



wallwash

Color temperature



2700 K



3000 K



4000 K

Nominal Watt

0 W





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Floodlights

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	145-7338+145-9991	LED-6/26W / 1400 mA - 2700K	2027.2	29 W	80	6.80
	145-7339+145-9991	LED-6/26W / 1400 mA - 3000K	2144.1	29 W	80	6.80
	145-7340+145-9991	LED-6/26W / 1400 mA - 4000K	2241.6	29 W	80	6.80
	145-9979+145-9991	LED-6/12W / 700 mA - 2700 K	1096	14.5 W	80	5.70
	145-9980+145-9991	LED-6/18W / 1050 mA - 2700 K	1522.2	21 W	80	6.80
	145-9981+145-9991	LED-6/12W / 700 mA - 3000 K	1177.2	14.5 W	80	5.70
	145-9982+145-9991	LED-6/18W / 1050 mA - 3000 K	1644	21 W	80	6.80
	145-9983+145-9991	LED-6/12W / 700 mA - 4000 K	1258.4	14.5 W	80	5.70
	145-9984+145-9991	LED-6/18W / 1050 mA - 4000 K	1745.5	21 W	80	6.80
linear spread, very narrow beam, 'sharp cut-off' 	145-7341+145-9991	LED-6/26W / 1400 mA - 2700K	2158.4	29 W	80	6.80
	145-7342+145-9991	LED-6/26W / 1400 mA - 3000K	2282.9	29 W	80	6.80
	145-7343+145-9991	LED-6/26W / 1400 mA - 4000K	2386.7	29 W	80	6.80
	145-9985+145-9991	LED-6/12W / 700 mA - 2700 K	1125.5	14.5 W	80	5.70
	145-9986+145-9991	LED-6/18W / 1050 mA - 2700 K	1563.1	21 W	80	6.80
	145-9987+145-9991	LED-6/12W / 700 mA - 3000 K	1208.8	14.5 W	80	5.70
	145-9988+145-9991	LED-6/18W / 1050 mA - 3000 K	1688.2	21 W	80	6.80
	145-9989+145-9991	LED-6/12W / 700 mA - 4000 K	1292.2	14.5 W	80	5.70
	145-9990+145-9991	LED-6/18W / 1050 mA - 4000 K	1792.4	21 W	80	6.80
symmetric, medium beam [M] 	145-7335	LED-6/26W / 1400 mA - 2700K	2179.3	29 W	80	6.80
	145-7336	LED-6/26W / 1400 mA - 3000K	2305	29 W	80	6.80
	145-7337	LED-6/26W / 1400 mA - 4000K	2409.8	29 W	80	6.80
	145-9973	LED-6/12W / 700 mA - 2700 K	1162.6	14.5 W	80	6.80
	145-9974	LED-6/18W / 1050 mA - 2700 K	1614.8	21 W	80	6.80
	145-9975	LED-6/12W / 700 mA - 3000 K	1248.7	14.5 W	80	6.80
	145-9976	LED-6/18W / 1050 mA - 3000 K	1743.9	21 W	80	6.80
	145-9977	LED-6/12W / 700 mA - 4000 K	1334.9	14.5 W	80	6.80
	145-9978	LED-6/18W / 1050 mA - 4000 K	1851.6	21 W	80	6.80
symmetric, very narrow beam [VN] 	145-7338	LED-6/26W / 1400 mA - 2700K	2258.5	29 W	80	6.80
	145-7339	LED-6/26W / 1400 mA - 3000K	2388.8	29 W	80	6.80
	145-7340	LED-6/26W / 1400 mA - 4000K	2497.4	29 W	80	6.80
	145-9979	LED-6/12W / 700 mA - 2700 K	1224.7	14.5 W	80	5.70
	145-9980	LED-6/18W / 1050 mA - 2700 K	1701	21 W	80	6.80

WE-EF LIGHTING USA, LLC




410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted

Floodlights

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	145-9981	LED-6/12W / 700 mA - 3000 K	1315.4	14.5 W	80	5.70
	145-9982	LED-6/18W / 1050 mA - 3000 K	1837.1	21 W	80	6.80
	145-9983	LED-6/12W / 700 mA - 4000 K	1406.2	14.5 W	80	5.70
	145-9984	LED-6/18W / 1050 mA - 4000 K	1950.5	21 W	80	6.80
	145-7341	LED-6/26W / 1400 mA - 2700K	2319.7	29 W	80	6.80
	145-7342	LED-6/26W / 1400 mA - 3000K	2453.5	29 W	80	6.80
	145-7343	LED-6/26W / 1400 mA - 4000K	2565	29 W	80	6.80
	145-9985	LED-6/12W / 700 mA - 2700 K	1259.7	14.5 W	80	5.70
	145-9986	LED-6/18W / 1050 mA - 2700 K	1749.6	21 W	80	6.80
	145-9987	LED-6/12W / 700 mA - 3000 K	1353	14.5 W	80	5.70
	145-9988	LED-6/18W / 1050 mA - 3000 K	1889.5	21 W	80	6.80
	145-9989	LED-6/12W / 700 mA - 4000 K	1446.3	14.5 W	80	5.70
145-9990	LED-6/18W / 1050 mA - 4000 K	2006.2	21 W	80	6.80	
symmetric, wide beam [W] 	145-7332	LED-6/26W / 1400 mA - 2700K	1665.8	29 W	80	6.80
	145-7333	LED-6/26W / 1400 mA - 3000K	1761.9	29 W	80	6.80
	145-7334	LED-6/26W / 1400 mA - 4000K	1842	29 W	80	6.80
	145-9967	LED-6/12W / 700 mA - 2700 K	887.8	14.5 W	80	6.80
	145-9968	LED-6/18W / 1050 mA - 2700 K	1233	21 W	80	6.80
	145-9969	LED-6/12W / 700 mA - 3000 K	953.5	14.5 W	80	6.80
	145-9970	LED-6/18W / 1050 mA - 3000 K	1331.7	21 W	80	6.80
	145-9971	LED-6/12W / 700 mA - 4000 K	1019.3	14.5 W	80	6.80
	145-9972	LED-6/18W / 1050 mA - 4000 K	1413.9	21 W	80	6.80
	wallwash 	145-7335+145-9993	LED-6/26W / 1400 mA - 2700K	1807.9	29 W	80
145-7336+145-9993		LED-6/26W / 1400 mA - 3000K	1912.2	29 W	80	6.80
145-7337+145-9993		LED-6/26W / 1400 mA - 4000K	1999.1	29 W	80	6.80
145-9973+145-9993		LED-6/12W / 700 mA - 2700 K	991.7	14.5 W	80	6.80
145-9974+145-9993		LED-6/18W / 1050 mA - 2700 K	1377.4	21 W	80	6.80
145-9975+145-9993		LED-6/12W / 700 mA - 3000 K	1065.2	14.5 W	80	6.80
145-9976+145-9993		LED-6/18W / 1050 mA - 3000 K	1487.6	21 W	80	6.80
145-9977+145-9993		LED-6/12W / 700 mA - 4000 K	1138.6	14.5 W	80	6.80
145-9978+145-9993		LED-6/18W / 1050 mA - 4000 K	1579.4	21 W	80	6.80

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


FLC321 Surface mounted Floodlights



Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.50

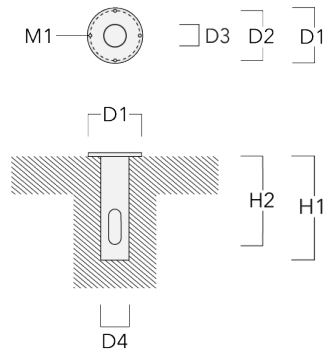

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted

Floodlights


Short post EM

Description	Part ID	A	B	C1	D1	Weight (lb)
Short post EM1 for FLC311/321	146-7169	1.02	7.87	4.72	6.30	3.97

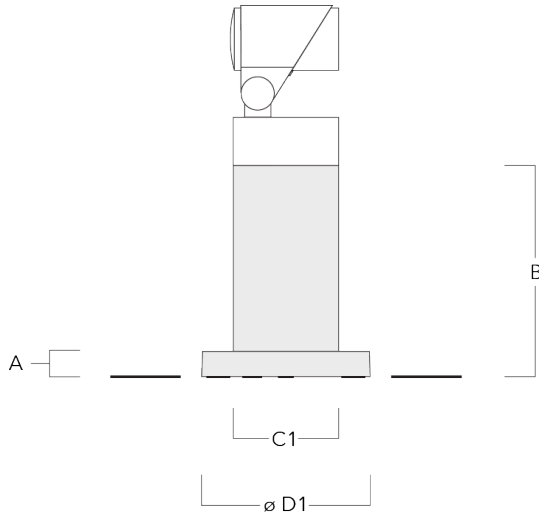

Pole clamp SP

Description	Part ID	D1	Weight (lb)
Pole clamp SP1-M5, single (Ø 38-60)	146-7201	38-60	1.20

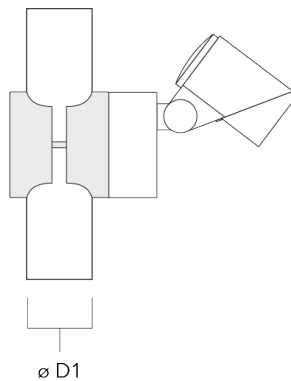


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted Floodlights

Description	Part ID	D1	Weight (lb)
Pole clamp SP1-M5, single (Ø 76-89)	146-7202	76-89	1.10

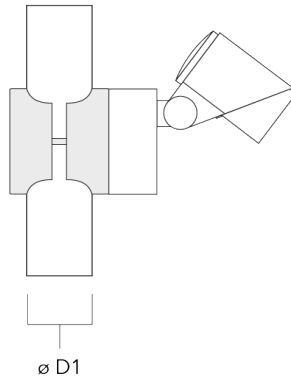

Pole clamp SP2-M5, single (Ø 38-60)	146-7203	38-60	1.30
-------------------------------------	----------	-------	------

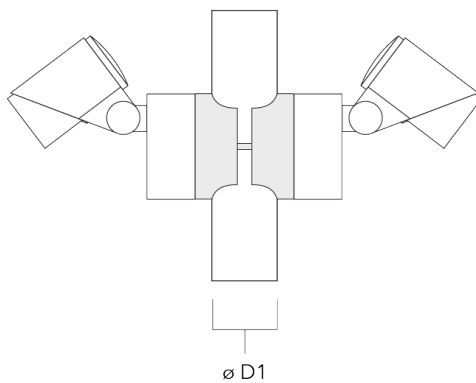

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted



Floodlights

Description	Part ID	D1	Weight (lb)
Pole clamp SP2-M5, single (Ø 76-89)	146-7204	76-89	1.20

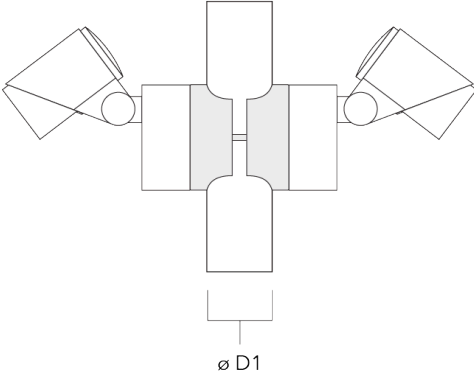

FLC321 Surface mounted

Floodlights



Control

0-10 V, 24VDC low voltage version

Description	Part ID
24VDC low voltage version, 0-10 V	0033

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


FLC321 Surface mounted Floodlights



Optical Accessories

Softening Lens

Description	Part ID	C1
Flood lens IO-360	145-9992	3.43




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted Floodlights


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	145-9991	3.43



Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	145-9993	3.43




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted Floodlights


Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	145-9994	3.43



Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9995	2.17	4.49



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Surface mounted



Floodlights

Snoot

Description	Part ID	A	C1
Snoot ET	145-9996	2.20	4.49

