


FLC321 Wall bracket Floodlights

we-ef

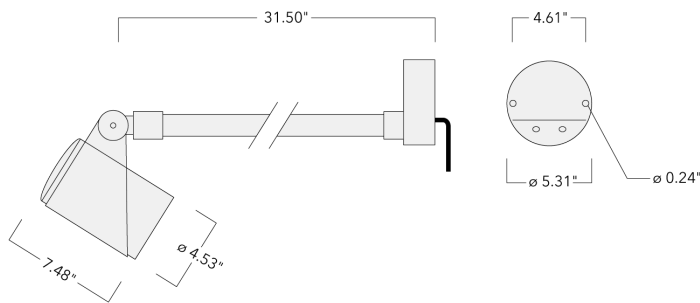

Description

IP66. IK08. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Two cable entries.

12W, 18W, 26W / 120-277V / 0-10V Dimming.
24VDC low voltage versions, ON-OFF. (available upon request)

Knuckle permits 340° rotation, forward tilt 54° and backward tilt 90°.

Remote 24VDC power supply to be ordered separately. Optical accessories are factory-installed. To be specified at time of ordering.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>




Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights

Specifications

Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.969 ft ²

Electrical description

Driver / Ballast	120-277V AC/50-60 Hz (24VDC available upon request)
------------------	---

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam [VN]



linear spread, very narrow beam, 'sharp cut-off'



wallwash

Color temperature



2700 K



3000 K



4000 K

Nominal Watt

0 W





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	145-7350+145-9991	LED-6/26W / 1400 mA - 2700K	2027.2	29 W	80	9.00
	145-7351+145-9991	LED-6/26W / 1400 mA - 3000K	2144.1	29 W	80	9.00
	145-7352+145-9991	LED-6/26W / 1400 mA - 4000K	2241.6	29 W	80	9.00
	145-7912+145-9991	LED-6/12W / 700 mA - 2700 K	1096	14.5 W	80	5.70
	145-7913+145-9991	LED-6/18W / 1050 mA - 2700 K	1522.2	21 W	80	9.00
	145-7914+145-9991	LED-6/12W / 700 mA - 3000 K	1177.2	14.5 W	80	5.70
	145-7915+145-9991	LED-6/18W / 1050 mA - 3000 K	1644	21 W	80	9.00
	145-7916+145-9991	LED-6/12W / 700 mA - 4000 K	1258.4	14.5 W	80	5.70
	145-7917+145-9991	LED-6/18W / 1050 mA - 4000 K	1745.5	21 W	80	9.00
linear spread, very narrow beam, 'sharp cut-off' 	145-7353+145-9991	LED-6/26W / 1400 mA - 2700K	2158.4	29 W	80	9.00
	145-7354+145-9991	LED-6/26W / 1400 mA - 3000K	2282.9	29 W	80	9.00
	145-7355+145-9991	LED-6/26W / 1400 mA - 4000K	2386.7	29 W	80	9.00
	145-7918+145-9991	LED-6/12W / 700 mA - 2700 K	1125.5	14.5 W	80	5.70
	145-7919+145-9991	LED-6/18W / 1050 mA - 2700 K	1563.1	21 W	80	9.00
	145-7920+145-9991	LED-6/12W / 700 mA - 3000 K	1208.8	14.5 W	80	5.70
	145-7921+145-9991	LED-6/18W / 1050 mA - 3000 K	1688.2	21 W	80	9.00
	145-7922+145-9991	LED-6/12W / 700 mA - 4000 K	1292.2	14.5 W	80	5.70
	145-7923+145-9991	LED-6/18W / 1050 mA - 4000 K	1792.4	21 W	80	9.00
symmetric, medium beam [M] 	145-7347	LED-6/26W / 1400 mA - 2700K	2179.3	29 W	80	9.00
	145-7348	LED-6/26W / 1400 mA - 3000K	2305	29 W	80	9.00
	145-7349	LED-6/26W / 1400 mA - 4000K	2409.8	29 W	80	9.00
	145-7906	LED-6/12W / 700 mA - 2700 K	1162.6	14.5 W	80	9.00
	145-7907	LED-6/18W / 1050 mA - 2700 K	1614.8	21 W	80	9.00
	145-7908	LED-6/12W / 700 mA - 3000 K	1248.7	14.5 W	80	9.00
	145-7909	LED-6/18W / 1050 mA - 3000 K	1743.9	21 W	80	9.00
	145-7910	LED-6/12W / 700 mA - 4000 K	1334.9	14.5 W	80	9.00
	145-7911	LED-6/18W / 1050 mA - 4000 K	1851.6	21 W	80	9.00
symmetric, very narrow beam [VN] 	145-7350	LED-6/26W / 1400 mA - 2700K	2258.5	29 W	80	9.00
	145-7351	LED-6/26W / 1400 mA - 3000K	2388.8	29 W	80	9.00
	145-7352	LED-6/26W / 1400 mA - 4000K	2497.4	29 W	80	9.00
	145-7912	LED-6/12W / 700 mA - 2700 K	1224.7	14.5 W	80	5.70
	145-7913	LED-6/18W / 1050 mA - 2700 K	1701	21 W	80	9.00

WE-EF LIGHTING USA, LLC




410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	145-7914	LED-6/12W / 700 mA - 3000 K	1315.4	14.5 W	80	5.70
	145-7915	LED-6/18W / 1050 mA - 3000 K	1837.1	21 W	80	9.00
	145-7916	LED-6/12W / 700 mA - 4000 K	1406.2	14.5 W	80	5.70
	145-7917	LED-6/18W / 1050 mA - 4000 K	1950.5	21 W	80	9.00
	145-7353	LED-6/26W / 1400 mA - 2700K	2319.7	29 W	80	9.00
	145-7354	LED-6/26W / 1400 mA - 3000K	2453.5	29 W	80	9.00
	145-7355	LED-6/26W / 1400 mA - 4000K	2565	29 W	80	9.00
	145-7918	LED-6/12W / 700 mA - 2700 K	1259.7	14.5 W	80	5.70
	145-7919	LED-6/18W / 1050 mA - 2700 K	1749.6	21 W	80	9.00
	145-7920	LED-6/12W / 700 mA - 3000 K	1353	14.5 W	80	5.70
	145-7921	LED-6/18W / 1050 mA - 3000 K	1889.5	21 W	80	9.00
	145-7922	LED-6/12W / 700 mA - 4000 K	1446.3	14.5 W	80	5.70
145-7923	LED-6/18W / 1050 mA - 4000 K	2006.2	21 W	80	9.00	
symmetric, wide beam [W] 	145-7344	LED-6/26W / 1400 mA - 2700K	1665.8	29 W	80	9.00
	145-7345	LED-6/26W / 1400 mA - 3000K	1761.9	29 W	80	9.00
	145-7346	LED-6/26W / 1400 mA - 4000K	1842	29 W	80	9.00
	145-7900	LED-6/12W / 700 mA - 2700 K	887.8	14.5 W	80	9.00
	145-7901	LED-6/18W / 1050 mA - 2700 K	1233	21 W	80	9.00
	145-7902	LED-6/12W / 700 mA - 3000 K	953.5	14.5 W	80	9.00
	145-7903	LED-6/18W / 1050 mA - 3000 K	1331.7	21 W	80	9.00
	145-7904	LED-6/12W / 700 mA - 4000 K	1019.3	14.5 W	80	9.00
	145-7905	LED-6/18W / 1050 mA - 4000 K	1413.9	21 W	80	9.00
	wallwash 	145-7347+145-9993	LED-6/26W / 1400 mA - 2700K	1807.9	29 W	80
145-7348+145-9993		LED-6/26W / 1400 mA - 3000K	1912.2	29 W	80	9.00
145-7349+145-9993		LED-6/26W / 1400 mA - 4000K	1999.1	29 W	80	9.00
145-7906+145-9993		LED-6/12W / 700 mA - 2700 K	991.7	14.5 W	80	9.00
145-7907+145-9993		LED-6/18W / 1050 mA - 2700 K	1377.4	21 W	80	9.00
145-7908+145-9993		LED-6/12W / 700 mA - 3000 K	1065.2	14.5 W	80	9.00
145-7909+145-9993		LED-6/18W / 1050 mA - 3000 K	1487.6	21 W	80	9.00
145-7910+145-9993		LED-6/12W / 700 mA - 4000 K	1138.6	14.5 W	80	9.00
145-7911+145-9993		LED-6/18W / 1050 mA - 4000 K	1579.4	21 W	80	9.00

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights



Control

0-10 V, 24VDC low voltage version

Description	Part ID
24VDC low voltage version, 0-10 V	0033

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024


FLC321 Wall bracket

Floodlights

Optical Accessories

Softening Lens

Description	Part ID	C1
Flood lens IO-360	145-9992	3.43



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	145-9991	3.43



Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	145-9993	3.43



WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights


Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	145-9994	3.43



Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9995	2.17	4.49

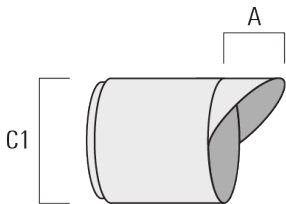

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

FLC321 Wall bracket

Floodlights

Snoot

Description	Part ID	A	C1
Snoot ET	145-9996	2.20	4.49



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024