

Description




IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflective flat safety glass cover, hinged. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Can be used as post top or side entry version. Specification at time of order is recommended.

Spigot \varnothing 76 x 100 mm. Spigot \varnothing 60 x 100 mm or 42 x 100 mm option available. Must be indicated during order placement.

Contact WE-EF direct or your local WE-EF sales representative for an individual solution designed to precisely meet your needs.

Photometric files (IES, LDT) for light distributions [S61] [S65] [S66] [S70] [R60] [R61] [P66] [Q66] [A61] with Backlight Shield on request.

Specifications**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflective safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE+Primer
Windage	0.1956 m ²

Electrical description

Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	In-pole surge protection SP10 device supplied. Please refer to WE-EF installation instructions for details. Use suffix +A for Integral surge protection.

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------


AFL130 LED

Pole mounted

we-ef

Options

Light distribution



asymmetric, side throw [S61]



asymmetric, side throw [S65]



asymmetric, side throw [S70]



rectangular, side throw [R60]



pedestrian/bicycle lane [P66]



asymmetric, forward throw [A61]



square distribution [Q66]



pedestrian crossing, right-hand traffic [P46R]



pedestrian crossing, left-hand traffic [P46L]



asymmetric, side throw [S66]



asymmetric, side throw [S71]



rectangular, side throw [R61]

Colour temperature



2200 K



2700 K



3000 K



4000 K

Nominal Watt

24 W



WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499



info.australia@we-ef.com - <https://we-ef.com/aus>



Subject to technical changes and errors. - Generated on 23/10/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A61] 	102-0179	LED-48/48W / 350 mA - 2200 K	6099.6	52 W	70	8.6
	102-0180	LED-48/48W / 350 mA - 2700 K	6099.6	52 W	80	8.6
	102-0181	LED-48/48W / 350 mA - 3000 K	6520.3	52 W	80	8.6
	102-0182	LED-48/48W / 350 mA - 4000 K	7151.3	52 W	80	8.6
	102-0224	LED-48/72W / 500 mA - 2200 K	8750.8	77 W	70	8.6
	102-0225	LED-48/72W / 500 mA - 2700 K	8750.8	77 W	80	8.6
	102-0226	LED-48/72W / 500 mA - 3000 K	9407.1	77 W	80	8.6
	102-0227	LED-48/72W / 500 mA - 4000 K	10063.4	77 W	80	8.6
	102-0269	LED-48/96W / 700 mA - 2200 K	11813.6	105.5 W	70	8.6
	102-0270	LED-48/96W / 700 mA - 2700 K	11813.6	105.5 W	80	8.6
	102-0271	LED-48/96W / 700 mA - 3000 K	12688.6	105.5 W	80	8.6
	102-0272	LED-48/96W / 700 mA - 4000 K	13563.7	105.5 W	80	8.6
	102-0928	LED-48/144W / 1050 mA - 2200 K	14423.1	159 W	70	8.6
	102-0929	LED-48/144W / 1050 mA - 2700 K	14423.1	159 W	80	8.6
	102-0930	LED-48/144W / 1050 mA - 3000 K	15577	159 W	80	8.6
102-0931	LED-48/144W / 1050 mA - 4000 K	16538.5	159 W	80	8.6	
asymmetric, side throw [S61] 	102-0154	LED-48/48W / 350 mA - 2200 K	6594.1	52 W	70	8.6
	102-0155	LED-48/48W / 350 mA - 2700 K	6594.1	52 W	80	8.6
	102-0156	LED-48/48W / 350 mA - 3000 K	7048.9	52 W	80	8.6
	102-0157	LED-48/48W / 350 mA - 4000 K	7731	52 W	80	8.6
	102-0199	LED-48/72W / 500 mA - 2200 K	8974.4	77 W	70	8.6
	102-0200	LED-48/72W / 500 mA - 2700 K	8974.4	77 W	80	8.6
	102-0201	LED-48/72W / 500 mA - 3000 K	9647.5	77 W	80	8.6
	102-0202	LED-48/72W / 500 mA - 4000 K	10320.6	77 W	80	8.6
	102-0244	LED-48/96W / 700 mA - 2200 K	12115.5	105.5 W	70	8.6
	102-0245	LED-48/96W / 700 mA - 2700 K	12115.5	105.5 W	80	8.6
	102-0246	LED-48/96W / 700 mA - 3000 K	13012.9	105.5 W	80	8.6
	102-0247	LED-48/96W / 700 mA - 4000 K	13910.4	105.5 W	80	8.6
	102-0908	LED-48/144W / 1050 mA - 2200 K	15592.5	159 W	70	8.6
	102-0909	LED-48/144W / 1050 mA - 2700 K	15592.5	159 W	80	8.6
	102-0910	LED-48/144W / 1050 mA - 3000 K	16839.9	159 W	80	8.6
102-0911	LED-48/144W / 1050 mA - 4000 K	17879.4	159 W	80	8.6	
asymmetric, side throw [S65]	102-0159	LED-48/48W / 350 mA - 2200 K	6361.8	52 W	70	8.6
	102-0160	LED-48/48W / 350 mA - 2700 K	6361.8	52 W	80	8.6
	102-0161	LED-48/48W / 350 mA - 3000 K	6800.6	52 W	80	8.6

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)	
	102-0162	LED-48/48W / 350 mA - 4000 K	7458.7	52 W	80	8.6	
	102-0204	LED-48/72W / 500 mA - 2200 K	8774.9	77 W	70	8.6	
	102-0205	LED-48/72W / 500 mA - 2700 K	8774.9	77 W	80	8.6	
	102-0206	LED-48/72W / 500 mA - 3000 K	9433.1	77 W	80	8.6	
	102-0207	LED-48/72W / 500 mA - 4000 K	10091.2	77 W	80	8.6	
	102-0249	LED-48/96W / 700 mA - 2200 K	11846.2	105.5 W	70	8.6	
	102-0250	LED-48/96W / 700 mA - 2700 K	11846.2	105.5 W	80	8.6	
	102-0251	LED-48/96W / 700 mA - 3000 K	12723.7	105.5 W	80	8.6	
	102-0252	LED-48/96W / 700 mA - 4000 K	13601.2	105.5 W	80	8.6	
	102-0912	LED-48/144W / 1050 mA - 2200 K	15795.2	159 W	70	8.6	
	102-0913	LED-48/144W / 1050 mA - 2700 K	15795.2	159 W	80	8.6	
	102-0914	LED-48/144W / 1050 mA - 3000 K	17058.8	159 W	80	8.6	
	102-0915	LED-48/144W / 1050 mA - 4000 K	18111.8	159 W	80	8.6	
	asymmetric, side throw [S66]	102-0350	LED-48/48W / 350 mA - 2200 K	6528.5	52 W	70	8.6
		102-0351	LED-48/48W / 350 mA - 2700 K	6528.5	52 W	80	8.6
102-0352		LED-48/48W / 350 mA - 3000 K	6978.7	52 W	80	8.6	
102-0353		LED-48/48W / 350 mA - 4000 K	7654.1	52 W	80	8.6	
102-0362		LED-48/72W / 500 mA - 2200 K	8576.2	77 W	70	8.6	
102-0363		LED-48/72W / 500 mA - 2700 K	8576.2	77 W	80	8.6	
102-0364		LED-48/72W / 500 mA - 3000 K	9219.4	77 W	80	8.6	
102-0365		LED-48/72W / 500 mA - 4000 K	9862.7	77 W	80	8.6	
102-0374		LED-48/96W / 700 mA - 2200 K	11577.9	105.5 W	70	8.6	
102-0375		LED-48/96W / 700 mA - 2700 K	11577.9	105.5 W	80	8.6	
102-0376		LED-48/96W / 700 mA - 3000 K	12435.5	105.5 W	80	8.6	
102-0377		LED-48/96W / 700 mA - 4000 K	13293.2	105.5 W	80	8.6	
102-0944		LED-48/144W / 1050 mA - 2200 K	15437.4	159 W	70	8.6	
102-0945		LED-48/144W / 1050 mA - 2700 K	15437.4	159 W	80	8.6	
102-0946		LED-48/144W / 1050 mA - 3000 K	16672.4	159 W	80	8.6	
102-0947	LED-48/144W / 1050 mA - 4000 K	17701.5	159 W	80	8.6		
asymmetric, side throw [S70]	102-0164	LED-48/48W / 350 mA - 2200 K	6600.9	52 W	70	8.6	
	102-0165	LED-48/48W / 350 mA - 2700 K	6600.9	52 W	80	8.6	
	102-0166	LED-48/48W / 350 mA - 3000 K	7056.1	52 W	80	8.6	
	102-0167	LED-48/48W / 350 mA - 4000 K	7739	52 W	80	8.6	
	102-0209	LED-48/72W / 500 mA - 2200 K	8875.3	77 W	70	8.6	
	102-0210	LED-48/72W / 500 mA - 2700 K	8875.3	77 W	80	8.6	
	102-0211	LED-48/72W / 500 mA - 3000 K	9541	77 W	80	8.6	

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0212	LED-48/72W / 500 mA - 4000 K	10206.6	77 W	80	8.6
	102-0254	LED-48/96W / 700 mA - 2200 K	11981.7	105.5 W	70	8.6
	102-0255	LED-48/96W / 700 mA - 2700 K	11981.7	105.5 W	80	8.6
	102-0256	LED-48/96W / 700 mA - 3000 K	12869.2	105.5 W	80	8.6
	102-0257	LED-48/96W / 700 mA - 4000 K	13756.8	105.5 W	80	8.6
	102-0916	LED-48/144W / 1050 mA - 2200 K	15608.5	159 W	70	8.6
	102-0917	LED-48/144W / 1050 mA - 2700 K	15608.5	159 W	80	8.6
	102-0918	LED-48/144W / 1050 mA - 3000 K	16857.1	159 W	80	8.6
	102-0919	LED-48/144W / 1050 mA - 4000 K	17897.7	159 W	80	8.6
asymmetric, side throw [S71]	102-0354	LED-48/48W / 350 mA - 2200 K	6025.3	52 W	70	8.6
	102-0355	LED-48/48W / 350 mA - 2700 K	6025.3	52 W	80	8.6
	102-0356	LED-48/48W / 350 mA - 3000 K	6440.8	52 W	80	8.6
	102-0357	LED-48/48W / 350 mA - 4000 K	7064.1	52 W	80	8.6
	102-0366	LED-48/72W / 500 mA - 2200 K	7915.2	77 W	70	8.6
	102-0367	LED-48/72W / 500 mA - 2700 K	7915.2	77 W	80	8.6
	102-0368	LED-48/72W / 500 mA - 3000 K	8508.9	77 W	80	8.6
	102-0369	LED-48/72W / 500 mA - 4000 K	9102.5	77 W	80	8.6
	102-0378	LED-48/96W / 700 mA - 2200 K	10685.5	105.5 W	70	8.6
	102-0379	LED-48/96W / 700 mA - 2700 K	10685.5	105.5 W	80	8.6
	102-0380	LED-48/96W / 700 mA - 3000 K	11477.1	105.5 W	80	8.6
	102-0381	LED-48/96W / 700 mA - 4000 K	12268.6	105.5 W	80	8.6
pedestrian crossing, left-hand traffic [P46L]	102-0194	LED-48/48W / 350 mA - 2200 K	6704.2	52 W	70	8.6
	102-0195	LED-48/48W / 350 mA - 2700 K	6704.2	52 W	80	8.6
	102-0196	LED-48/48W / 350 mA - 3000 K	7166.5	52 W	80	8.6
	102-0197	LED-48/48W / 350 mA - 4000 K	7860	52 W	80	8.6
	102-0239	LED-48/72W / 500 mA - 2200 K	9145.3	77 W	70	8.6
	102-0240	LED-48/72W / 500 mA - 2700 K	9145.3	77 W	80	8.6
	102-0241	LED-48/72W / 500 mA - 3000 K	9831.2	77 W	80	8.6
	102-0242	LED-48/72W / 500 mA - 4000 K	10517.1	77 W	80	8.6
	102-0284	LED-48/96W / 700 mA - 2200 K	12346.2	105.5 W	70	8.6
	102-0285	LED-48/96W / 700 mA - 2700 K	12346.2	105.5 W	80	8.6
	102-0286	LED-48/96W / 700 mA - 3000 K	13260.7	105.5 W	80	8.6
	102-0287	LED-48/96W / 700 mA - 4000 K	14175.3	105.5 W	80	8.6
	102-0940	LED-48/144W / 1050 mA - 2200 K	15852.7	159 W	70	8.6
	102-0941	LED-48/144W / 1050 mA - 2700 K	15852.7	159 W	80	8.6
	102-0942	LED-48/144W / 1050 mA - 3000 K	17120.9	159 W	80	8.6

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0943	LED-48/144W / 1050 mA - 4000 K	18177.8	159 W	80	8.6
pedestrian crossing, right-hand traffic [P46R] 	102-0189	LED-48/48W / 350 mA - 2200 K	6640.5	52 W	70	8.6
	102-0190	LED-48/48W / 350 mA - 2700 K	6640.5	52 W	80	8.6
	102-0191	LED-48/48W / 350 mA - 3000 K	7098.4	52 W	80	8.6
	102-0192	LED-48/48W / 350 mA - 4000 K	7785.4	52 W	80	8.6
	102-0234	LED-48/72W / 500 mA - 2200 K	9016.9	77 W	70	8.6
	102-0235	LED-48/72W / 500 mA - 2700 K	9016.9	77 W	80	8.6
	102-0236	LED-48/72W / 500 mA - 3000 K	9693.2	77 W	80	8.6
	102-0237	LED-48/72W / 500 mA - 4000 K	10369.5	77 W	80	8.6
	102-0279	LED-48/96W / 700 mA - 2200 K	12172.9	105.5 W	70	8.6
	102-0280	LED-48/96W / 700 mA - 2700 K	12172.9	105.5 W	80	8.6
	102-0281	LED-48/96W / 700 mA - 3000 K	13074.6	105.5 W	80	8.6
	102-0282	LED-48/96W / 700 mA - 4000 K	13976.3	105.5 W	80	8.6
	102-0936	LED-48/144W / 1050 mA - 2200 K	15702	159 W	70	8.6
	102-0937	LED-48/144W / 1050 mA - 2700 K	15702	159 W	80	8.6
	102-0938	LED-48/144W / 1050 mA - 3000 K	16958.1	159 W	80	8.6
	102-0939	LED-48/144W / 1050 mA - 4000 K	18004.9	159 W	80	8.6
pedestrian/bicycle lane [P66] 	102-0174	LED-48/48W / 350 mA - 2200 K	6167.1	52 W	70	8.6
	102-0175	LED-48/48W / 350 mA - 2700 K	6167.1	52 W	80	8.6
	102-0176	LED-48/48W / 350 mA - 3000 K	6592.4	52 W	80	8.6
	102-0177	LED-48/48W / 350 mA - 4000 K	7230.4	52 W	80	8.6
	102-0219	LED-48/72W / 500 mA - 2200 K	8459.9	77 W	70	8.6
	102-0220	LED-48/72W / 500 mA - 2700 K	8459.9	77 W	80	8.6
	102-0221	LED-48/72W / 500 mA - 3000 K	9094.4	77 W	80	8.6
	102-0222	LED-48/72W / 500 mA - 4000 K	9728.9	77 W	80	8.6
	102-0264	LED-48/96W / 700 mA - 2200 K	11420.9	105.5 W	70	8.6
	102-0265	LED-48/96W / 700 mA - 2700 K	11420.9	105.5 W	80	8.6
	102-0266	LED-48/96W / 700 mA - 3000 K	12266.9	105.5 W	80	8.6
	102-0267	LED-48/96W / 700 mA - 4000 K	13112.9	105.5 W	80	8.6
	102-0924	LED-48/144W / 1050 mA - 2200 K	14582.9	159 W	70	8.6
	102-0925	LED-48/144W / 1050 mA - 2700 K	14582.9	159 W	80	8.6
	102-0926	LED-48/144W / 1050 mA - 3000 K	15749.5	159 W	80	8.6
	102-0927	LED-48/144W / 1050 mA - 4000 K	16721.7	159 W	80	8.6
rectangular, side throw [R60]	102-0169	LED-48/48W / 350 mA - 2200 K	6081.9	52 W	70	8.6
	102-0170	LED-48/48W / 350 mA - 2700 K	6081.9	52 W	80	8.6
	102-0171	LED-48/48W / 350 mA - 3000 K	6501.4	52 W	80	8.6

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0172	LED-48/48W / 350 mA - 4000 K	7130.5	52 W	80	8.6
	102-0214	LED-48/72W / 500 mA - 2200 K	8751.4	77 W	70	8.6
	102-0215	LED-48/72W / 500 mA - 2700 K	8751.4	77 W	80	8.6
	102-0216	LED-48/72W / 500 mA - 3000 K	9407.8	77 W	80	8.6
	102-0217	LED-48/72W / 500 mA - 4000 K	10064.2	77 W	80	8.6
	102-0259	LED-48/96W / 700 mA - 2200 K	11814.4	105.5 W	70	8.6
	102-0260	LED-48/96W / 700 mA - 2700 K	11814.4	105.5 W	80	8.6
	102-0261	LED-48/96W / 700 mA - 3000 K	12689.6	105.5 W	80	8.6
	102-0262	LED-48/96W / 700 mA - 4000 K	13564.7	105.5 W	80	8.6
	102-0920	LED-48/144W / 1050 mA - 2200 K	14519.4	159 W	70	8.6
	102-0921	LED-48/144W / 1050 mA - 2700 K	14519.4	159 W	80	8.6
	102-0922	LED-48/144W / 1050 mA - 3000 K	15680.9	159 W	80	8.6
	102-0923	LED-48/144W / 1050 mA - 4000 K	16648.9	159 W	80	8.6
rectangular, side throw [R61] 	102-0358	LED-48/48W / 350 mA - 2200 K	6039.9	52 W	70	8.6
	102-0359	LED-48/48W / 350 mA - 2700 K	6039.9	52 W	80	8.6
	102-0360	LED-48/48W / 350 mA - 3000 K	6456.5	52 W	80	8.6
	102-0361	LED-48/48W / 350 mA - 4000 K	7081.3	52 W	80	8.6
	102-0370	LED-48/72W / 500 mA - 2200 K	7934.4	77 W	70	8.6
	102-0371	LED-48/72W / 500 mA - 2700 K	7934.4	77 W	80	8.6
	102-0372	LED-48/72W / 500 mA - 3000 K	8529.5	77 W	80	8.6
	102-0373	LED-48/72W / 500 mA - 4000 K	9124.5	77 W	80	8.6
	102-0382	LED-48/96W / 700 mA - 2200 K	10711.4	105.5 W	70	8.6
	102-0383	LED-48/96W / 700 mA - 2700 K	10711.4	105.5 W	80	8.6
	102-0384	LED-48/96W / 700 mA - 3000 K	11504.9	105.5 W	80	8.6
	102-0385	LED-48/96W / 700 mA - 4000 K	12298.3	105.5 W	80	8.6
	102-0952	LED-48/144W / 1050 mA - 2200 K	14282.1	159 W	70	8.6
	102-0953	LED-48/144W / 1050 mA - 2700 K	14282.1	159 W	80	8.6
	102-0954	LED-48/144W / 1050 mA - 3000 K	15424.7	159 W	80	8.6
	102-0955	LED-48/144W / 1050 mA - 4000 K	16376.8	159 W	80	8.6
	square distribution [Q66] 	102-0184	LED-48/48W / 350 mA - 2200 K	6198.8	52 W	70
102-0185		LED-48/48W / 350 mA - 2700 K	6198.8	52 W	80	8.6
102-0186		LED-48/48W / 350 mA - 3000 K	6626.3	52 W	80	8.6
102-0187		LED-48/48W / 350 mA - 4000 K	7267.6	52 W	80	8.6
102-0229		LED-48/72W / 500 mA - 2200 K	8573.7	77 W	70	8.6
102-0230		LED-48/72W / 500 mA - 2700 K	8573.7	77 W	80	8.6
102-0231		LED-48/72W / 500 mA - 3000 K	9216.7	77 W	80	8.6

AFL130 LED

Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0232	LED-48/72W / 500 mA - 4000 K	9859.8	77 W	80	8.6
	102-0274	LED-48/96W / 700 mA - 2200 K	11574.5	105.5 W	70	8.6
	102-0275	LED-48/96W / 700 mA - 2700 K	11574.5	105.5 W	80	8.6
	102-0276	LED-48/96W / 700 mA - 3000 K	12431.9	105.5 W	80	8.6
	102-0277	LED-48/96W / 700 mA - 4000 K	13289.2	105.5 W	80	8.6
	102-0932	LED-48/144W / 1050 mA - 2200 K	14657.9	159 W	70	8.6
	102-0933	LED-48/144W / 1050 mA - 2700 K	14657.9	159 W	80	8.6
	102-0934	LED-48/144W / 1050 mA - 3000 K	15830.6	159 W	80	8.6
	102-0935	LED-48/144W / 1050 mA - 4000 K	16807.8	159 W	80	8.6

AFL130 LED

Pole mounted

we-ef

Control

Eco Step Dim® Advanced

Description	Part ID
Eco Step Dim® Advanced LED	430-0002

R2C Ready to Connect

Description	Part ID
R2C Ready to Connect (top)	430-0019
R2C Ready to Connect (below)	430-0027
R2C Ready to Connect (top and below)	430-0032

WE-EF LIGHTING Pty Ltd


6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/10/2024

Mounting Accessories**Bird deterrent**

Description	Part ID
Bird deterrent BD	430-0015



Adaptor

Description	Part ID
Adaptor AFL100	102-0392



Wall and pole brackets RE**WE-EF LIGHTING Pty Ltd**


6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>


Subject to technical changes and errors. - Generated on 23/10/2024

Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)
RE2-540 Pole bracket, double	111-0043	200			76 x 130	550		5.30

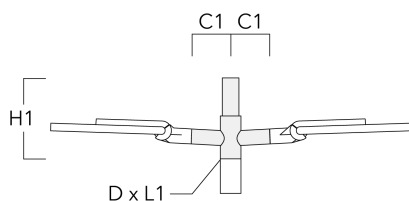


RE0-540 Wall bracket	111-0084	180	230	195		12	3.20	
----------------------	----------	-----	-----	-----	--	----	------	--

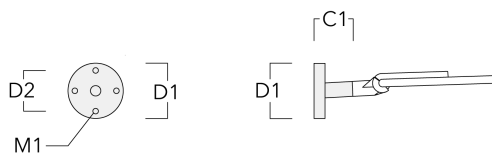


Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)
RE1-540 Pole bracket, single	111-0042	200			76 x 130	500		4.60




Pole brackets RF

Description	Part ID	C1	D × L1	H1	Weight (kg)
RF2-540 Pole bracket, double	111-0047	200	76 x 80	200	3.30

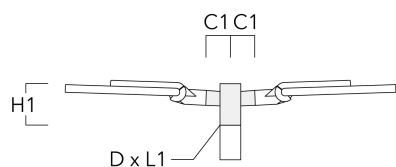


Pole mounted

Description	Part ID	C1	D × L1	H1	Weight (kg)
RF1-540 Pole bracket, single	111-0046	200	76 x 80	200	2.60




Wall and pole brackets RX

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX1-540 Pole bracket, single	111-0054	1000			76 x 130	550				6.8

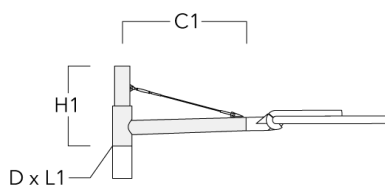


Pole mounted

Description	Part ID	C1	D1	D2	D x L1	H1	H2	M1	M2	Weight (kg)
RX2-540 Pole bracket, double	111-0055	1000			76 x 130	550				9.70

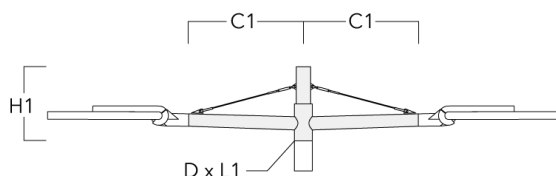


RX0-540 Wall bracket	111-0086	1000	140	100		450	385	30	12	5.20
----------------------	----------	------	-----	-----	--	-----	-----	----	----	------

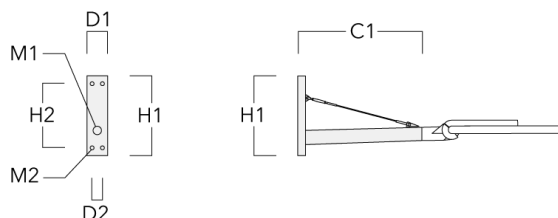

Optical Accessories**Backlight shield**

Description	Part ID	Additional information
LS180	003-4123	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S61][S66][R61][P66][Q66][A61] lenses. Must be specified at time of ordering.



AFL130 LED

Pole mounted

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria

Phone: +61 3 8587 0444

Fax: +61 3 8587 0499

info.australia@we-ef.com

<https://we-ef.com/aus>

Subject to technical changes and errors.

Generated on 23/10/2024