

**Description**

IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflective flat safety glass cover, hinged. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Can be used as post top or side entry version. Specification at time of order is recommended.

Spigot Ø 3" x 4"

Contact WE-EF direct or your local WE-EF sales representative for an individual solution designed to precisely meet your needs.

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.

**Street and Area Lighting**

---

**Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflective safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.1956 m <sup>2</sup>

---

**Electrical description**

---

Driver / Ballast	Integral EC electronic converter. 0-10V
Power factor	> 0.9
Surge protection	6/6kV, optional 10kV

---

**Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
----------	----------------------------

---

**Options**

**Light distribution**

**Color temperature**

**Nominal Watt**



[S61] Type III Short



[S65] Type III Medium



[S70] Type II Short



rectangular, side throw [R60]



[P66] Type II Medium



[A61] Type IV Very Short



square distribution [Q66]



pedestrian crossing, right-hand traffic [P46R]



pedestrian crossing, left-hand traffic [P46L]



asymmetric, side throw beam [S66]



asymmetric, side throw [S71]



rectangular, side throw [R61]



2200 K



2700 K



3000 K




4000 K

24 W

## Street and Area Lighting

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
[A61] Type IV Very Short 	102-0179	LED-48/48W / 350 mA - 2200 K	6099.6	52 W	70	19
	102-0180	LED-48/48W / 350 mA - 2700 K	6099.6	52 W	80	19
	102-0180-70	LED-48/48W / 350 mA - 2700 K	6520.3	52 W	70	19
	102-0181	LED-48/48W / 350 mA - 3000 K	6520.3	52 W	80	19
	102-0181-70	LED-48/48W / 350 mA - 3000 K	7572	52 W	70	19
	102-0182	LED-48/48W / 350 mA - 4000 K	7151.3	52 W	80	19
	102-0182-70	LED-48/48W / 350 mA - 4000 K	7992.6	52 W	70	19
	102-0224	LED-48/72W / 500 mA - 2200 K	8422.6	77 W	70	19
	102-0225	LED-48/72W / 500 mA - 2700 K	8750.8	77 W	80	19
	102-0225-70	LED-48/72W / 500 mA - 2700 K	9407.1	77 W	70	19
	102-0226	LED-48/72W / 500 mA - 3000 K	9407.1	77 W	80	19
	102-0226-70	LED-48/72W / 500 mA - 3000 K	10719.7	77 W	70	19
	102-0227	LED-48/72W / 500 mA - 4000 K	10063.4	77 W	80	19
	102-0227-70	LED-48/72W / 500 mA - 4000 K	11376	77 W	70	19
	102-0269	LED-48/96W / 700 mA - 2200 K	11813.6	105.5 W	70	19
	102-0270	LED-48/96W / 700 mA - 2700 K	11813.6	105.5 W	80	19
	102-0270-70	LED-48/96W / 700 mA - 2700 K	12688.6	105.5 W	70	19
	102-0271	LED-48/96W / 700 mA - 3000 K	12688.6	105.5 W	80	19
	102-0271-70	LED-48/96W / 700 mA - 3000 K	14438.8	105.5 W	70	19
	102-0272	LED-48/96W / 700 mA - 4000 K	13563.7	105.5 W	80	19
	102-0272-70	LED-48/96W / 700 mA - 4000 K	15313.9	105.5 W	70	19
	102-0928	LED-48/144W / 1050 mA - 2200 K	14423.1	154 W	70	19
	102-0929	LED-48/144W / 1050 mA - 2700 K	14423.1	154 W	80	19
	102-0929-70	LED-48/144W / 1050 mA - 2700 K	18077	154 W	70	19
	102-0930	LED-48/144W / 1050 mA - 3000 K	15577	154 W	80	19
	102-0930-70	LED-48/144W / 1050 mA - 3000 K	18846.2	154 W	70	19
	102-0931	LED-48/144W / 1050 mA - 4000 K	16538.5	154 W	80	19
102-0931-70	LED-48/144W / 1050 mA - 4000 K	19615.5	154 W	70	19	
[P66] Type II Medium	102-0174	LED-48/48W / 350 mA - 2200 K	6167.1	52 W	70	19
	102-0175	LED-48/48W / 350 mA - 2700 K	6167.1	52 W	80	19
	102-0175-70	LED-48/48W / 350 mA - 2700 K	6592.4	52 W	70	19
	102-0176	LED-48/48W / 350 mA - 3000 K	6592.4	52 W	80	19


## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0176-70	LED-48/48W / 350 mA - 3000 K	7655.7	52 W	70	19
	102-0177	LED-48/48W / 350 mA - 4000 K	7230.4	52 W	80	19
	102-0177-70	LED-48/48W / 350 mA - 4000 K	8081	52 W	70	19
	102-0219	LED-48/72W / 500 mA - 2200 K	8142.7	77 W	70	19
	102-0220	LED-48/72W / 500 mA - 2700 K	8459.9	77 W	80	19
	102-0220-70	LED-48/72W / 500 mA - 2700 K	9094.4	77 W	70	19
	102-0221	LED-48/72W / 500 mA - 3000 K	9094.4	77 W	80	19
	102-0221-70	LED-48/72W / 500 mA - 3000 K	10363.4	77 W	70	19
	102-0222	LED-48/72W / 500 mA - 4000 K	9728.9	77 W	80	19
	102-0222-70	LED-48/72W / 500 mA - 4000 K	10997.9	77 W	70	19
	102-0264	LED-48/96W / 700 mA - 2200 K	11420.9	105.5 W	70	19
	102-0265	LED-48/96W / 700 mA - 2700 K	11420.9	105.5 W	80	19
	102-0265-70	LED-48/96W / 700 mA - 2700 K	12266.9	105.5 W	70	19
	102-0266	LED-48/96W / 700 mA - 3000 K	12266.9	105.5 W	80	19
	102-0266-70	LED-48/96W / 700 mA - 3000 K	13958.9	105.5 W	70	19
	102-0267	LED-48/96W / 700 mA - 4000 K	13112.9	105.5 W	80	19
	102-0267-70	LED-48/96W / 700 mA - 4000 K	14804.8	105.5 W	70	19
	102-0924	LED-48/144W / 1050 mA - 2200 K	14582.9	154 W	70	19
	102-0925	LED-48/144W / 1050 mA - 2700 K	14582.9	154 W	80	19
	102-0925-70	LED-48/144W / 1050 mA - 2700 K	18277.2	154 W	70	19
102-0926	LED-48/144W / 1050 mA - 3000 K	15749.5	154 W	80	19	
102-0926-70	LED-48/144W / 1050 mA - 3000 K	19054.9	154 W	70	19	
102-0927	LED-48/144W / 1050 mA - 4000 K	16721.7	154 W	80	19	
102-0927-70	LED-48/144W / 1050 mA - 4000 K	19832.7	154 W	70	19	
[S61] Type III Short	102-0154	LED-48/48W / 350 mA - 2200 K	6594.1	52 W	70	19
	102-0155	LED-48/48W / 350 mA - 2700 K	6594.1	52 W	80	19
	102-0155-70	LED-48/48W / 350 mA - 2700 K	7048.9	52 W	70	19
	102-0156	LED-48/48W / 350 mA - 3000 K	7048.9	52 W	80	19
	102-0156-70	LED-48/48W / 350 mA - 3000 K	8185.8	52 W	70	19
	102-0157	LED-48/48W / 350 mA - 4000 K	7731	52 W	80	19
	102-0157-70	LED-48/48W / 350 mA - 4000 K	8640.6	52 W	70	19
	102-0199	LED-48/72W / 500 mA - 2200 K	8637.9	77 W	70	19
	102-0200	LED-48/72W / 500 mA - 2700 K	8974.4	77 W	80	19


**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0200-70	LED-48/72W / 500 mA - 2700 K	9647.5	77 W	70	19
	102-0201	LED-48/72W / 500 mA - 3000 K	9647.5	77 W	80	19
	102-0201-70	LED-48/72W / 500 mA - 3000 K	10993.7	77 W	70	19
	102-0202	LED-48/72W / 500 mA - 4000 K	10320.6	77 W	80	19
	102-0202-70	LED-48/72W / 500 mA - 4000 K	11666.8	77 W	70	19
	102-0244	LED-48/96W / 700 mA - 2200 K	12115.5	105.5 W	70	19
	102-0245	LED-48/96W / 700 mA - 2700 K	12115.5	105.5 W	80	19
	102-0245-70	LED-48/96W / 700 mA - 2700 K	13012.9	105.5 W	70	19
	102-0246	LED-48/96W / 700 mA - 3000 K	13012.9	105.5 W	80	19
	102-0246-70	LED-48/96W / 700 mA - 3000 K	14807.8	105.5 W	70	19
	102-0247	LED-48/96W / 700 mA - 4000 K	13910.4	105.5 W	80	19
	102-0247-70	LED-48/96W / 700 mA - 4000 K	15705.3	105.5 W	70	19
	102-0908	LED-48/144W / 1050 mA - 2200 K	15592.5	154 W	70	19
	102-0909	LED-48/144W / 1050 mA - 2700 K	15592.5	154 W	80	19
	102-0909-70	LED-48/144W / 1050 mA - 2700 K	19542.6	154 W	70	19
	102-0910	LED-48/144W / 1050 mA - 3000 K	16839.9	154 W	80	19
	102-0910-70	LED-48/144W / 1050 mA - 3000 K	20374.2	154 W	70	19
	102-0911	LED-48/144W / 1050 mA - 4000 K	17879.4	154 W	80	19
	102-0911-70	LED-48/144W / 1050 mA - 4000 K	21205.8	154 W	70	19
[S65] Type III Medium	102-0159	LED-48/48W / 350 mA - 2200 K	6361.8	52 W	70	19
	102-0160	LED-48/48W / 350 mA - 2700 K	6361.8	52 W	80	19
	102-0160-70	LED-48/48W / 350 mA - 2700 K	6800.6	52 W	70	19
	102-0161	LED-48/48W / 350 mA - 3000 K	6800.6	52 W	80	19
	102-0161-70	LED-48/48W / 350 mA - 3000 K	7897.5	52 W	70	19
	102-0162	LED-48/48W / 350 mA - 4000 K	7458.7	52 W	80	19
	102-0162-70	LED-48/48W / 350 mA - 4000 K	8336.2	52 W	70	19
	102-0204	LED-48/72W / 500 mA - 2200 K	8445.9	77 W	70	19
	102-0205	LED-48/72W / 500 mA - 2700 K	8774.9	77 W	80	19
	102-0205-70	LED-48/72W / 500 mA - 2700 K	9433.1	77 W	70	19
	102-0206	LED-48/72W / 500 mA - 3000 K	9433.1	77 W	80	19
	102-0206-70	LED-48/72W / 500 mA - 3000 K	10749.3	77 W	70	19
	102-0207	LED-48/72W / 500 mA - 4000 K	10091.2	77 W	80	19
	102-0207-70	LED-48/72W / 500 mA - 4000 K	11407.4	77 W	70	19


**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0249	LED-48/96W / 700 mA - 2200 K	11846.2	105.5 W	70	19
	102-0250	LED-48/96W / 700 mA - 2700 K	11846.2	105.5 W	80	19
	102-0250-70	LED-48/96W / 700 mA - 2700 K	12723.7	105.5 W	70	19
	102-0251	LED-48/96W / 700 mA - 3000 K	12723.7	105.5 W	80	19
	102-0251-70	LED-48/96W / 700 mA - 3000 K	14478.7	105.5 W	70	19
	102-0252	LED-48/96W / 700 mA - 4000 K	13601.2	105.5 W	80	19
	102-0252-70	LED-48/96W / 700 mA - 4000 K	15356.2	105.5 W	70	19
	102-0912	LED-48/144W / 1050 mA - 2200 K	15795.2	154 W	70	19
	102-0913	LED-48/144W / 1050 mA - 2700 K	15795.2	154 W	80	19
	102-0913-70	LED-48/144W / 1050 mA - 2700 K	19796.6	154 W	70	19
	102-0914	LED-48/144W / 1050 mA - 3000 K	17058.8	154 W	80	19
	102-0914-70	LED-48/144W / 1050 mA - 3000 K	20639.1	154 W	70	19
	102-0915	LED-48/144W / 1050 mA - 4000 K	18111.8	154 W	80	19
	102-0915-70	LED-48/144W / 1050 mA - 4000 K	21481.5	154 W	70	19
[S70] Type II Short	102-0164	LED-48/48W / 350 mA - 2200 K	6600.9	52 W	70	19
	102-0165	LED-48/48W / 350 mA - 2700 K	6600.9	52 W	80	19
	102-0165-70	LED-48/48W / 350 mA - 2700 K	7056.1	52 W	70	19
	102-0166	LED-48/48W / 350 mA - 3000 K	7056.1	52 W	80	19
	102-0166-70	LED-48/48W / 350 mA - 3000 K	8194.2	52 W	70	19
	102-0167	LED-48/48W / 350 mA - 4000 K	7739	52 W	80	19
	102-0167-70	LED-48/48W / 350 mA - 4000 K	8649.4	52 W	70	19
	102-0209	LED-48/72W / 500 mA - 2200 K	8542.5	77 W	70	19
	102-0210	LED-48/72W / 500 mA - 2700 K	8875.3	77 W	80	19
	102-0210-70	LED-48/72W / 500 mA - 2700 K	9541	77 W	70	19
	102-0211	LED-48/72W / 500 mA - 3000 K	9541	77 W	80	19
	102-0211-70	LED-48/72W / 500 mA - 3000 K	10872.3	77 W	70	19
	102-0212	LED-48/72W / 500 mA - 4000 K	10206.6	77 W	80	19
	102-0212-70	LED-48/72W / 500 mA - 4000 K	11537.9	77 W	70	19
	102-0254	LED-48/96W / 700 mA - 2200 K	11981.7	105.5 W	70	19
	102-0255	LED-48/96W / 700 mA - 2700 K	11981.7	105.5 W	80	19
	102-0255-70	LED-48/96W / 700 mA - 2700 K	12869.2	105.5 W	70	19
	102-0256	LED-48/96W / 700 mA - 3000 K	12869.2	105.5 W	80	19
	102-0256-70	LED-48/96W / 700 mA - 3000 K	14644.3	105.5 W	70	19

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0257	LED-48/96W / 700 mA - 4000 K	13756.8	105.5 W	80	19
	102-0257-70	LED-48/96W / 700 mA - 4000 K	15531.8	105.5 W	70	19
	102-0916	LED-48/144W / 1050 mA - 2200 K	15608.5	154 W	70	19
	102-0917	LED-48/144W / 1050 mA - 2700 K	15608.5	154 W	80	19
	102-0917-70	LED-48/144W / 1050 mA - 2700 K	19562.6	154 W	70	19
	102-0918	LED-48/144W / 1050 mA - 3000 K	16857.1	154 W	80	19
	102-0918-70	LED-48/144W / 1050 mA - 3000 K	20395	154 W	70	19
	102-0919	LED-48/144W / 1050 mA - 4000 K	17897.7	154 W	80	19
	102-0919-70	LED-48/144W / 1050 mA - 4000 K	21227.5	154 W	70	19
asymmetric, side throw [S71]	102-0354	LED-48/48W / 350 mA - 2200 K	6025.3	52 W	70	19
	102-0355	LED-48/48W / 350 mA - 2700 K	6025.3	52 W	80	19
	102-0355-70	LED-48/48W / 350 mA - 2700 K	6440.8	52 W	70	19
	102-0356	LED-48/48W / 350 mA - 3000 K	6440.8	52 W	80	19
	102-0356-70	LED-48/48W / 350 mA - 3000 K	7479.6	52 W	70	19
	102-0357	LED-48/48W / 350 mA - 4000 K	7064.1	52 W	80	19
	102-0357-70	LED-48/48W / 350 mA - 4000 K	7895.2	52 W	70	19
	102-0366	LED-48/72W / 500 mA - 2200 K	7618.4	77 W	70	19
	102-0367	LED-48/72W / 500 mA - 2700 K	7915.2	77 W	80	19
	102-0367-70	LED-48/72W / 500 mA - 2700 K	8508.9	77 W	70	19
	102-0368	LED-48/72W / 500 mA - 3000 K	8508.9	77 W	80	19
	102-0368-70	LED-48/72W / 500 mA - 3000 K	9696.1	77 W	70	19
	102-0369	LED-48/72W / 500 mA - 4000 K	9102.5	77 W	80	19
	102-0369-70	LED-48/72W / 500 mA - 4000 K	10289.8	77 W	70	19
	102-0378	LED-48/96W / 700 mA - 2200 K	10685.5	105.5 W	70	19
	102-0379	LED-48/96W / 700 mA - 2700 K	10685.5	105.5 W	80	19
	102-0379-70	LED-48/96W / 700 mA - 2700 K	11477.1	105.5 W	70	19
	102-0380	LED-48/96W / 700 mA - 3000 K	11477.1	105.5 W	80	19
	102-0380-70	LED-48/96W / 700 mA - 3000 K	13060.1	105.5 W	70	19
	102-0381	LED-48/96W / 700 mA - 4000 K	12268.6	105.5 W	80	19
	102-0381-70	LED-48/96W / 700 mA - 4000 K	13851.6	105.5 W	70	19
	102-0948	LED-48/144W / 1050 mA - 2200 K	14247.6	154 W	70	19
	102-0949	LED-48/144W / 1050 mA - 2700 K	14247.6	154 W	80	19
	102-0949-70	LED-48/144W / 1050 mA - 2700 K	17857	154 W	70	19


**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0950	LED-48/144W / 1050 mA - 3000 K	15387.4	154 W	80	19
	102-0950-70	LED-48/144W / 1050 mA - 3000 K	18616.9	154 W	70	19
	102-0951	LED-48/144W / 1050 mA - 4000 K	16337.3	154 W	80	19
	102-0951-70	LED-48/144W / 1050 mA - 4000 K	19376.8	154 W	70	19
asymmetric, side throw beam [S66]	102-0350	LED-48/48W / 350 mA - 2200 K	6528.5	52 W	70	19
	102-0351	LED-48/48W / 350 mA - 2700 K	6528.5	52 W	80	19
	102-0351-70	LED-48/48W / 350 mA - 2700 K	6978.7	52 W	70	19
	102-0352	LED-48/48W / 350 mA - 3000 K	6978.7	52 W	80	19
	102-0352-70	LED-48/48W / 350 mA - 3000 K	8104.3	52 W	70	19
	102-0353	LED-48/48W / 350 mA - 4000 K	7654.1	52 W	80	19
	102-0353-70	LED-48/48W / 350 mA - 4000 K	8554.6	52 W	70	19
	102-0362	LED-48/72W / 500 mA - 2200 K	8254.6	77 W	70	19
	102-0363	LED-48/72W / 500 mA - 2700 K	8576.2	77 W	80	19
	102-0363-70	LED-48/72W / 500 mA - 2700 K	9219.4	77 W	70	19
	102-0364	LED-48/72W / 500 mA - 3000 K	9219.4	77 W	80	19
	102-0364-70	LED-48/72W / 500 mA - 3000 K	10505.9	77 W	70	19
	102-0365	LED-48/72W / 500 mA - 4000 K	9862.7	77 W	80	19
	102-0365-70	LED-48/72W / 500 mA - 4000 K	11149.1	77 W	70	19
	102-0374	LED-48/96W / 700 mA - 2200 K	11577.9	105.5 W	70	19
	102-0375	LED-48/96W / 700 mA - 2700 K	11577.9	105.5 W	80	19
	102-0375-70	LED-48/96W / 700 mA - 2700 K	12435.5	105.5 W	70	19
	102-0376	LED-48/96W / 700 mA - 3000 K	12435.5	105.5 W	80	19
	102-0376-70	LED-48/96W / 700 mA - 3000 K	14150.8	105.5 W	70	19
	102-0377	LED-48/96W / 700 mA - 4000 K	13293.2	105.5 W	80	19
	102-0377-70	LED-48/96W / 700 mA - 4000 K	15008.4	105.5 W	70	19
	102-0944	LED-48/144W / 1050 mA - 2200 K	15437.4	154 W	70	19
	102-0945	LED-48/144W / 1050 mA - 2700 K	15437.4	154 W	80	19
	102-0945-70	LED-48/144W / 1050 mA - 2700 K	19348.2	154 W	70	19
	102-0946	LED-48/144W / 1050 mA - 3000 K	16672.4	154 W	80	19
	102-0946-70	LED-48/144W / 1050 mA - 3000 K	20171.5	154 W	70	19
	102-0947	LED-48/144W / 1050 mA - 4000 K	17701.5	154 W	80	19
	102-0947-70	LED-48/144W / 1050 mA - 4000 K	20994.8	154 W	70	19
	102-0194	LED-48/48W / 350 mA - 2200 K	6704.2	52 W	70	19


**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
pedestrian crossing, left-hand traffic [P46L] 	102-0195	LED-48/48W / 350 mA - 2700 K	6704.2	52 W	80	19
	102-0195-70	LED-48/48W / 350 mA - 2700 K	7166.5	52 W	70	19
	102-0196	LED-48/48W / 350 mA - 3000 K	7166.5	52 W	80	19
	102-0196-70	LED-48/48W / 350 mA - 3000 K	8322.4	52 W	70	19
	102-0197	LED-48/48W / 350 mA - 4000 K	7860	52 W	80	19
	102-0197-70	LED-48/48W / 350 mA - 4000 K	8784.8	52 W	70	19
	102-0239	LED-48/72W / 500 mA - 2200 K	8802.4	77 W	70	19
	102-0240	LED-48/72W / 500 mA - 2700 K	9145.3	77 W	80	19
	102-0240-70	LED-48/72W / 500 mA - 2700 K	9831.2	77 W	70	19
	102-0241	LED-48/72W / 500 mA - 3000 K	9831.2	77 W	80	19
	102-0241-70	LED-48/72W / 500 mA - 3000 K	11203	77 W	70	19
	102-0242	LED-48/72W / 500 mA - 4000 K	10517.1	77 W	80	19
	102-0242-70	LED-48/72W / 500 mA - 4000 K	11888.9	77 W	70	19
	102-0284	LED-48/96W / 700 mA - 2200 K	12346.2	105.5 W	70	19
	102-0285	LED-48/96W / 700 mA - 2700 K	12346.2	105.5 W	80	19
	102-0285-70	LED-48/96W / 700 mA - 2700 K	13260.7	105.5 W	70	19
	102-0286	LED-48/96W / 700 mA - 3000 K	13260.7	105.5 W	80	19
	102-0286-70	LED-48/96W / 700 mA - 3000 K	15089.8	105.5 W	80	19
	102-0287	LED-48/96W / 700 mA - 4000 K	14175.3	105.5 W	80	19
	102-0287-70	LED-48/96W / 700 mA - 4000 K	16004.3	105.5 W	70	19
	102-0940	LED-48/144W / 1050 mA - 2200 K	15852.7	154 W	70	19
	102-0941	LED-48/144W / 1050 mA - 2700 K	15852.7	154 W	80	19
	102-0941-70	LED-48/144W / 1050 mA - 2700 K	19868.7	154 W	70	19
	102-0942	LED-48/144W / 1050 mA - 3000 K	17120.9	154 W	80	19
	102-0942-70	LED-48/144W / 1050 mA - 3000 K	20714.2	154 W	70	19
102-0943	LED-48/144W / 1050 mA - 4000 K	18177.8	154 W	80	19	
102-0943-70	LED-48/144W / 1050 mA - 4000 K	21559.7	154 W	70	19	
pedestrian crossing, right-hand traffic [P46R] 	102-0189	LED-48/48W / 350 mA - 2200 K	6640.5	52 W	70	19
	102-0190	LED-48/48W / 350 mA - 2700 K	6640.5	52 W	80	19
	102-0190-70	LED-48/48W / 350 mA - 2700 K	7098.4	52 W	70	19
	102-0191	LED-48/48W / 350 mA - 3000 K	7098.4	52 W	80	19
	102-0191-70	LED-48/48W / 350 mA - 3000 K	8243.3	52 W	70	19
	102-0192	LED-48/48W / 350 mA - 4000 K	7785.4	52 W	80	19


**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026

**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0192-70	LED-48/48W / 350 mA - 4000 K	8701.3	52 W	70	19
	102-0234	LED-48/72W / 500 mA - 2200 K	8678.8	77 W	70	19
	102-0235	LED-48/72W / 500 mA - 2700 K	9016.9	77 W	80	19
	102-0235-70	LED-48/72W / 500 mA - 2700 K	9693.2	77 W	70	19
	102-0236	LED-48/72W / 500 mA - 3000 K	9693.2	77 W	80	19
	102-0236-70	LED-48/72W / 500 mA - 3000 K	11045.8	77 W	70	19
	102-0237	LED-48/72W / 500 mA - 4000 K	10369.5	77 W	80	19
	102-0237-70	LED-48/72W / 500 mA - 4000 K	11722	77 W	70	19
	102-0279	LED-48/96W / 700 mA - 2200 K	12172.9	105.5 W	70	19
	102-0280	LED-48/96W / 700 mA - 2700 K	12172.9	105.5 W	80	19
	102-0280-70	LED-48/96W / 700 mA - 2700 K	13074.6	105.5 W	70	19
	102-0281	LED-48/96W / 700 mA - 3000 K	13074.6	105.5 W	80	19
	102-0281-70	LED-48/96W / 700 mA - 3000 K	14878	105.5 W	70	19
	102-0282	LED-48/96W / 700 mA - 4000 K	13976.3	105.5 W	80	19
	102-0282-70	LED-48/96W / 700 mA - 4000 K	15779.7	105.5 W	70	19
	102-0936	LED-48/144W / 1050 mA - 2200 K	15702	154 W	70	19
	102-0937	LED-48/144W / 1050 mA - 2700 K	15702	154 W	80	19
	102-0937-70	LED-48/144W / 1050 mA - 2700 K	19679.8	154 W	70	19
	102-0938	LED-48/144W / 1050 mA - 3000 K	16958.1	154 W	80	19
	102-0938-70	LED-48/144W / 1050 mA - 3000 K	20517.2	154 W	70	19
	102-0939	LED-48/144W / 1050 mA - 4000 K	18004.9	154 W	80	19
	102-0939-70	LED-48/144W / 1050 mA - 4000 K	21354.7	154 W	70	19
rectangular, side throw [R60] 	102-0169	LED-48/48W / 350 mA - 2200 K	6081.9	52 W	70	19
	102-0170	LED-48/48W / 350 mA - 2700 K	6081.9	52 W	80	19
	102-0170-70	LED-48/48W / 350 mA - 2700 K	6501.4	52 W	70	19
	102-0171	LED-48/48W / 350 mA - 3000 K	6501.4	52 W	80	19
	102-0171-70	LED-48/48W / 350 mA - 3000 K	7550	52 W	70	19
	102-0172	LED-48/48W / 350 mA - 4000 K	7130.5	52 W	80	19
	102-0172-70	LED-48/48W / 350 mA - 4000 K	7969.4	52 W	70	19
	102-0214	LED-48/72W / 500 mA - 2200 K	8423.3	77 W	70	19
	102-0215	LED-48/72W / 500 mA - 2700 K	8751.4	77 W	80	19
	102-0215-70	LED-48/72W / 500 mA - 2700 K	9407.8	77 W	70	19
	102-0216	LED-48/72W / 500 mA - 3000 K	9407.8	77 W	80	19

**WE-EF LIGHTING USA, LLC**


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/07/2026


**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0216-70	LED-48/72W / 500 mA - 3000 K	10720.5	77 W	70	19
	102-0217	LED-48/72W / 500 mA - 4000 K	10064.2	77 W	80	19
	102-0217-70	LED-48/72W / 500 mA - 4000 K	11376.9	77 W	70	19
	102-0259	LED-48/96W / 700 mA - 2200 K	11814.4	105.5 W	70	19
	102-0260	LED-48/96W / 700 mA - 2700 K	11814.4	105.5 W	80	19
	102-0260-70	LED-48/96W / 700 mA - 2700 K	12689.6	105.5 W	70	19
	102-0261	LED-48/96W / 700 mA - 3000 K	12689.6	105.5 W	80	19
	102-0261-70	LED-48/96W / 700 mA - 3000 K	14439.9	105.5 W	70	19
	102-0262	LED-48/96W / 700 mA - 4000 K	13564.7	105.5 W	80	19
	102-0262-70	LED-48/96W / 700 mA - 4000 K	15315	105.5 W	70	19
	102-0920	LED-48/144W / 1050 mA - 2200 K	14519.4	154 W	70	19
	102-0921	LED-48/144W / 1050 mA - 2700 K	14519.4	154 W	80	19
	102-0921-70	LED-48/144W / 1050 mA - 2700 K	18197.6	154 W	70	19
	102-0922	LED-48/144W / 1050 mA - 3000 K	15680.9	154 W	80	19
	102-0922-70	LED-48/144W / 1050 mA - 3000 K	18972	154 W	70	19
	102-0923	LED-48/144W / 1050 mA - 4000 K	16648.9	154 W	80	19
	102-0923-70	LED-48/144W / 1050 mA - 4000 K	19746.3	154 W	70	19
rectangular, side throw [R61]	102-0358	LED-48/48W / 350 mA - 2200 K	6039.9	52 W	70	19
	102-0359	LED-48/48W / 350 mA - 2700 K	6039.9	52 W	80	19
	102-0359-70	LED-48/48W / 350 mA - 2700 K	6456.5	52 W	70	19
	102-0360	LED-48/48W / 350 mA - 3000 K	6456.5	52 W	80	19
	102-0360-70	LED-48/48W / 350 mA - 3000 K	7497.9	52 W	70	19
	102-0361	LED-48/48W / 350 mA - 4000 K	7081.3	52 W	80	19
	102-0361-70	LED-48/48W / 350 mA - 4000 K	7914.4	52 W	70	19
	102-0370	LED-48/72W / 500 mA - 2200 K	7636.8	77 W	70	19
	102-0371	LED-48/72W / 500 mA - 2700 K	7934.4	77 W	80	19
	102-0371-70	LED-48/72W / 500 mA - 2700 K	8529.5	77 W	70	19
	102-0372	LED-48/72W / 500 mA - 3000 K	8529.5	77 W	80	19
	102-0372-70	LED-48/72W / 500 mA - 3000 K	9719.6	77 W	70	19
	102-0373	LED-48/72W / 500 mA - 4000 K	9124.5	77 W	80	19
	102-0373-70	LED-48/72W / 500 mA - 4000 K	10314.7	77 W	70	19
	102-0382	LED-48/96W / 700 mA - 2200 K	10711.4	105.5 W	70	19
	102-0383	LED-48/96W / 700 mA - 2700 K	10711.4	105.5 W	80	19



**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0383-70	LED-48/96W / 700 mA - 2700 K	11504.9	105.5 W	70	19
	102-0384	LED-48/96W / 700 mA - 3000 K	11504.9	105.5 W	80	19
	102-0384-70	LED-48/96W / 700 mA - 3000 K	13091.7	105.5 W	70	19
	102-0385	LED-48/96W / 700 mA - 4000 K	12298.3	105.5 W	80	19
	102-0385-70	LED-48/96W / 700 mA - 4000 K	13885.2	105.5 W	70	19
	102-0952	LED-48/144W / 1050 mA - 2200 K	14282.1	154 W	70	19
	102-0953	LED-48/144W / 1050 mA - 2700 K	14282.1	154 W	80	19
	102-0953-70	LED-48/144W / 1050 mA - 2700 K	17900.2	154 W	70	19
	102-0954	LED-48/144W / 1050 mA - 3000 K	15424.7	154 W	80	19
	102-0954-70	LED-48/144W / 1050 mA - 3000 K	18661.9	154 W	70	19
	102-0955	LED-48/144W / 1050 mA - 4000 K	16376.8	154 W	80	8.6
	102-0955-70	LED-48/144W / 1050 mA - 4000 K	19423.7	154 W	70	8.6
square distribution [Q66]	102-0184	LED-48/48W / 350 mA - 2200 K	6198.8	52 W	70	19
	102-0185	LED-48/48W / 350 mA - 2700 K	6198.8	52 W	80	19
	102-0185-70	LED-48/48W / 350 mA - 2700 K	6626.3	52 W	70	19
	102-0186	LED-48/48W / 350 mA - 3000 K	6626.3	52 W	80	19
	102-0186-70	LED-48/48W / 350 mA - 3000 K	7695.1	52 W	70	19
	102-0187	LED-48/48W / 350 mA - 4000 K	7267.6	52 W	80	19
	102-0187-70	LED-48/48W / 350 mA - 4000 K	8122.6	52 W	70	19
	102-0229	LED-48/72W / 500 mA - 2200 K	8252.2	77 W	70	19
	102-0230	LED-48/72W / 500 mA - 2700 K	8573.7	77 W	80	19
	102-0230-70	LED-48/72W / 500 mA - 2700 K	9216.7	77 W	70	19
	102-0231	LED-48/72W / 500 mA - 3000 K	9216.7	77 W	80	19
	102-0231-70	LED-48/72W / 500 mA - 3000 K	10502.8	77 W	70	19
	102-0232	LED-48/72W / 500 mA - 4000 K	9859.8	77 W	80	19
	102-0232-70	LED-48/72W / 500 mA - 4000 K	11145.8	77 W	70	19
	102-0274	LED-48/96W / 700 mA - 2200 K	11574.5	105.5 W	70	19
	102-0275	LED-48/96W / 700 mA - 2700 K	11574.5	105.5 W	80	19
	102-0275-70	LED-48/96W / 700 mA - 2700 K	12431.9	105.5 W	70	19
	102-0276	LED-48/96W / 700 mA - 3000 K	12431.9	105.5 W	80	19
	102-0276-70	LED-48/96W / 700 mA - 3000 K	14146.6	105.5 W	70	19
	102-0277	LED-48/96W / 700 mA - 4000 K	13289.2	105.5 W	80	19
	102-0277-70	LED-48/96W / 700 mA - 4000 K	15004	105.5 W	70	19



**Street and Area Lighting**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	102-0932	LED-48/144W / 1050 mA - 2200 K	14657.9	154 W	70	19
	102-0933	LED-48/144W / 1050 mA - 2700 K	14657.9	154 W	80	19
	102-0933-70	LED-48/144W / 1050 mA - 2700 K	18371.3	154 W	70	19
	102-0934	LED-48/144W / 1050 mA - 3000 K	15830.6	154 W	80	19
	102-0934-70	LED-48/144W / 1050 mA - 3000 K	19153	154 W	70	19
	102-0935	LED-48/144W / 1050 mA - 4000 K	16807.8	154 W	80	19
	102-0935-70	LED-48/144W / 1050 mA - 4000 K	19934.8	154 W	70	19


**Mounting Accessories**

**Bird deterrent**

---

Description	Part ID
Bird deterrent BD	430-0015


---



**Street and Area Lighting**


**Adaptor**

Description	Part ID
Adaptor AFL100	102-0392




**Wall and pole brackets RE**

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (lb)
RE2-540 Pole bracket, double	111-0043	7.87			3 x 5	21.65		11.68

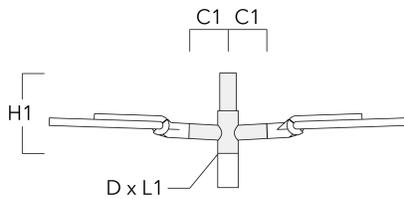


**Street and Area Lighting**

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (lb)
RE0-540 Wall bracket	111-0084	7.09	9.06	7.68			0.47	7.05

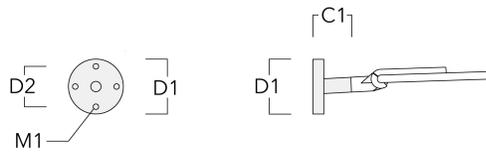


RE1-540 Pole bracket, single	111-0042	200			3 x 5	500		4.60
------------------------------	----------	-----	--	--	-------	-----	--	------




**Street and Area Lighting**

**Pole brackets RF**

Description	Part ID	C1	D × L1	H1	Weight (lb)
RF2-540 Pole bracket, double	111-0047	7.87	3 x 3	7.87	7.28

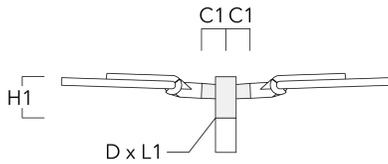


RF1-540 Pole bracket, single	111-0046	200	3 x 3	200	2.60
------------------------------	----------	-----	-------	-----	------




**Street and Area Lighting**

**Wall and pole brackets RX**

Description	Part ID	C1	D1	D2	D x L1	H1	H2	M1	M2	Weight (lb)
RX1-540 Pole bracket, single	111-0054	39.37			2.99 x 3.15	21.65				14.99

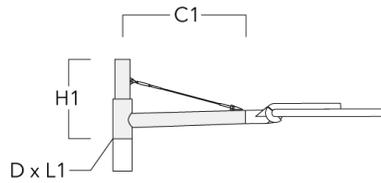


RX2-540 Pole bracket, double	111-0055	39.37			2.99 x 3.15	21.65				21.38
------------------------------	----------	-------	--	--	-------------	-------	--	--	--	-------

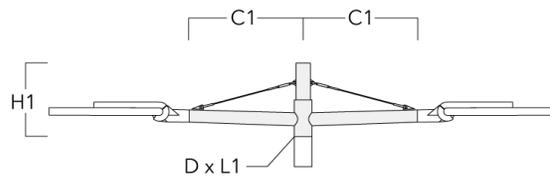

**Street and Area Lighting**

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (lb)
RX0-540 Wall bracket	111-0086	39.37	5.51	3.94		17.72	15.16	1.18	0.47	11.46

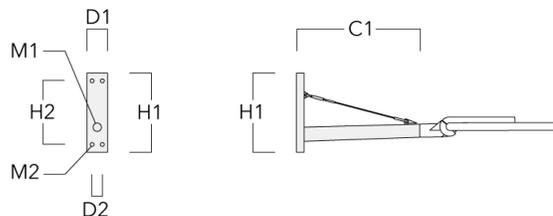

**Optical Accessories**

**Backlight shield**

Description	Part ID	Additional information
LS180	430-0029	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S61][S65][S66][S70][S71][R60][R61][P66][Q66][A61] lenses. Must be specified at time of ordering.

