

### Description

Wild-Light. IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflective flat safety glass cover, hinged. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Wild-Light with Advanced or Motion available on request, must be specified at time of ordering. For further details and available variants see below under additional information - Wild-Light Presentation. The luminaire is factory-sealed and does not need to be opened during installation. Can be used as post top or side entry version. Specification at time of order is recommended.

Spigot Ø 76 x 100 mm. Spigot Ø 60 x 100 mm or 42 x 100 mm optional available. Must be indicated during order placement.

Contact WE-EF direct or your local WE-EF sales representative for an individual solution designed to precisely meet your needs.

### IMPORTANT

Photometric data legend (for ies-data):

## Pole mounted

---

Part ID (channel I+II - both colour temperatures 1850K  
(PC Amber) + 2200K / 2200K + 3000K)

Part ID\_1 (channel I - lower colour temperature 1850K  
(PC Amber) / 2200K only)

Part ID\_2 (channel II - upper colour temperature 2200K /  
3000K only)

Photometric data legend (for ldt-data):

Part ID (channel I+II - both colour temperatures 1850K  
(PC Amber) + 2200K / 2200K + 3000K)

Part ID (channel I - lower colour temperature 1850K (PC  
Amber) / 2200K only)

Part ID (channel II - upper colour temperature 2200K /  
3000K only)

Photometric files (IES, LDT) for light distributions [S61]  
[S65] [S66] [S70] [R60] [R61] [P66] [Q66] [A61] with  
Backlight Shield on request.

**Pole mounted**

---

**Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflective safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE+Primer
Windage	0.146 m <sup>2</sup>

---

**Electrical description**

---

Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	In-pole surge protection SP10 device supplied. Please refer to WE-EF installation instructions for details. Use suffix +A for Integral surge protection.

---

**Additional information**

---

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

---

**Pole mounted**

**Options**

**Light distribution**



asymmetric, side throw [S61]



asymmetric, forward throw [A61]



asymmetric, side throw [S65]



asymmetric, side throw [S70]



rectangular, side throw [R60]



pedestrian/bicycle lane [P66]



square distribution [Q66]



pedestrian crossing, right-hand traffic [P46R]



pedestrian crossing, left-hand traffic [P46L]



asymmetric, side throw [S66]



asymmetric, side throw [S71]



rectangular, side throw [R61]

**Colour temperature**

2200 K / 3000 K

True Amber / 2200 K



3000 K



2200 K

True Amber

PC Amber / 3000 K

**Nominal Watt**

40 W

36 W





32 W

8 W




0 W

## Pole mounted




## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A61] 	102-0146	LED-8-16/8W-32W/2200K-3000K	4978.7	44.5 W	70/80	7.00
	102-0146_1	LED-8/8W/2200K	995.7	9.5 W	70	7.00
	102-0146_2	LED-16/32W/3000K	3983	35 W	80	7.00
	102-0147	LED-8-16/8W-32W/True Amber-2200K	4051.7	43 W	NA/70	7.00
	102-0147_1	LED-8/8W/True Amber	343.4	8 W	NA	7.00
	102-0147_2	LED-16/32W/2200K	3708.3	35 W	70	7.00
	102-0403	LED-8-16/8W-32W/PC Amber-3000K	4738.4	44.5 W	60/80	7.00
	102-0403_1	LED-8/8W/PC Amber	755.4	9.5 W	60	7.00
	102-0403_2	LED-16/32W/3000K	3983	35 W	80	7.00
asymmetric, side throw [S61] 	102-0136	LED-8-16/8W-32W/2200K-3000K	5253.6	44.5 W	70/80	7.00
	102-0136_1	LED-8/8W/2200K	1050.7	9.5 W	70	7.00
	102-0136_2	LED-16/32W/3000K	4202.9	35 W	80	7.00
	102-0137	LED-8-16/8W-32W/True Amber-2200K	4275.4	43 W	NA/70	7.00
	102-0137_1	LED-8/8W/True Amber	362.3	8 W	NA	7.00
	102-0137_2	LED-16/32W/2200K	3913	35 W	70	7.00
	102-0399	LED-8-16/8W-32W/PC Amber-3000K	5000	44.5 W	60/80	7.00
	102-0399_1	LED-8/8W/PC Amber	797.1	9.5 W	60	7.00
	102-0399_2	LED-16/32W/3000K	4202.9	35 W	80	7.00
asymmetric, side throw [S65] 	102-0138	LED-8-16/8W-32W/2200K-3000K	5240.4	44.5 W	70/80	7.00
	102-0138_1	LED-8/8W/2200K	1048.1	9.5 W	70	7.00
	102-0138_2	LED-16/32W/3000K	4192.3	35 W	80	7.00
	102-0139	LED-8-16/8W-32W/True Amber-2200K	4264.6	43 W	NA/70	7.00
	102-0139_1	LED-8/8W/True Amber	361.4	8 W	NA	7.00
	102-0139_2	LED-16/32W/2200K	3903.2	35 W	70	7.00
	102-0400	LED-8-16/8W-32W/PC Amber-3000K	4987.4	44.5 W	60/80	7.00
	102-0400_1	LED-8/8W/PC Amber	802.2	9.5 W	60	7.00
	102-0400_2	LED-16/32W/3000K	4192.3	35 W	80	7.00
asymmetric, side throw [S66] 	102-0344	LED-8-16/8W-32W/2200K-3000K	5205.8	44.5 W	70/80	7.00
	102-0344_1	LED-8/8W/2200K	1041.2	9.5 W	70	7.00
	102-0344_2	LED-16/32W/3000K	4164.6	35 W	80	7.00
	102-0345	LED-8-16/8W-32W/True Amber-2200K	4236.4	43 W	NA/70	7.00
	102-0345_1	LED-8/8W/True Amber	359	8 W	NA	7.00
	102-0345_2	LED-16/32W/2200K	3877.4	35 W	70	7.00
	102-0407	LED-8-16/8W-32W/PC Amber-3000K	4954.5	44.5 W	60/80	7.00

## Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0407_1	LED-8/8W/PC Amber	789.8	9.5 W	60	7.00
	102-0407_2	LED-16/32W/3000K	4164.6	35 W	80	7.00
asymmetric, side throw [S70]	102-0140	LED-8-16/8W-32W/2200K-3000K	5126.5	44.5 W	70/80	7.00
	102-0140_1	LED-8/8W/2200K	1025.3	9.5 W	70	7.00
	102-0140_2	LED-16/32W/3000K	4101.2	35 W	80	7.00
	102-0141	LED-8-16/8W-32W/True Amber-2200K	4171.9	43 W	NA/70	7.00
	102-0141_1	LED-8/8W/True Amber	353.6	8 W	NA	7.00
	102-0141_2	LED-16/32W/2200K	3818.4	35 W	70	7.00
	102-0307	LED-8-16/8W-32W/PC Amber-3000K	4879	44.5 W	60/80	7.00
	102-0307_1	LED-8/8W/PC Amber	777.8	9.5 W	60	7.00
	102-0307_2	LED-16/32W/3000K	4101.2	35 W	80	7.00
asymmetric, side throw [S71]	102-0346	LED-8-16/8W-32W/2200K-3000K	4716.2	44.5 W	70/80	7.00
	102-0346_1	LED-8/8W/2200K	943.2	9.5 W	70	7.00
	102-0346_2	LED-16/32W/3000K	3773	35 W	80	7.00
	102-0347	LED-8-16/8W-32W/True Amber-2200K	3838	43 W	NA/70	7.00
	102-0347_1	LED-8/8W/True Amber	325.3	8 W	NA	7.00
	102-0347_2	LED-16/32W/2200K	3512.8	35 W	70	7.00
	102-0408	LED-8-16/8W-32W/PC Amber-3000K	4488.5	44.5 W	60/80	7.00
	102-0408_1	LED-8/8W/PC Amber	715.6	9.5 W	60	7.00
	102-0408_2	LED-16/32W/3000K	3773	35 W	80	7.00
pedestrian crossing, left-hand traffic [P46L]	102-0152	LED-8-16/8W-32W/2200K-3000K	5525.3	44.5 W	70/80	7.00
	102-0152_1	LED-8/8W/2200K	1105.1	9.5 W	70	7.00
	102-0152_2	LED-16/32W/3000K	4420.2	35 W	80	7.00
	102-0153	LED-8-16/8W-32W/True Amber-2200K	4496.5	43 W	NA/70	7.00
	102-0153_1	LED-8/8W/True Amber	381.1	8 W	NA	7.00
	102-0153_2	LED-16/32W/2200K	4115.4	35 W	70	7.00
	102-0406	LED-8-16/8W-32W/PC Amber-3000K	5258.6	44.5 W	60/80	7.00
	102-0406_1	LED-8/8W/PC Amber	838.3	9.5 W	60	7.00
	102-0406_2	LED-16/32W/3000K	4420.2	35 W	80	7.00
pedestrian crossing, right-hand traffic [P46R]	102-0150	LED-8-16/8W-32W/2200K-3000K	5340.3	44.5 W	70/80	7.00
	102-0150_1	LED-8/8W/2200K	1068.1	9.5 W	70	7.00
	102-0150_2	LED-16/32W/3000K	4272.2	35 W	80	7.00
	102-0151	LED-8-16/8W-32W/True Amber-2200K	4345.9	43 W	NA/70	7.00
	102-0151_1	LED-8/8W/True Amber	368.3	8 W	NA	7.00
	102-0151_2	LED-16/32W/2200K	3977.6	35 W	70	7.00
	102-0405	LED-8-16/8W-32W/PC Amber-3000K	5082.5	44.5 W	60/80	7.00

## Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0405_1	LED-8/8W/PC Amber	810.2	9.5 W	60	7.00
	102-0405_2	LED-16/32W/3000K	4272.2	35 W	80	7.00
pedestrian/bicycle lane [P66] 	102-0144	LED-8-16/8W-32W/2200K-3000K	4856.5	44.5 W	70/80	7.00
	102-0144_1	LED-8/8W/2200K	971.3	9.5 W	70	7.00
	102-0144_2	LED-16/32W/3000K	3885.2	35 W	80	7.00
	102-0145	LED-8-16/8W-32W/True Amber-2200K	3952.2	43 W	NA/70	7.00
	102-0145_1	LED-8/8W/True Amber	334.9	8 W	NA	7.00
	102-0145_2	LED-16/32W/2200K	3617.3	35 W	70	7.00
	102-0402	LED-8-16/8W-32W/PC Amber-3000K	4622.1	44.5 W	60/80	7.00
	102-0402_1	LED-8/8W/PC Amber	736.9	9.5 W	60	7.00
	102-0402_2	LED-16/32W/3000K	3885.2	35 W	80	7.00
	rectangular, side throw [R60] 	102-0142	LED-8-16/8W-32W/2200K-3000K	5287.3	44.5 W	70/80
102-0142_1		LED-8/8W/2200K	1057.5	9.5 W	70	7.00
102-0142_2		LED-16/32W/3000K	4229.9	35 W	80	7.00
102-0143		LED-8-16/8W-32W/True Amber-2200K	4302.8	43 W	NA/70	7.00
102-0143_1		LED-8/8W/True Amber	364.6	8 W	NA	7.00
102-0143_2		LED-16/32W/2200K	3938.1	35 W	70	7.00
102-0401		LED-8-16/8W-32W/PC Amber-3000K	5032.1	44.5 W	60/80	7.00
102-0401_1		LED-8/8W/PC Amber	802.2	9.5 W	60	7.00
102-0401_2		LED-16/32W/3000K	4229.9	35 W	80	7.00
rectangular, side throw [R61] 		102-0348	LED-8-16/8W-32W/2200K-3000K	4734.9	44.5 W	70/80
	102-0348_1	LED-8/8W/2200K	947	9.5 W	70	7.00
	102-0348_2	LED-16/32W/3000K	3787.9	35 W	80	7.00
	102-0409	LED-8-16/8W-32W/PC Amber-3000K	4506.3	44.5 W	60/80	7.00
	102-0409_1	LED-8/8W/PC Amber	718.4	9.5 W	60	7.00
	102-0409_2	LED-16/32W/3000K	3787.9	35 W	80	7.00
square distribution [Q66] 	102-0148	LED-8-16/8W-32W/2200K-3000K	4834.1	44.5 W	70/80	7.00
	102-0148_1	LED-8/8W/2200K	966.8	9.5 W	70	7.00
	102-0148_2	LED-16/32W/3000K	3867.2	35 W	80	7.00
	102-0149	LED-8-16/8W-32W/True Amber-2200K	3933.9	43 W	NA/70	7.00
	102-0149_1	LED-8/8W/True Amber	333.4	8 W	NA	7.00
	102-0149_2	LED-16/32W/2200K	3600.5	35 W	70	7.00
	102-0404	LED-8-16/8W-32W/PC Amber-3000K	4600.7	44.5 W	60/80	7.00
	102-0404_1	LED-8/8W/PC Amber	733.4	9.5 W	60	7.00
102-0404_2	LED-16/32W/3000K	3867.2	35 W	80	7.00	


## Pole mounted

---

### Optical Accessories

#### Backlight shield

Description	Part ID	Additional information
Backlight shield LS180	102-0959-24LED	Glare Shield for backlight spill. Suitable for [S65][R60] lenses. Glare Shield factory-installed or available as retrofit kit. Must be specified at time of ordering.



**Pole mounted**

---

**Control**

**R2C Ready to Connect**

---

Description	Part ID
R2C Ready to Connect (top)	430-0019
R2C Ready to Connect (below)	430-0027
R2C Ready to Connect (top and below)	430-0032

---

**Pole mounted**


---

**Mounting Accessories****Bird deterrent**

---

Description	Part ID
Bird deterrent BD	430-0015

---

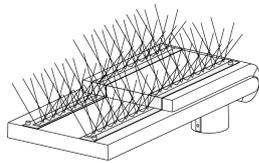


---

**Adaptor**

---

Description	Part ID
Adaptor AFL100	102-0392


---




**Pole mounted**

**Wall and pole brackets RE**

Description	Part ID	Additional information	C1	D1	D2	D × L1	H1	M1	Weight (kg)
RE2-540 Pole bracket, double	111-0043		200			76 x 130	550		5.30

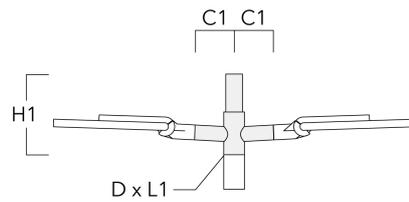


RE0-540 Wall bracket	111-0084		180	230	195			12	3.20
----------------------	----------	--	-----	-----	-----	--	--	----	------

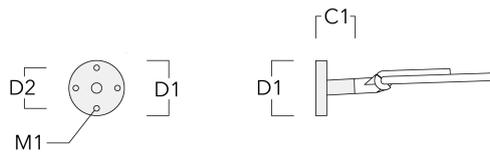


**Pole mounted**

Description	Part ID	Additional information	C1	D1	D2	D × L1	H1	M1	Weight (kg)
Pole bracket RE1, single for mounting on AML-A poles	111-9022	Mounting brackets. Marine-grade aluminium alloy. 5CE superior corrosion protection including PCS hardware.	320			76 x 76	550		6.10

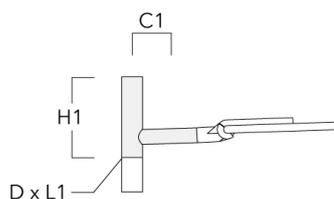


Pole bracket RE2, double for mounting on AML-A poles	111-9023	Mounting brackets. Marine-grade aluminium alloy. 5CE superior corrosion protection including PCS hardware.	320			76 x 76	550		7.20
--	----------	--	-----	--	--	---------	-----	--	------

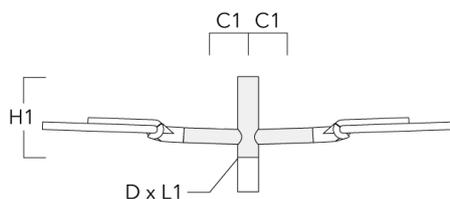


**Pole mounted**

Description	Part ID	Additional information	C1	D1	D2	D × L1	H1	M1	Weight (kg)
RE1-540 Pole bracket, single	111-0042		200			76 x 130	500		4.60

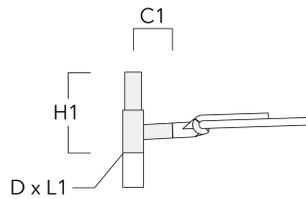


**Pole brackets RF**

Description	Part ID	C1	D × L1	H1	Weight (kg)
RF2-540 Pole bracket, double	111-0047	200	76 x 80	200	3.30

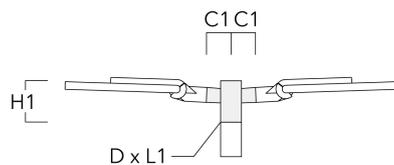


**Pole mounted**

Description	Part ID	C1	D × L1	H1	Weight (kg)
RF1-540 Pole bracket, single	111-0046	200	76 x 80	200	2.60

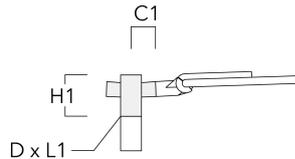


**Wall and pole brackets RX**

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX1-540 Pole bracket, single	111-0054	1000			76 x 130	550				6.8

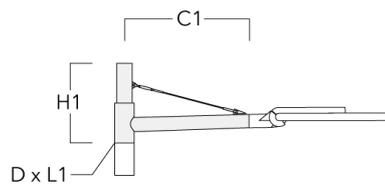

## Pole mounted

Description	Part ID	C1	D1	D2	D x L1	H1	H2	M1	M2	Weight (kg)
RX2-540 Pole bracket, double	111-0055	1000			76 x 130	550				9.70

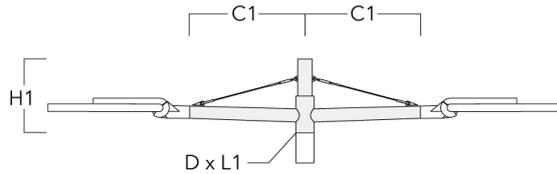

RX0-540 Wall bracket	111-0086	1000	140	100		450	385	30	12	5.20
----------------------	----------	------	-----	-----	--	-----	-----	----	----	------

