
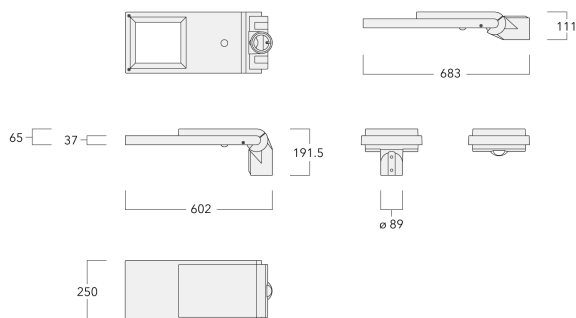


AFL120-WL LED

Pole mounted

we-ef

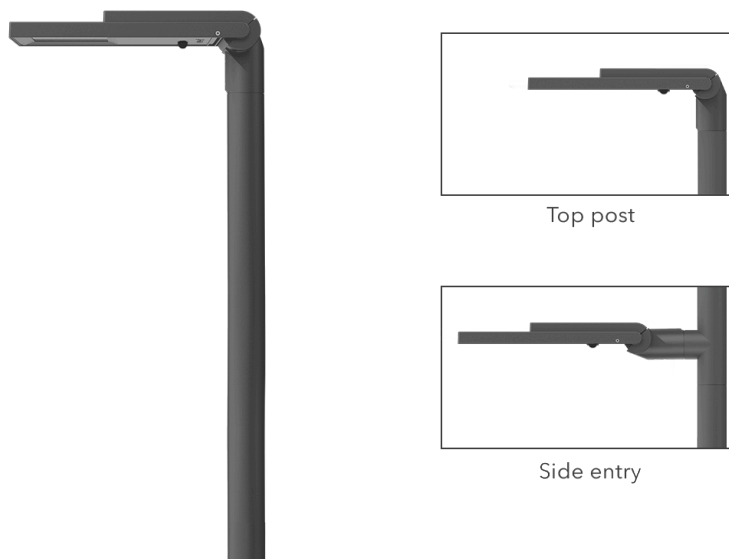

Description

Wild-Light. IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflective flat safety glass cover, hinged. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. DALI interface. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Suitable for using as post top or side entry version. Recommend to be specified at time of ordering.

Optional spigot adaptor Ø 60 x 100 mm or 42 x 100 mm available; refer to accessory listings.

For other colour configurations available on request.





WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/10/2024

Pole mounted**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflective safety glass lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.146 m ²

Electrical description

Driver / Ballast	Integral electronic converter with DALI interface
Power factor	> 0.9
Surge protection	6/6kV, optional 10kV













Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------



Pole mounted

Options

Light distribution

	asymmetric, side throw [S65]
	asymmetric, side throw [S61]
	asymmetric, side throw [S66]
	asymmetric, side throw [S71]
	rectangular, side throw [R61]
	pedestrian/bicycle lane [P66]
	asymmetric, forward throw [A61]
	square distribution [Q66]
	pedestrian crossing, right-hand traffic [P46R]
	pedestrian crossing, left-hand traffic [P46L]
	rectangular, side throw [R60]
	asymmetric, side throw [S70]

Colour temperature

	2200 K / 3000 K	40 W
		36 W
	True Amber / 2200 K	0 W
		8 W
	3000 K	32 W
	2200 K	
	True Amber	
	PC Amber / 3000 K	

Nominal Watt






Pole mounted

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A61]	102-0403	LED-8-16/8W-32W/PC Amber-3000K	4738.4	44.5 W	60/80	7.00
asymmetric, side throw [S61]	102-0399	LED-8-16/8W-32W/PC Amber-3000K	5000	44.5 W	60/80	7.00
asymmetric, side throw [S65]	102-0138	LED-8-16/8W-32W/2200K-3000K	5240.4	44.5 W	70/80	7.00
	102-0138_1	LED-8/8W/2200K	1048.1	9.5 W	70	7.00
	102-0138_2	LED-16/32W/3000K	4192.3	35 W	80	7.00
	102-0139	LED-8-16/8W-32W/True Amber-2200K	4192.3	43 W	NA/70	7.00
	102-0139_1	LED-8/8W/True Amber	289.1	8 W	NA	7.00
	102-0139_2	LED-16/32W/2200K	3903.2	35 W	70	7.00
	102-0400	LED-8-16/8W-32W/PC Amber-3000K	4987.4	44.5 W	60/80	7.00
	102-0400_1	LED-8/8W/PC Amber	802.2	9.5 W	60	7.00
	102-0403_2	LED-16/32W/3000K	3983	35 W	80	7.00
asymmetric, side throw [S66]	102-0407	LED-8-16/8W-32W/PC Amber-3000K	4954.5	44.5 W	60/80	7.00
asymmetric, side throw [S70]	102-0307	LED-8-16/8W-32W/PC Amber-3000K	4879	44.5 W	60/80	7.00
	102-0307_1	LED-8/8W/PC Amber	777.8	9.5 W	60	7.00
	102-0307_2	LED-16/32W/3000K	4101.2	35 W	80	7.00
asymmetric, side throw [S71]	102-0408	LED-8-16/8W-32W/PC Amber-3000K	4488.5	44.5 W	60/80	7.00
pedestrian crossing, left-hand traffic [P46L]	102-0406	LED-8-16/8W-32W/PC Amber-3000K	5258.6	44.5 W	60/80	7.00

AFL120-WL LED

Pole mounted


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	102-0405	LED-8-16/8W-32W/PC Amber-3000K	5082.5	44.5 W	60/80	7.00
pedestrian crossing, right-hand traffic [P46R]						
	102-0402	LED-8-16/8W-32W/PC Amber-3000K	4622.1	44.5 W	60/80	7.00
pedestrian/bicycle lane [P66]						
	102-0401	LED-8-16/8W-32W/PC Amber-3000K	5032.1	44.5 W	60/80	7.00
rectangular, side throw [R60]						
	102-0403	LED-8-16/8W-32W/PC Amber-3000K	4738.4	44.5 W	60/80	7.00
	102-0403_1	LED-8/8W/PC Amber	755.4	9.5 W	60	7.00
	102-0409	LED-8-16/8W-32W/PC Amber-3000K	4506.3	44.5 W	60/80	7.00
rectangular, side throw [R61]						
	102-0404	LED-8-16/8W-32W/PC Amber-3000K	4600.7	44.5 W	60/80	7.00
square distribution [Q66]						

Pole mounted


Optical Accessories

Backlight shield

Description	Part ID	Additional information
Backlight shield LS180	102-0959-24LED	Glare Shield for backlight spill. Suitable for [S65] [R60] lenses. Glare Shield factory-installed or available as retrofit kit. Must be specified at time of ordering.



Backlight shield LS180	102-0395-24LED	Glare Shield for backlight spill. Suitable for [S61], [S66], [R61], [P66] [Q66], [A61] lenses. Glare Shield factory-installed or available as retrofit kit. Must be specified at time of ordering.
------------------------	----------------	---



Pole mounted**Control****R2C Ready to Connect**

Description	Part ID
R2C Ready to Connect (top)	430-0019
R2C Ready to Connect (below)	430-0027
R2C Ready to Connect (top and below)	430-0032

Wild-Light Eco Step Dim® Advanced


Description	Part ID	Additional information
Wild-Light Eco Step Dim® Advanced	430-0034	<p>Fully automatic independent dimming pre-set, without additional installation effort, Example: Starting the night with warm white (3000 K from 20:00 to 22:00), reduced to biodiversity friendly in the heart of the night (2200 K from 22:00 to 06:00), and returning back to warm white in the early morning (3000 K from 06:00 to 07:00).</p> <p>This is the easiest to implement solution to create a nature-friendly lighting scenario, as no additional installations or external controls are needed. All pre-settings are made in the two LED drivers. The dimming values are programmed into the driver during the production of the luminaires. An optional link with sunrise and sunset times can mean additional optimisation. A customer-specific configuration is possible.</p> <p>The settings can be changed directly on the LED driver at any time (NFC). The necessary tool is standardised and can also be obtained from WE-EF as an optional extra.</p>

Pole mounted

Mounting Accessories


Bird deterrent

Description	Part ID
Bird deterrent BD	430-0015



Adaptor

Description	Part ID
Adaptor AFL100	102-0392



Wall and pole brackets RE

WE-EF LIGHTING (Thailand) Co., Ltd.


57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>


Subject to technical changes and errors. - Generated on 23/10/2024

Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)
Pole bracket RE2-540, double	111-0043	200			76 x 130	550		5.30

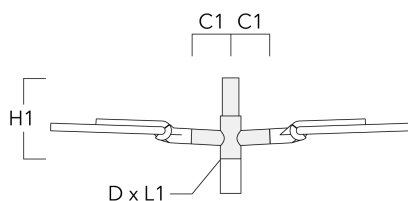


Wall bracket RE0-540	111-0084	180	230	195		12		3.20
----------------------	----------	-----	-----	-----	--	----	--	------

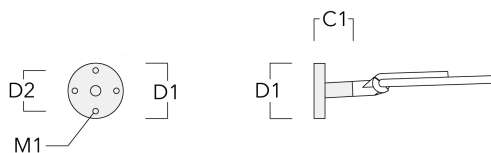


Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)
RE1-540 Pole bracket, single	111-0042	200			76 x 130	500		4.60

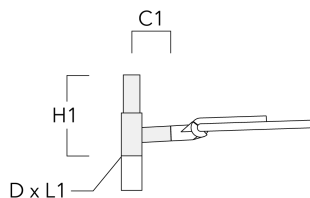


Pole brackets RF

Description	Part ID	C1	D × L1	H1	Weight (kg)
Pole bracket RF2-540, double	111-0047	200	76 x 80	200	3.30

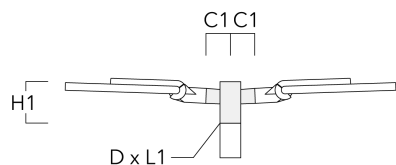


Pole mounted

Description	Part ID	C1	D × L1	H1	Weight (kg)
RF1-540 Pole bracket, single	111-0046	200	76 x 80	200	2.60

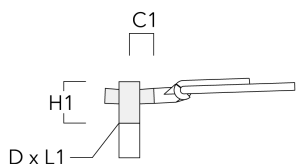


Wall and pole brackets RX

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX1-540 Pole bracket, single	111-0054	1000			76 x 130	550				6.8

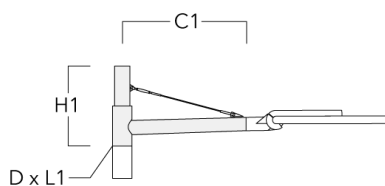


Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX2-540 Pole bracket, double	111-0055	1000			76 x 130	550				9.70

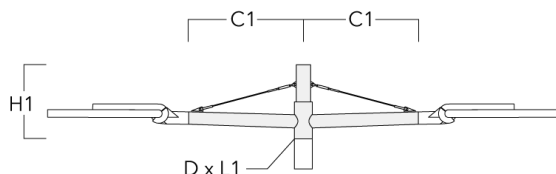

RX0-540 Wall bracket	111-0086	1000	140	100		450	385	30	12	5.20
----------------------	----------	------	-----	-----	--	-----	-----	----	----	------

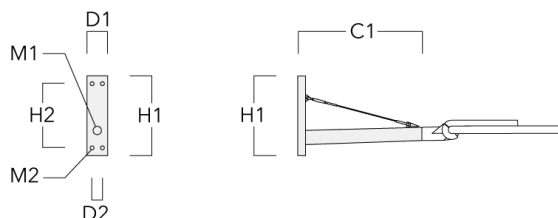

AFL120-WL LED

Pole mounted

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn

Phone: +66 2 738 96 20

Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors.

Generated on 23/10/2024