

Description

Wild-Light. IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflecting flat safety glass cover, hinged. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Wild-Light with Advanced or Motion available on request, must be specified at time of ordering. For further details and available variants see below under additional information - Wild-Light Presentation. The luminaire is factory-sealed and does not need to be opened during installation. Can be used as post top or side entry version. Specification at time of order is recommended.

Spigot Ø 76 x 100 mm. Spigot Ø 60 x 100 mm or 42 x 100 mm optional available. Must be indicated during order placement.

Contact WE-EF direct or your local WE-EF sales representative for an individual solution designed to precisely meet your needs.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
 customersupport.usa@we-ef.com - <https://we-ef.com/us>
 Subject to technical changes and errors. - Generated on 11/23/2024

Street and Area Lighting

IMPORTANT

Photometric data legend (for ies-data):

Part ID (channel I+II - both colour temperatures 1850K (True Amber) + 2200K / 2200K + 3000K)

Part ID_1 (channel I - lower colour temperature 1850K (True Amber) / 2200K only)

Part ID_2 (channel II - upper colour temperature 2200K / 3000K only)

Photometric data legend (for ldt-data):

Part ID (channel I+II - both colour temperatures 1850K (True Amber) + 2200K / 2200K + 3000K)

Part ID (channel I - lower colour temperature 1850K (True Amber) / 2200K only)

Part ID (channel II - upper colour temperature 2200K / 3000K only)





Photometric files (IES, LDT) for light distributions [S61] [S65] [S66] [S70] [R60] [R61] [P66] [Q66] [A61] with Backlight Shield on request.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Specifications**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflective safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.1956 m ²

Electrical description

Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	6/6kV, optional 10kV

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
----------	----------------------------

AFL130-WL LED

Street and Area Lighting

Options

Light distribution



[S61] Type III Short



[S65] Type III Medium



[S70] Type II Short



rectangular, side throw [R60]



[P66] Type II Medium



[A61] Type IV Very Short



square distribution [Q66]



pedestrian crossing, right-hand traffic [P46R]



pedestrian crossing, left-hand traffic [P46L]



asymmetric, side throw beam [S66]



asymmetric, side throw [S71]



rectangular, side throw [R61]

Color temperature

True Amber / 2200 K

True Amber

2200 K

PC Amber / 3000 K

PC Amber

3000 K

Nominal Watt

24 W

96 W

0 W

16 W

80 W

64 W






WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
[A61] Type IV Very Short 	102-0300	LED-16-32/16W-64W/True Amber-2200K	8459.1	83 W	NA/70	19
	102-0300_1	LED-16/16W/True Amber	583.4	15 W	NA	19
	102-0300_2	LED-32/64W/2200K	7875.7	68 W	70	19
	102-0415	LED-8-40/16W-80W/PC Amber-3000K	12105.2	104 W	60/80	8.60
	102-0415_1	LED-8/16W/PC Amber	1531.4	18 W	60	8.60
	102-0415_2	LED-40/80W/3000K	10573.9	86 W	80	8.60
[P66] Type II Medium 	102-0298	LED-16-32/16W-64W/True Amber-2200K	8177.9	83 W	NA/70	19
	102-0298_1	LED-16/16W/True Amber	564	15 W	NA	19
	102-0298_2	LED-32/64W/2200K	7613.9	68 W	70	19
	102-0414	LED-8-40/16W-80W/PC Amber-3000K	11702.9	104 W	60/80	8.60
	102-0414_1	LED-8/16W/PC Amber	1480.5	18 W	60	8.60
	102-0414_2	LED-40/80W/3000K	1480.5	18 W	80	8.60
[S61] Type III Short 	102-0290	LED-16-32/16W-64W/True Amber-2200K	8675.3	83 W	NA/70	19
	102-0290_1	LED-16/16W/True Amber	598.3	15 W	NA	19
	102-0290_2	LED-32/64W/2200K	8077	68 W	70	19
	102-0410	LED-8-40/16W-80W/PC Amber-3000K	12414.6	104 W	60/80	8.60
	102-0410_1	LED-8/16W/PC Amber	1570.5	18 W	60	8.60
	102-0410_2	LED-40/80W/3000K	10844.1	86 W	80	8.60
[S65] Type III Medium 	102-0292	LED-16-32/16W-64W/True Amber-2200K	8482.4	83 W	NA/70	19
	102-0292_1	LED-16/16W/True Amber	585	15 W	NA	19
	102-0292_2	LED-32/64W/2200K	7897.5	68 W	70	19
	102-0411	LED-8-40/16W-80W/PC Amber-3000K	12138.7	104 W	60/80	19
	102-0411_1	LED-8/16W/PC Amber	1535.6	18 W	60	19
	102-0411_2	LED-40/80W/3000K	10603.1	86 W	80	19
[S70] Type II Short 	102-0294	LED-16-32/16W-64W/True Amber-2200K	8579.5	83 W	NA/70	19
	102-0294_1	LED-16/16W/True Amber	591.7	15 W	NA	19
	102-0294_2	LED-32/64W/2200K	7987.8	68 W	70	19
	102-0412	LED-8-40/16W-80W/PC Amber-3000K	12277.5	104 W	60/80	19
	102-0412_1	LED-8-40/16W-80W/PC Amber-3000K	1553.2	18 W	60/80	19
	102-0412_2	LED-40/80W/3000K	10724.3	86 W	80	19
asymmetric, side throw [S71]	102-0389	LED-16-32/16W-64W/True Amber-2200K	7651.4	83 W	NA/70	19
	102-0389_1	LED-16/16W/True Amber	527.7	15 W	NA	19

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Street and Area Lighting

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	102-0389_2	LED-32/64W/2200K	7123.7	68 W	70	19
	102-0420	LED-8-40/16W-80W/PC Amber-3000K	10949.4	104 W	60/80	8.60
	102-0420_1	LED-8/16W/PC Amber	1385.2	18 W	60	8.60
	102-0420_2	LED-40/80W/3000K	9564.2	86 W	80	8.60
asymmetric, side throw beam [S66]	102-0387	LED-16-32/16W-64W/True Amber-2200K	8290.4	83 W	NA/70	19
	102-0387_1	LED-16/16W/True Amber	571.7	15 W	NA	19
	102-0387_2	LED-32/64W/2200K	7718.6	68 W	70	19
	102-0419	LED-8-40/16W-80W/PC Amber-3000K	11863.8	104 W	60/80	8.60
	102-0419_1	LED-8/16W/PC Amber	1500.8	18 W	60	8.60
	102-0419_2	LED-40/80W/3000K	10362.9	86 W	80	8.60
pedestrian crossing, left-hand traffic [P46L]	102-0306	LED-16-32/16W-64W/True Amber-2200K	8840.5	83 W	NA/70	19
	102-0306_1	LED-16/16W/True Amber	609.7	15 W	NA	19
	102-0306_2	LED-32/64W/2200K	8230.8	68 W	70	19
	102-0418	LED-8-40/16W-80W/PC Amber-3000K	12651	104 W	60/80	8.60
	102-0418_1	LED-8/16W/PC Amber	1600.4	18 W	60	8.60
	102-0418_2	LED-40/80W/3000K	11050.6	86 W	80	8.60
pedestrian crossing, right-hand traffic [P46R]	102-0304	LED-16-32/16W-64W/True Amber-2200K	8716.4	83 W	NA/70	19
	102-0304_1	LED-16/16W/True Amber	601.1	15 W	NA	19
	102-0304_2	LED-32/64W/2200K	8115.3	68 W	70	19
	102-0417	LED-8-40/16W-80W/PC Amber-3000K	12473.4	104 W	60/80	8.60
	102-0417_1	LED-8/16W/PC Amber	1578	18 W	60	8.60
	102-0417_2	LED-40/80W/3000K	10895.5	86 W	80	8.60
rectangular, side throw [R60]	102-0296	LED-16-32/16W-64W/True Amber-2200K	8459.7	83 W	NA/70	19
	102-0296_1	LED-16/16W/True Amber	583.4	15 W	NA	19
	102-0296_2	LED-32/64W/2200K	7876.3	68 W	70	19
	102-0413	LED-8-40/16W-80W/PC Amber-3000K	12106.2	104 W	60/80	8.60
	102-0413_1	LED-8/16W/PC Amber	1531.5	18 W	60	8.60
	102-0413_2	LED-40/80W/3000K	10574.7	86 W	80	8.60
rectangular, side throw [R61]	102-0391	LED-16-32/16W-64W/True Amber-2200K	7669.9	83 W	NA/70	19
	102-0391_1	LED-16/16W/True Amber	529	15 W	NA	19
	102-0391_2	LED-32/64W/2200K	7140.9	68 W	70	19
	102-0421	LED-8-40/16W-80W/PC Amber-3000K	10975.9	104 W	60/80	8.60
	102-0421_1	LED-8/16W/PC Amber	1388.5	18 W	60	8.60

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

AFL130-WL LED

Street and Area Lighting

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	102-0421_2	LED-40/80W/3000K	9587.4	86 W	80	8.60
square distribution [Q66] 	102-0302	LED-16-32/16W-64W/True Amber-2200K	8287.9	83 W	NA/70	19
	102-0302_1	LED-16/16W/True Amber	571.6	15 W	NA	19
	102-0302_2	LED-32/64W/2200K	7716.3	68 W	70	19
	102-0416	LED-8-40/16W-80W/PC Amber-3000K	11860.3	104 W	60/80	8.60
	102-0416_1	LED-8/16W/PC Amber	1500.4	18 W	60	8.60
	102-0416_2	LED-40/80W/3000K	10359.9	86 W	80	8.60

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Mounting Accessories


Bird deterrent

Description	Part ID
Bird deterrent BD	430-0015




Adaptor

Description	Part ID
Adaptor AFL100	102-0392



Wall and pole brackets RE

Description	Part ID	C1	D1	D2	D x L1	H1	M1	Weight (lb)
RE2-540 Pole bracket, double	111-0043	7.87			3 x 5	21.65		11.68

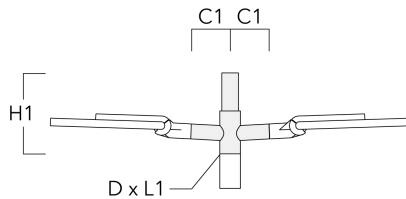

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


AFL130-WL LED

Street and Area Lighting

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (lb)
RE0-540 Wall bracket	111-0084	7.09	9.06	7.68			0.47	7.05

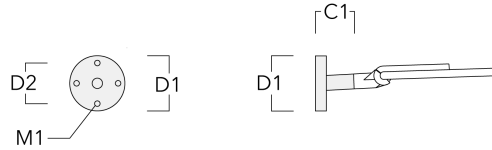

RE1-540 Pole bracket, single	111-0042	200			3 x 5	500		4.60
------------------------------	----------	-----	--	--	-------	-----	--	------




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

Pole brackets RF

Description	Part ID	C1	D x L1	H1	Weight (lb)
RF2-540 Pole bracket, double	111-0047	7.87	3 x 3	7.87	7.28

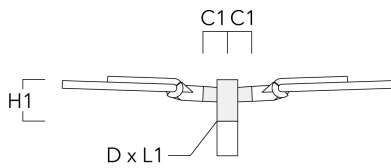


RF1-540 Pole bracket, single	111-0046	200	3 x 3	200	2.60
------------------------------	----------	-----	-------	-----	------




Wall and pole brackets RX

Description	Part ID	C1	D1	D2	D x L1	H1	H2	M1	M2	Weight (lb)
RX1-540 Pole bracket, single	111-0054	39.37			2.99 x 3.15	21.65				14.99

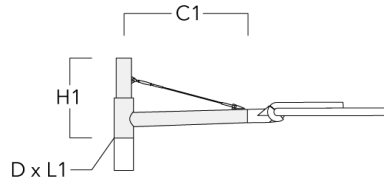

RX2-540 Pole bracket, double	111-0055	39.37			2.99 x 3.15	21.65				21.38
------------------------------	----------	-------	--	--	-------------	-------	--	--	--	-------

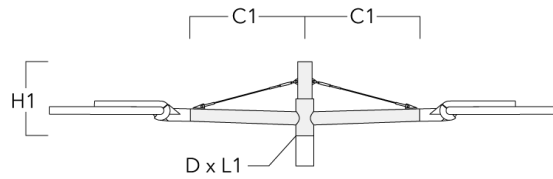


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (lb)
RX0-540 Wall bracket	111-0086	39.37	5.51	3.94		17.72	15.16	1.18	0.47	11.46

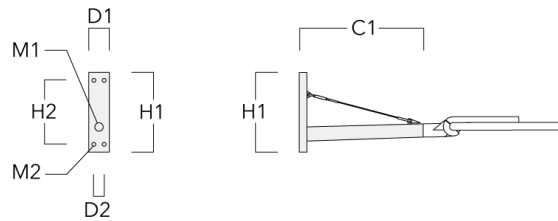

Optical Accessories

Backlight shield

Description	Part ID	Additional information
LS180	430-0029	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S61][S66][R61][P66][Q66][A61] lenses. Must be specified at time of ordering.

