


SBI440[A]

Ceiling luminaires

we-ef

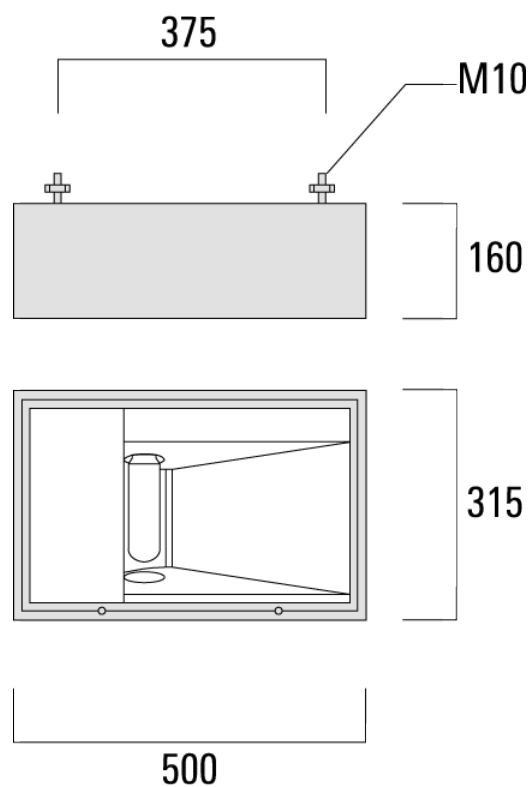

WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 06/10/2025

Ceiling luminaires**Description**

IP54. Marine-grade aluminium alloy body. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Anodised aluminium reflector. 40°C ambient temperature rating. Integral HPF control gear in thermally separated compartment. LPF versions are available on request. Optional (factory-installed) LIS lamp ignition sensor activates an integral tungsten halogen lamp following a cold start or a momentary power interruption.

SBI440[A]



Ceiling luminaires

Specifications
Material description

Colours		RAL9004 Signal black
		RAL9006 White aluminium
		RAL9007 Grey aluminium
Corrosion resistance	5CE+Primer	

Electrical description

Additional information

SBI440[A]

Ceiling luminaires

we-ef

Options

Light distribution Colour temperature Nominal Watt

WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 06/10/2025

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------