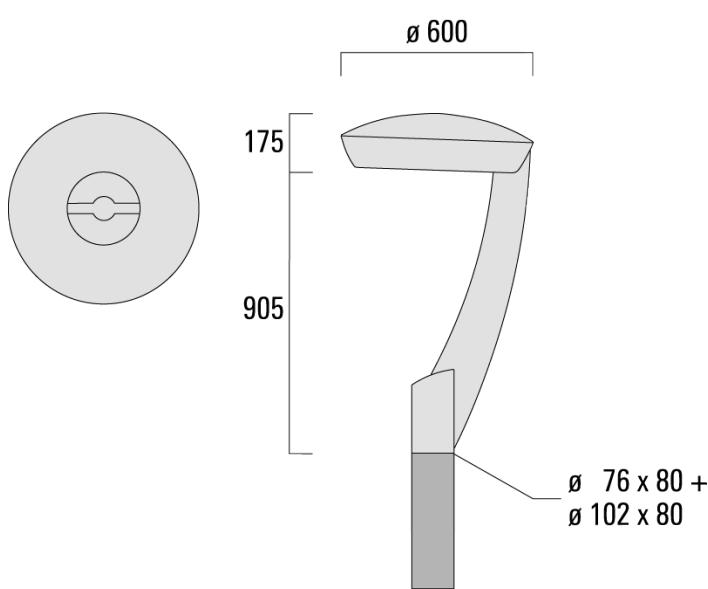


Pole mounted**Description**

IP66, Class I. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gaskets. Safety glass lens. Control gear on hinged and 'no tool' removable gear tray. Anodised aluminium reflector, for beam efficiency and glare control. 'No tool' lamp replacement.

Recommended mounting height 2,5-8,0 m, depending on lamp type selected.

Pole mounted**Specifications****Material description**

Colours



RAL9004 Signal black



RAL9006 White aluminium



RAL9007 Grey aluminium

Electrical description**Additional information**

Options**Light distribution Colour temperature Nominal Watt**

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)

Pole mounted**Mounting Accessories****Wall and pole brackets RB**

Description	Part ID	C1	D x L1	H1	Weight(kg)	C
RB1-660 MA Single bracket	106-0400	1300	76 x 80 + 102 x 80	750	17.90	1300

