






Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Non-reflecting safety glass lens, hinged with safety switch. Integral EC electronic converter in thermally separated compartment. DALI. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Brackets to be ordered separately.

Pole mounted**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflecting safety glass lens, hinged
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.166 m ²

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	6/6 kV

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)







RFL530-SE LED

Pole mounted




we-ef

Options

Light distribution

	asymmetric, side throw beam [S60]
	asymmetric, side throw [S70]
	asymmetric, forward throw [A60]
	asymmetric, side throw beam [S65]
	rectangular, side throw [R65]
	pedestrian/bicycle lane [P65]

Colour temperature

	3000 K
	4000 K
	2700 K

Nominal Watt



33 W
61 W
15 W
32 W
18 W
72 W
81 W

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	111-0275	LED-12/24W / 700 mA - 3000 K	2891.7	27 W	80	9.30
	111-0275-70	LED-12/24W / 700 mA - 3000 K	3290.6	27 W	70	9.30
	111-0277	LED-24/48W / 700 mA - 3000 K	5783.5	54 W	80	9.30
	111-0277-70	LED-24/48W / 700 mA - 3000 K	6581.2	54 W	70	9.30
	111-0353	LED-12/24W / 700 mA - 4000 K	3091.2	27 W	80	9.30
	111-0353-70	LED-12/24W / 700 mA - 4000 K	3490	27 W	70	9.30
	111-0355	LED-24/48W / 700 mA - 4000 K	6182.3	54 W	80	9.30
	111-0355-70	LED-24/48W / 700 mA - 4000 K	6980	54 W	70	9.30
	111-0414	LED-12/12W / 350 mA - 4000 K	1784.4	13.9 W	80	9.30
	111-0414-70	LED-12/12W / 350 mA - 4000 K	1994.3	13.9 W	70	9.30
	111-0415	LED-24/24W / 350 mA - 4000 K	3568.7	26.5 W	80	9.30
	111-0415-70	LED-24/24W / 350 mA - 4000 K	3988.6	26.5 W	70	9.30
	111-0455	LED-12/12W / 350 mA - 3000 K	1626.9	13.9 W	80	9.30
	111-0455-70	LED-12/12W / 350 mA - 3000 K	1889.3	13.9 W	70	9.30
	111-0457	LED-24/24W / 350 mA - 3000 K	3253.8	26.5 W	80	9.30
	111-0457-70	LED-24/24W / 350 mA - 3000 K	3778.7	26.5 W	70	9.30
	111-0908	LED-24/72W / 1050 mA - 3000 K	9180.5	81 W	80	9.30
	111-0908-70	LED-24/72W / 1050 mA - 3000 K	10461.5	81 W	70	9.30
	111-0909	LED-24/72W / 1050 mA - 4000 K	9607.5	81 W	80	9.30
	111-0909-70	LED-24/72W / 1050 mA - 4000 K	10888.5	81 W	70	9.30
	111-1046	LED-12/12W / 350 mA - 2700 K	1522	13.9 W	80	9.30
	111-1046-70	LED-12/12W / 350 mA - 2700 K	1626.9	13.9 W	70	9.30
	111-1047	LED-12/24W / 700 mA - 2700 K	2692.3	27 W	80	9.30
	111-1047-70	LED-12/24W / 700 mA - 2700 K	2891.7	27 W	70	9.30
	111-1048	LED-24/24W / 350 mA - 2700 K	3043.9	26.5 W	80	9.30
	111-1048-70	LED-24/24W / 350 mA - 2700 K	3253.8	26.5 W	70	9.30
	111-1049	LED-24/48W / 700 mA - 2700 K	5384.6	54 W	80	9.30
111-1049-70	LED-24/48W / 700 mA - 2700 K	5783.5	54 W	70	9.30	
111-1050	LED-24/72W / 1050 mA - 2700 K	8753.5	81 W	80	9.30	
asymmetric, side throw [S70] 	111-0230	LED-12/24W / 700 mA - 3000 K	2984.1	27 W	80	9.30
	111-0230-70	LED-12/24W / 700 mA - 3000 K	3395.7	27 W	70	9.30
	111-0234	LED-24/48W / 700 mA - 3000 K	5968.1	54 W	80	9.30
	111-0234-70	LED-24/48W / 700 mA - 3000 K	6791.3	54 W	70	9.30
	111-0345	LED-12/24W / 700 mA - 4000 K	3189.9	27 W	80	9.30
	111-0345-70	LED-12/24W / 700 mA - 4000 K	3601.5	27 W	70	9.30


Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	111-0347	LED-24/48W / 700 mA - 4000 K	6379.7	54 W	80	9.30
	111-0347-70	LED-24/48W / 700 mA - 4000 K	7202.9	54 W	70	9.30
	111-0412	LED-12/12W / 350 mA - 4000 K	1836.7	13.9 W	80	9.30
	111-0412-70	LED-12/12W / 350 mA - 4000 K	2052.8	13.9 W	70	9.30
	111-0413	LED-24/24W / 350 mA - 4000 K	3673.4	26.5 W	80	9.30
	111-0413-70	LED-24/24W / 350 mA - 4000 K	4105.6	26.5 W	70	9.30
	111-0451	LED-12/12W / 350 mA - 3000 K	1674.6	13.9 W	80	9.30
	111-0451-70	LED-12/12W / 350 mA - 3000 K	1944.7	13.9 W	70	9.30
	111-0453	LED-24/24W / 350 mA - 3000 K	3349.3	26.5 W	80	9.30
	111-0453-70	LED-24/24W / 350 mA - 3000 K	3889.5	26.5 W	70	9.30
	111-0862	LED-24/48W / 700 mA - 2700 K	5556.5	54 W	80	9.30
	111-0862-70	LED-24/48W / 700 mA - 2700 K	5968.1	54 W	70	9.30
	111-0918	LED-24/72W / 1050 mA - 3000 K	9210.3	81 W	80	9.30
	111-0918-70	LED-24/72W / 1050 mA - 3000 K	10495.4	81 W	70	9.30
	111-0919	LED-24/72W / 1050 mA - 4000 K	9638.6	81 W	80	9.30
	111-0919-70	LED-24/72W / 1050 mA - 4000 K	10923.8	81 W	70	9.30
	111-1036	LED-12/12W / 350 mA - 2700 K	1566.6	13.9 W	80	9.30
	111-1036-70	LED-12/12W / 350 mA - 2700 K	1674.6	13.9 W	70	9.30
	111-1037	LED-12/24W / 700 mA - 2700 K	2778.3	27 W	80	9.30
	111-1037-70	LED-12/24W / 700 mA - 2700 K	2984.1	27 W	70	9.30
	111-1038	LED-24/24W / 350 mA - 2700 K	3133.2	26.5 W	80	9.30
	111-1038-70	LED-24/24W / 350 mA - 2700 K	3349.3	26.5 W	70	9.30
	111-1040	LED-24/72W / 1050 mA - 2700 K	8781.9	81 W	80	9.30
	111-1040-70	LED-24/72W / 1050 mA - 2700 K	10067	81 W	70	9.30
asymmetric, side throw beam [S60]	111-0192	LED-12/24W / 700 mA - 3000 K	3126.9	27 W	80	9.30
	111-0192-70	LED-12/24W / 700 mA - 3000 K	3558.2	27 W	70	9.30
	111-0193	LED-24/48W / 700 mA - 3000 K	6253.8	54 W	80	9.30
	111-0193-70	LED-24/48W / 700 mA - 3000 K	7116.4	54 W	70	9.30
	111-0337	LED-12/24W / 700 mA - 4000 K	3342.6	27 W	80	9.30
	111-0337-70	LED-12/24W / 700 mA - 4000 K	3773.9	27 W	70	9.30
	111-0339	LED-24/48W / 700 mA - 4000 K	6685.1	54 W	80	9.30
	111-0339-70	LED-24/48W / 700 mA - 4000 K	7547.7	54 W	70	9.30
	111-0406	LED-12/12W / 350 mA - 4000 K	1891	13.9 W	80	9.30
	111-0406-70	LED-12/12W / 350 mA - 4000 K	2113.5	13.9 W	70	9.30
	111-0407	LED-24/24W / 350 mA - 4000 K	3782	26.5 W	80	9.30
	111-0407-70	LED-24/24W / 350 mA - 4000 K	4226.9	26.5 W	70	9.30

asymmetric, side throw beam [S60]




Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	111-0447	LED-12/12W / 350 mA - 3000 K	1724.1	13.9 W	80	9.30
	111-0447-70	LED-12/12W / 350 mA - 3000 K	2002.2	13.9 W	70	9.30
	111-0449	LED-24/24W / 350 mA - 3000 K	3448.3	26.5 W	80	9.30
	111-0449-70	LED-24/24W / 350 mA - 3000 K	4004.4	26.5 W	70	9.30
	111-0914	LED-24/72W / 1050 mA - 3000 K	9567.7	81 W	80	9.30
	111-0914-70	LED-24/72W / 1050 mA - 3000 K	10902.7	81 W	70	9.30
	111-0915	LED-24/72W / 1050 mA - 4000 K	10012.7	81 W	80	9.30
	111-0915-70	LED-24/72W / 1050 mA - 4000 K	11347.7	81 W	70	9.30
	111-1026	LED-12/12W / 350 mA - 2700 K	1612.9	13.9 W	80	9.30
	111-1026-70	LED-12/12W / 350 mA - 2700 K	1724.1	13.9 W	70	9.30
	111-1027	LED-12/24W / 700 mA - 2700 K	2911.3	27 W	80	9.30
	111-1027-70	LED-12/24W / 700 mA - 2700 K	3126.9	27 W	70	9.30
	111-1028	LED-24/24W / 350 mA - 2700 K	3225.8	26.5 W	80	9.30
	111-1028-70	LED-24/24W / 350 mA - 2700 K	3448.3	26.5 W	70	9.30
	111-1029	LED-24/48W / 700 mA - 2700 K	5822.5	54 W	80	9.30
	111-1029-70	LED-24/48W / 700 mA - 2700 K	6253.8	54 W	70	9.30
	111-1030	LED-24/72W / 1050 mA - 2700 K	9122.7	81 W	80	9.30
	111-1030-70	LED-24/72W / 1050 mA - 2700 K	10457.7	81 W	70	9.30
asymmetric, side throw beam [S65]	111-0408	LED-12/12W / 350 mA - 4000 K	1893.1	13.9 W	80	9.30
	111-0408-70	LED-12/12W / 350 mA - 4000 K	2115.8	13.9 W	70	9.30
	111-0409	LED-12/24W / 700 mA - 4000 K	3348	27 W	80	9.30
	111-0409-70	LED-12/24W / 700 mA - 4000 K	3780	27 W	70	9.30
	111-0410	LED-24/24W / 350 mA - 4000 K	3786.2	26.5 W	80	9.30
	111-0410-70	LED-24/24W / 350 mA - 4000 K	4231.6	26.5 W	70	9.30
	111-0411	LED-24/48W / 700 mA - 4000 K	6696.1	54 W	80	9.30
	111-0411-70	LED-24/48W / 700 mA - 4000 K	7560.1	54 W	70	9.30
	111-0459	LED-12/12W / 350 mA - 3000 K	1726	13.9 W	80	9.30
	111-0459-70	LED-12/12W / 350 mA - 3000 K	2004.4	13.9 W	70	9.30
	111-0461	LED-12/24W / 700 mA - 3000 K	3132	27 W	80	9.30
	111-0461-70	LED-12/24W / 700 mA - 3000 K	3564	27 W	70	9.30
	111-0463	LED-24/24W / 350 mA - 3000 K	3452.1	26.5 W	80	9.30
	111-0463-70	LED-24/24W / 350 mA - 3000 K	4008.9	26.5 W	70	9.30
	111-0465	LED-24/48W / 700 mA - 3000 K	6264.1	54 W	80	9.30
	111-0465-70	LED-24/48W / 700 mA - 3000 K	7128.1	54 W	70	9.30
	111-0916	LED-24/72W / 1050 mA - 3000 K	9611.3	81 W	80	9.30
	111-0916-70	LED-24/72W / 1050 mA - 3000 K	10952.4	81 W	70	9.30


Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	111-0917	LED-24/72W / 1050 mA - 4000 K	10058.4	81 W	80	9.30
	111-0917-70	LED-24/72W / 1050 mA - 4000 K	11399.5	81 W	70	9.30
	111-1031	LED-12/12W / 350 mA - 2700 K	1614.7	13.9 W	80	9.30
	111-1031-70	LED-12/12W / 350 mA - 2700 K	1726	13.9 W	70	9.30
	111-1032	LED-12/24W / 700 mA - 2700 K	2916	27 W	80	9.30
	111-1032-70	LED-12/24W / 700 mA - 2700 K	3132	27 W	70	9.30
	111-1033	LED-24/24W / 350 mA - 2700 K	3229.4	26.5 W	80	9.30
	111-1033-70	LED-24/24W / 350 mA - 2700 K	3452.1	26.5 W	70	9.30
	111-1034	LED-24/48W / 700 mA - 2700 K	5832.1	54 W	80	9.30
	111-1034-70	LED-24/48W / 700 mA - 2700 K	6264.1	54 W	70	9.30
	111-1035	LED-24/72W / 1050 mA - 2700 K	9164.3	81 W	80	9.30
	111-1035-70	LED-24/72W / 1050 mA - 2700 K	10505.4	81 W	70	9.30
pedestrian/bicycle lane [P65]	111-0780	LED-12/12W / 350 mA - 3000 K	1687	13.9 W	80	9.30
	111-0780-70	LED-12/12W / 350 mA - 3000 K	1959.1	13.9 W	70	9.30
	111-0791	LED-24/24W / 350 mA - 3000 K	3374	26.5 W	80	9.30
	111-0791-70	LED-24/24W / 350 mA - 3000 K	3918.1	26.5 W	70	9.30
	111-0821	LED-12/12W / 350 mA - 4000 K	1850.2	13.9 W	80	9.30
	111-0821-70	LED-12/12W / 350 mA - 4000 K	2067.9	13.9 W	70	9.30
	111-0822	LED-12/24W / 700 mA - 4000 K	3272.8	27 W	80	9.30
	111-0822-70	LED-12/24W / 700 mA - 4000 K	3695.1	27 W	70	9.30
	111-0823	LED-24/24W / 350 mA - 4000 K	3700.5	26.5 W	80	9.30
	111-0823-70	LED-24/24W / 350 mA - 4000 K	4135.8	26.5 W	70	9.30
	111-0824	LED-24/48W / 700 mA - 4000 K	6545.5	54 W	80	9.30
	111-0824-70	LED-24/48W / 700 mA - 4000 K	7390.1	54 W	70	9.30
	111-0827	LED-12/24W / 700 mA - 3000 K	3061.6	27 W	80	9.30
	111-0827-70	LED-12/24W / 700 mA - 3000 K	3483.9	27 W	70	9.30
	111-0828	LED-24/48W / 700 mA - 3000 K	6123.2	54 W	80	9.30
	111-0828-70	LED-24/48W / 700 mA - 3000 K	6967.8	54 W	70	9.30
	111-0910	LED-24/72W / 1050 mA - 3000 K	9105.5	81 W	80	9.30
	111-0910-70	LED-24/72W / 1050 mA - 3000 K	10376	81 W	70	9.30
	111-0911	LED-24/72W / 1050 mA - 4000 K	9529	81 W	80	9.30
	111-0911-70	LED-24/72W / 1050 mA - 4000 K	10799.5	81 W	70	9.30
	111-1051	LED-12/12W / 350 mA - 2700 K	1578.1	13.9 W	80	9.30
	111-1051-70	LED-12/12W / 350 mA - 2700 K	1687	13.9 W	70	9.30
	111-1052	LED-12/24W / 700 mA - 2700 K	2850.5	27 W	80	9.30
	111-1052-70	LED-12/24W / 700 mA - 2700 K	3061.6	27 W	70	9.30

pedestrian/bicycle lane [P65]



Pole mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	111-1053	LED-24/24W / 350 mA - 2700 K	3156.3	26.5 W	80	9.30
	111-1053-70	LED-24/24W / 350 mA - 2700 K	3374	26.5 W	70	9.30
	111-1054	LED-24/48W / 700 mA - 2700 K	5700.9	54 W	80	9.30
	111-1054-70	LED-24/48W / 700 mA - 2700 K	6123.2	54 W	70	9.30
	111-1055	LED-24/72W / 1050 mA - 2700 K	8682	81 W	80	9.30
	111-1055-70	LED-24/72W / 1050 mA - 2700 K	9952.5	81 W	70	9.30
rectangular, side throw [R65]	111-0416	LED-12/12W / 350 mA - 4000 K	1780.6	13.9 W	80	9.30
	111-0416-70	LED-12/12W / 350 mA - 4000 K	1990.1	13.9 W	70	9.30
	111-0417	LED-12/24W / 700 mA - 4000 K	3084.3	27 W	80	9.30
	111-0417-70	LED-12/24W / 700 mA - 4000 K	3482.3	27 W	70	9.30
	111-0418	LED-24/24W / 350 mA - 4000 K	3561.2	26.5 W	80	9.30
	111-0418-70	LED-24/24W / 350 mA - 4000 K	3980.2	26.5 W	70	9.30
	111-0419	LED-24/48W / 700 mA - 4000 K	6168.6	54 W	80	9.30
	111-0419-70	LED-24/48W / 700 mA - 4000 K	6964.5	54 W	70	9.30
	111-0467	LED-12/12W / 350 mA - 3000 K	1623.5	13.9 W	80	9.30
	111-0467-70	LED-12/12W / 350 mA - 3000 K	1885.4	13.9 W	70	9.30
	111-0469	LED-12/24W / 700 mA - 3000 K	2885.3	27 W	80	9.30
	111-0469-70	LED-12/24W / 700 mA - 3000 K	3283.3	27 W	70	9.30
	111-0471	LED-24/24W / 350 mA - 3000 K	3247	26.5 W	80	9.30
	111-0471-70	LED-24/24W / 350 mA - 3000 K	3770.7	26.5 W	70	9.30
	111-0473	LED-24/48W / 700 mA - 3000 K	5770.6	54 W	80	9.30
	111-0473-70	LED-24/48W / 700 mA - 3000 K	6566.5	54 W	70	9.30
	111-0912	LED-24/72W / 1050 mA - 3000 K	9057.4	81 W	80	9.30
	111-0912-70	LED-24/72W / 1050 mA - 3000 K	10321.2	81 W	70	9.30
	111-0913	LED-24/72W / 1050 mA - 4000 K	9478.6	81 W	80	9.30
	111-0913-70	LED-24/72W / 1050 mA - 4000 K	10742.5	81 W	70	9.30
	111-1041	LED-12/12W / 350 mA - 2700 K	1518.8	13.9 W	80	9.30
	111-1041-70	LED-12/12W / 350 mA - 2700 K	1623.5	13.9 W	70	9.30
	111-1042	LED-12/24W / 700 mA - 2700 K	2686.3	27 W	80	9.30
	111-1042-70	LED-12/24W / 700 mA - 2700 K	2885.3	27 W	70	9.30
	111-1043	LED-24/24W / 350 mA - 2700 K	3037.5	26.5 W	80	9.30
	111-1043-70	LED-24/24W / 350 mA - 2700 K	3247	26.5 W	70	9.30
	111-1044	LED-24/48W / 700 mA - 2700 K	5372.6	54 W	80	9.30
	111-1044-70	LED-24/48W / 700 mA - 2700 K	5770.6	54 W	70	9.30
	111-1045	LED-24/72W / 1050 mA - 2700 K	8636.1	81 W	80	9.30
	111-1045-70	LED-24/72W / 1050 mA - 2700 K	9899.9	81 W	70	9.30

RFL530-SE LED

Pole mounted

we-ef

Control

Eco Step Dim® Basic

Description	Part ID
Eco Step Dim® Basic LED	430-0001

Eco Step Dim® Advanced

Description	Part ID
Eco Step Dim® Advanced LED	430-0002

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>


Subject to technical changes and errors. - Generated on 23/11/2024

Pole mounted


Mounting Accessories

Wall and pole brackets RE

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)	C	H
RE0-530 Wall bracket	111-0052	180	230	195			12	2.90	120	

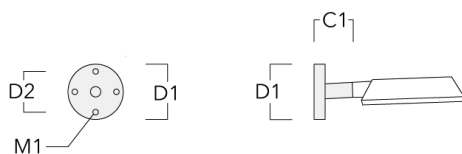


RE1-530 Pole bracket, single	111-0040	180			76 x 80	400		3.20	180	400
------------------------------	----------	-----	--	--	---------	-----	--	------	-----	-----




Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)	C	H
RE2-530 Pole bracket, double	111-0041	180			76 x 80	400		3.60	180	400

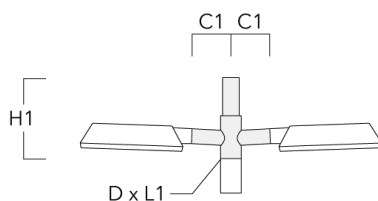


Pole brackets RF

Description	Part ID	C1	D × L1	H1	Weight (kg)	C	H
RF1-530 Pole bracket, single	111-0044	190	76 x 80	275	2.30	190	275




Pole mounted

Description	Part ID	C1	D × L1	H1	Weight (kg)	C	H
RF2-530 Pole bracket, double	111-0045	190	76 x 80	275	3.00	190	275

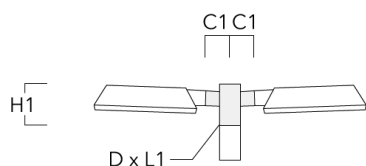

Wall and pole brackets RI


Description	Part ID	C1	D1	H1	Weight (kg)	D	H
RI-530 Wall and pole bracket	111-0178	184-255	76-133	127	1.85	102-133	96




Pole mounted

Wall and pole brackets RX

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX0-530 Wall bracket	111-0053	710	140	100		350	285	30	12	3.30

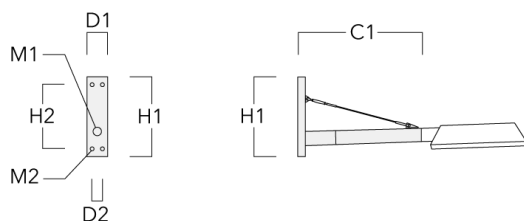


RX1-530 Pole bracket, single	111-0088	710			76 x 80	400				4.50
------------------------------	----------	-----	--	--	---------	-----	--	--	--	------

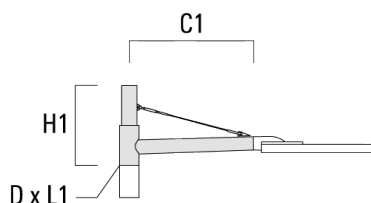


Pole mounted

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX2-530 Pole bracket, double	111-0089	710			76 x 80	400				6.20

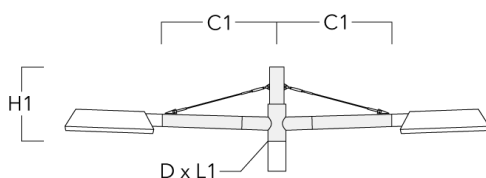


Tilt brackets TB

Description	Part ID	A	D1	D2	L	Weight (kg)
TB-530.42-10 Tilt bracket 10°	111-0639	10°	42 x 90	42 x 100	205	0.50



Pole mounted

Description	Part ID	A	D1	D2	L	Weight (kg)
TB-530.42-15 Tilt bracket 15°	111-0640	15°	42 x 90	42 x 100	205	0.50



Optical Accessories**Light shield**

Description	Part ID	Additional information
LS180-[A60]	430-0038	Light shield LS180 to greatly reduce or eliminate light pollution. PA injection moulded component, black matt. Suitable for asymmetric light distribution [A60].
LS180	430-0029	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering.