

**ETC130-GB LED**  
**Inground Luminaires**

**we-ef**




**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

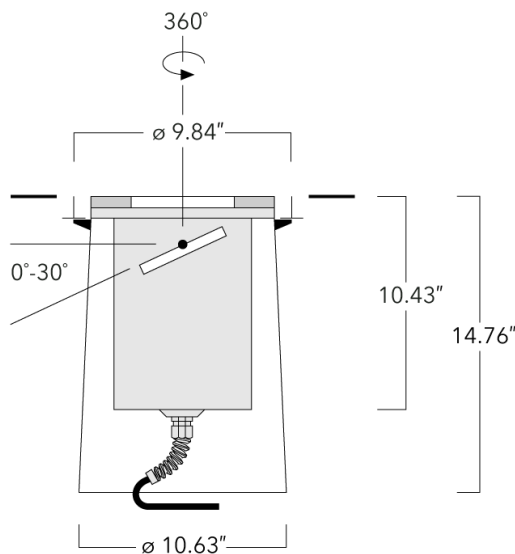**Description**

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.

Suitable for flush installation in concrete or earth. The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

# ETC130-GB LED

## Inground Luminaires



Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

### **WE-EF LIGHTING USA, LLC**


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

**Inground Luminaires****Specifications****Material description**

---

Body	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Lens	5/8" thick clear tempered glass lens. Max. load 5000kg/11,000 lbs.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK10+
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Termination	Factory sealed termination chamber
Power factor	> 0.9
Surge protection	Integral 10kV Surge Protector

---

**Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Dimming	0-10V available in request. Must be factory fitted.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

# ETC130-GB LED

## Inground Luminaires

### Options

#### Light distribution



symmetric, medium beam [M]



linear spread, medium beam [M]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam, 'sharp cut-off'



symmetric, wide beam [W]



symmetric, very narrow beam [VN]



linear spread, very narrow beam [VN]



wallwash



asymmetric, wallgrazer [A6]

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt

21 W

0 W








#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
asymmetric, wallgrazer [A6] 	185-3691	LED-12/18W / 500 mA - 2700 K	1856.4	21 W	80	18.20
linear spread, medium beam [M] 	185-2446+185-2632	LED-12/18W / 500 mA - 3000 K	1819.8	21 W	80	18.20
	185-2447+185-2632	LED-12/18W / 500 mA - 4000 K	1819.8	21 W	80	18.20
linear spread, very narrow beam [VN] 	185-2661+185-2632	LED-12/18W / 500 mA - 3000 K	1973.5	21 W	80	18.20
	185-2662+185-2632	LED-12/18W / 500 mA - 4000 K	2111.2	21 W	80	18.20
	185-3141+185-2632	LED-12/18W / 500 mA - 2700 K	1835.8	21 W	80	18.20
linear spread, very narrow beam, 'sharp cut-off' 	185-2591+185-2632	LED-12/18W / 500 mA - 3000 K	2061	21 W	80	18.20
	185-2592+185-2632	LED-12/18W / 500 mA - 4000 K	2204.8	21 W	80	18.20
	185-3542+185-2632	LED-12/18W / 500 mA - 2700 K	1917.2	21 W	80	18.20
symmetric, medium beam [M] 	185-2446	LED-12/18W / 500 mA - 3000 K	2238.7	21 W	80	18.20
	185-2447	LED-12/18W / 500 mA - 4000 K	2394.8	21 W	80	18.20
	185-3527	LED-12/18W / 500 mA - 2700 K	2082.5	21 W	80	18.20
symmetric, very narrow beam [VN] 	185-2661	LED-12/18W / 500 mA - 3000 K	2113.4	21 W	80	18.20
	185-2662	LED-12/18W / 500 mA - 4000 K	2260.9	21 W	80	18.20
	185-3141	LED-12/18W / 500 mA - 2700 K	1966	21 W	80	18.20
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	185-2591	LED-12/18W / 500 mA - 3000 K	2248.6	21 W	80	18.20
	185-2592	LED-12/18W / 500 mA - 4000 K	2405.5	21 W	80	18.20
	185-3542	LED-12/18W / 500 mA - 2700 K	2091.8	21 W	80	18.20

## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

# ETC130-GB LED

## Inground Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric, wide beam [W]	185-2658	LED-12/18W / 500 mA - 3000 K	1950.6	21 W	80	18.20
	185-2659	LED-12/18W / 500 mA - 4000 K	2086.6	21 W	80	18.20
	185-3541	LED-12/18W / 500 mA - 2700 K	1814.5	21 W	80	18.20
wallwash	185-3091	LED-12/18W / 500 mA - 3000 K	1802.7	21 W	80	18.20
	185-3092	LED-12/18W / 500 mA - 4000 K	1928.5	21 W	80	18.20
	185-3707	LED-12/18W / 500 mA - 2700 K	1676.9	21 W	80	18.20

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024


**Electrical Accessories**

**Sealable junction box**

---

Description	Part ID	C1	M1	M2
Sealable junction box SJB 130	185-1624	5.75	Ø 0.39	Ø 0.47 - 0.75

---

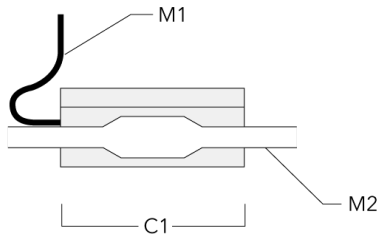





**Optical Accessories**

**Linear spread lens**

Description	Part ID	Additional information	C1
IO-180 ETC130/330-GB LED	185-2632		3.94



IO-180-DAC120-LED	134-2000	Broadens light distribution in one plane only. Ideally suitable for [M][VN][VNS]. Does not fit in combination with [W] lens. A maximum of one internal optical accessory. Internal component, factory installed.	4.05
-------------------	----------	---	------



# ETC130-GB LED


## Inground Luminaires

### Softening Lens

---

Description	Part ID	C1
I0-360-ETC130-GB-LED	185-2866	3.86

---




---

### Honeycomb louvre

---

Description	Part ID	C1
IW-ETC130/330-GB-LED	185-2870	3.86

---



---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

**ETC130-GB LED**  
**Inground Luminaires**

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086  
Phone: +1 724 742 0030

customersupport.usa@we-ef.com  
<https://we-ef.com/us>

Subject to technical changes and errors.  
Generated on 10/23/2024