


STG209 LED

Wall luminaires recessed

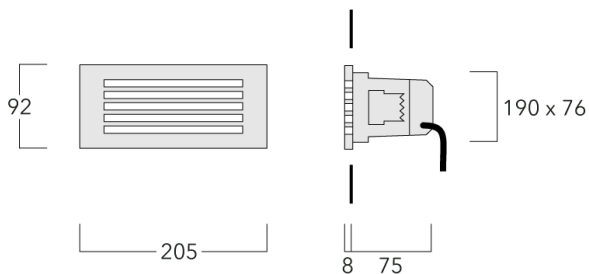

Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Stainless steel mounting claws. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Integral EC Electronic convertor. High efficiency LEDs in 3000 K or 4000 K. Optional 2200 K version available. To be specified at time of ordering.

Optional pre-installation blockout is recommended for mounting in concrete.

STG209 LED




Wall luminaires recessed

Specifications

Material description

Body Marine-grade, all-aluminium construction

Colours

-  RAL9004 Signal black
-  RAL9006 White aluminium
-  RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Ingress protection IP55

Impact resistance IK10

Corrosion resistance 5CE

Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime Ta=40° L80B10 > 54000h

STG209 LED

Wall luminaires recessed

we-ef

Options

Light distribution Colour temperature Nominal Watt

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

STG209 LED

Wall luminaires recessed



Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024