


STL209 LED

Wall luminaires recessed

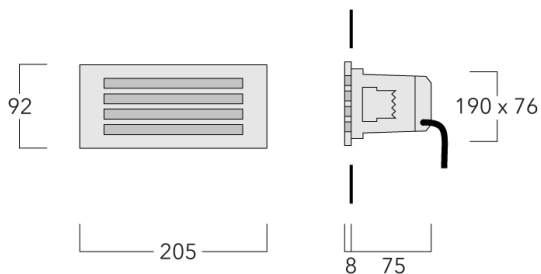

Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter. Optional 2200 K version available. To be specified at time of ordering.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

STL209 LED





Wall luminaires recessed

Specifications

Material description

Body Marine-grade die-cast aluminium alloy

Colours

	RAL9004 Signal black
	RAL9007 Grey aluminium
	RAL7016 Anthracite grey
	RAL9016 Traffic white

Gasket Silicone rubber gasket

Ingress protection IP55

Impact resistance IK10

Corrosion resistance 5CE

Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime Ta=25° L80B10 > 54000h

STL209 LED

Wall luminaires recessed

we-ef

Options

Light distribution Colour temperature Nominal Watt

STL209 LED

Wall luminaires recessed



Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST20-I	133-0075	222	109	105	105



Installation blackout BST20-II	133-0077	222	109	115	115
--------------------------------	----------	-----	-----	-----	-----

