

## STP204 LED


### Wall luminaires recessed

**we-ef**



#### Description

IP55, Class I. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Stainless steel mounting claws. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Integral EC Electronic convertor. High efficiency LEDs in 3000 K or 4000 K.

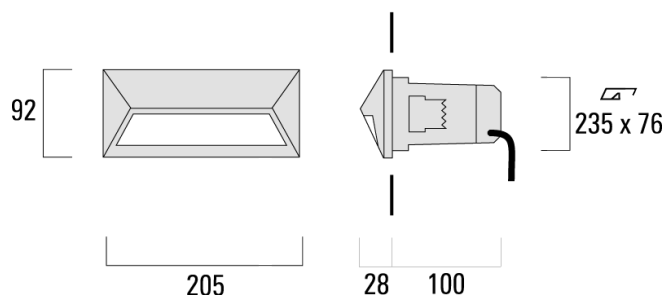

Optional pre-installation blockout is recommended for mounting in concrete.

#### WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 08/06/2025

STP204 LED



Wall luminaires recessed

Specifications

Material description

Colours	<div><div></div></div>	RAL9004 Signal black
	<div><div></div></div>	RAL9006 White aluminium
	<div><div></div></div>	RAL9007 Grey aluminium
Ingress protection	IP66	
Corrosion resistance	5CE+Primer	

Electrical description

Additional information

## STP204 LED

Wall luminaires recessed

**we-ef**

### Options

Light distribution   Colour temperature   Nominal Watt

#### WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499  
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 08/06/2025

STP204 LED



Wall luminaires recessed

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------

STP204 LED



Wall luminaires recessed

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST20-I	133-0075	222	109	105	105

