

STP204 LED

Wall luminaires recessed


we-ef



Description

IP55, Class I. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

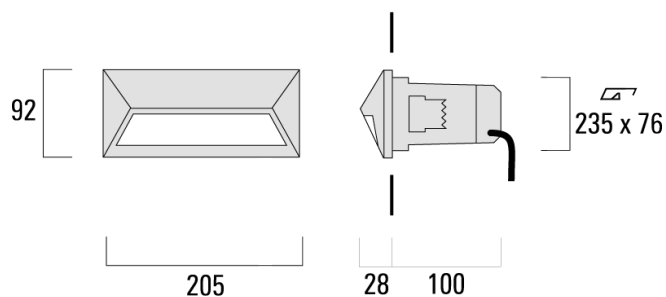

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 01/07/2025






STP204 LED

Wall luminaires recessed



Specifications

Material description

Colours		RAL9004 Signal black
		RAL9006 White aluminium
		RAL9007 Grey aluminium
		RAL7016 Anthracite grey
		RAL9016 Traffic white

Electrical description

Additional information

STP204 LED

Wall luminaires recessed

we-ef

Options

Light distribution Colour temperature Nominal Watt

STP204 LED



Wall luminaires recessed

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------

STP204 LED



Wall luminaires recessed

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST20-I	133-0075	222	109	105	105

