

STP204 LED


Wall luminaires recessed



Description

IP55, Class I. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

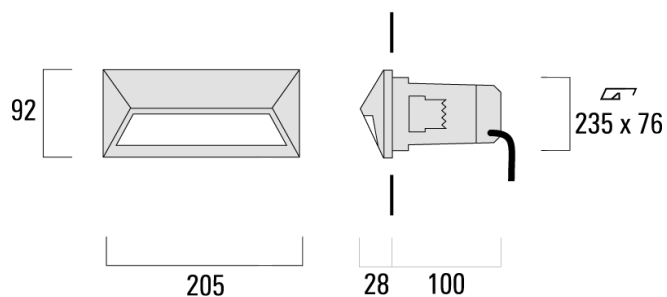

STP204 LED




Wall luminaires recessed

we-ef

Specifications

Material description

Colours

	RAL9004 Signal black
	RAL9006 White aluminium
	RAL9007 Grey aluminium
	RAL7016 Anthracite grey
	RAL9016 Traffic white

Electrical description

Additional information

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/11/2024

STP204 LED

Wall luminaires recessed

we-ef

Options

Light distribution Colour temperature Nominal Watt

STP204 LED

Wall luminaires recessed



Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/11/2024

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST20-I	133-0075	222	109	105	105

