STP204 LED

Wall luminaires recessed

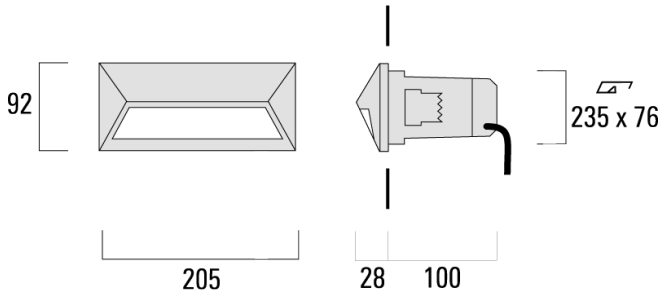

Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.
Pre-installation blockout is recommended for mounting in concrete, available on request.

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter

Additional information

Options

Light distribution	Colour temperature	Nominal Watt
asymmetric, forward-throw [A60]	4000 K	7 W
	3000 K	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60] 	133-9260	LED-3/3W / 350 mA - 3000 K	105.7	5.7 W	80	0.00
	133-9261	LED-3/3W / 350 mA - 4000 K	116	5 W	80	0.00

Mounting Accessories

Installation blockout
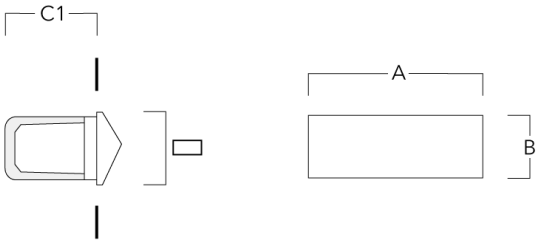
Description	Part ID	A	B	C1	C
Installation blockout BST20-I	133-0075	222	109	105	105