


STP204 LED

Wall luminaires recessed

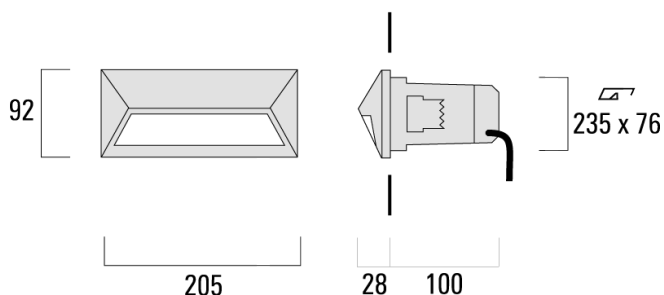

Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.





Pre-installation blockout is recommended for mounting in concrete, available on request.

STP204 LED

Wall luminaires recessed

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

STP204 LED

Wall luminaires recessed

Options

Light distribution



asymmetric, forward-throw [A60]

Colour temperature



4000 K



3000 K


Nominal Watt

7 W

STP204 LED

Wall luminaires recessed

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60] 	133-9260	LED-3/3W / 350 mA - 3000 K	105.7	5.7 W	80	0.00
	133-9261	LED-3/3W / 350 mA - 4000 K	116	5 W	80	0.00

STP204 LED

Wall luminaires recessed

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST20-I	133-0075	222	109	105	105

